

## Reach-Ins

### T Series Reach-Ins

**RATED #1 IN THE INDUSTRY**

#### FEATURES/BENEFITS

- 300 series stainless steel front (the finest stainless available)
- Interior - attractive, NSF approved, white aluminum and 300 series stainless floor
- Anodized quality aluminum ends, back and top
- Positive seal self-closing doors with factory tested (over 1,000,000 times) lifetime guaranteed door hinges and torsion type closure system
- Extruded, aluminum door frames on glass doors
- Adjustable, heavy duty, PVC coated wire shelves
- Foamed-in-place polyurethane high density cell insulation (CFC Free)
- 4" diameter swivel castors standard (2½" diameter swivel castors standard for T-19, T-19G, T-19F & T-19FZ; leg levelers standard for T-12, T-12G, T-12F & T-12FG)
- Legs available for all models (not available on T-12, T-12G, T-12F & T-12FG)
- Door locks standard (not available on T-12, T-12G, T-12F & T-12FG)
- Exterior mounted temperature monitor (not available on T-12, T-12G, T-12F & T-12FG)
- Fluorescent interior lighting (glass door models); patented integrated door light (IDL) standard on glass & combination door models (excludes T-12G & T-12FG)
- Incandescent interior lighting (solid door models)
- Energy efficient, "Low-E", thermal glass on glass door models
- Lifetime guaranteed recessed door handles standard on solid doors
- Remote units available

#### REFRIGERATION UNITS HAVE...

- Oversized and balanced, (134A), refrigeration system, factory sealed and pre-lubricated for long life - holds 33°F to 38°F
- All units available with alternative hinge orientations (no charge)

#### BOTTOM MOUNTED UNITS HAVE...

- A "no-stoop", lower shelf
- Allows for top storage
- Compressor performs in the coolest, most grease-free area of kitchen for ease of compressor load
- Compressor can be serviced easily, and accessed by a single repairman

#### FREEZER UNITS HAVE...

- Oversized and balanced, environmentally friendly R404A, refrigeration system
- -10°F temperature (air off evaporator coil, -20°F) holds frozen food and ice cream (T-19FZ maintains 0°F)
- Standard backguard improves airflow
- Large evaporator and coil heater permit short defrost cycle
- Automatic defrost system time initiated, temperature terminated
- Automatic evaporator fan motor delay during defrost cycle
- All units available with alternative hinge orientations (no charge)



T-72



T-35G



T-49-2-G-2



#### T SERIES REFRIGERATORS

Model	Doors	Cu. Ft.	# of Shelves	HP	Amps	Crated Wt.	L	D†	H*
<b>SOLID DOORS</b>									
T-12	1	12	3	½	4.9	190	24¾" x 23¾" x 63¾"		
T-19	1	19	3	½	8.9	230	27" x 24½" x 75¼"		
T-23	1	23	3	½	7.6	260	27" x 29½" x 78¾"		
T-35	2	35	6	½	7.3	355	39½" x 29½" x 78¾"		
T-49	2	49	6	½	9.1	420	54¾" x 29¼" x 78¾"		
T-72	3	72	9	½	11.8	580	78¾" x 29½" x 79¾"		
T-49PT	2 fr / 2 bk	49	6	½	9.5	520	54¾" x 32½" x 78¾"		
<b>FULL GLASS DOORS</b>									
T-12G	1	12	3	½	5.0	215	24¾" x 23¾" x 63¾"		
T-19G	1	19	3	½	8.9	250	27" x 24¾" x 75¼"		
T-23G	1	23	3	½	7.9	275	27" x 29½" x 78¾"		
T-35G	2	35	6	½	7.3	385	39½" x 29¼" x 78¾"		
T-49G	2	49	6	½	9.1	455	54¾" x 29¼" x 78¾"		
T-72G	3	72	9	½	12.9	665	78¾" x 29¼" x 79¾"		
<b>SOLID HALF DOORS</b>									
T-23-2	2 s/s	23	3	½	7.5	275	27" x 29½" x 78¾"		
T-49-4	4 s/s	49	6	½	9.1	430	54¾" x 29½" x 78¾"		
T-49-4-PT	6 s/s	49	6	½	9.5	535	54¾" x 32½" x 78¾"		
T-72-6	6 s/s	72	9	½	11.8	615	78¾" x 29½" x 79¾"		
<b>GLASS HALF DOORS</b>									
T-23G-2	2 g/s	23	3	½	7.9	300	27" x 29½" x 78¾"		
T-49G-4	4 g/s	49	6	½	9.1	490	54¾" x 29¼" x 78¾"		
T-72G-6	6 g/s	72	9	½	12.9	700	78½" x 29¼" x 79¾"		
<b>COMBINATION HALF DOORS</b>									
T-23-1-G-1	1 g/s-1 s/s	23	3	½	8.0	285	27" x 29¼" x 78¾"		
T-49-2-G-2	2 g/s-2 s/s	49	6	½	9.1	460	54¾" x 29¼" x 78¾"		
T-72-3-G-3	3 g/s-3 s/s	72	9	½	12.9	650	78¾" x 29¼" x 79¾"		

\* Height does not include 5" for castor height or 6" for optional legs (¾" castor height for T-19, T-19G)

† Depth does not include 1½" for door handle (glass door models only)

T-12 available with optional 2½" diameter castors, legs not available

Leg levelers standard for T-12 and T-12G

Note: T-12 and T-12G height does not include 1" for door hinge

#### T SERIES FREEZERS

Model	Doors	Cu. Ft.	# of Shelves	HP	Amps	Crated Wt.	L	D†	H*
<b>-10°F SOLID DOORS</b>									
T-12F	1	12	3	¼	2.6	205	24¾" x 23¾" x 63¾"		
T-19F	1	19	3	½	6.8	285	27" x 24½" x 75¼"		
T-23F	1	23	3	½	10.4	295	27" x 29½" x 78¾"		
T-35F	2	35	6	¾	12.4	450	39½" x 29½" x 78¾"		
T-49F	2	49	6	¾	13.2	510	54¾" x 29½" x 78¾"		
T-72F‡	3	72	9	1	8.8	665	78¾" x 29½" x 79¾"		
<b>-10°F GLASS DOORS</b>									
T-12FG	1	12	3	½	9.0	290	24¾" x 23¾" x 62¾"		
T-23FG	1	23	3	¾	13.0	405	27" x 29¼" x 78¾"		
T-49FG‡	2	49	6	1½	12.3	600	54¾" x 29¼" x 78¾"		
T-72FG‡	3	72	9	1½	14.1	825	78¾" x 29¼" x 79¾"		
<b>-10°F SOLID HALF-DOORS</b>									
T-23F-2	2 s/s	23	3	½	10.4	300	27" x 29½" x 78¾"		
T-49F-4	4 s/s	49	6	¾	13.2	530	54¾" x 29½" x 78¾"		
<b>0°F SOLID DOOR</b>									
T-19FZ	1	19	3	½	6.8	245	27" x 24½" x 75¼"		

\* Height does not include 5" for castor height or 6" for optional legs (¾" castor height for T-19F/FZ)

† Depth does not include 1½" for door handles (glass door models only)

‡ Requires 115/208-230/60 Hz, single phase, 3 pole, 4 wire circuit

T-12F and T-12FG available with 2½" castors, legs not available

Leg levelers standard for T-12F and T-12FG

Note: T-12 and T-12FG height does not include 1" for door hinge

## FEATURES/BENEFITS

- Adjustable, heavy duty PVC coated wire shelves
- Incandescent interior lighting (solid doors)  
Fluorescent interior lighting on glass doors
- Foamed-in-place polyurethane high density cell insulation (CFC Free)
- Positive seal self-closing doors with factory tested (over 1,000,000 times) lifetime guaranteed door hinges and torsion type closure system on swing door models
- Energy efficient, "Low-E", thermal glass on glass doors
- 4" diameter swivel castors standard equipment (DT Series). 6" legs standard equipment (TSD Series) Castors optional for TSD Series, 6" legs optional for DT Series
- Door locks standard on DT Series
- Lifetime guaranteed recessed door handles standard on solid doors
- Self-contained system
- Remote units available

## Slide Door Units Have...

- Oversized and balanced, environmentally friendly (134A), refrigeration system, factory sealed and pre-lubricated for long life - holds 33°F to 38°F
- Unique space saving slide door design for space tight kitchens - energy efficient
- 300 series stainless steel slide door system self-closes to preserve refrigeration and maximize floor space. Efficient counter balanced weight system for smooth, even, positive closure. No springs to wear out. Quiet, consistent closing year after year
- .040 anodized quality aluminum ends and all stainless steel front and doors (solid door models)
- Interior - attractive, NSF approved, white aluminum and 300 series stainless floor
- Exterior mounted temperature monitor
- Bottom mount compressor

## Dual Temperature Units Have...

- Oversized and balanced, refrigeration system, factory sealed and pre-lubricated for long life (134A refrigerator / R404A freezer)
- True's dual temperature models are equipped with two, self-contained, independent refrigeration systems (CFC free) in a bottom mount design
- Refrigerator holds 33°F to 38°F; freezer holds -10°F
- 300 series stainless steel front (the finest stainless available)
- Interior - attractive, NSF approved, white aluminum, covered corners and 300 series stainless steel floor
- Extruded, aluminum door frames on glass doors
- Anodized quality aluminum finished ends, back and top
- Door, exterior mounted, digital temperature monitors
- Compartmentalized interior lighting (one for each door)  
Incandescent for solid doors, fluorescent for glass doors
- T-23DT features the refrigerator on top and the freezer on the bottom
- T-49DT features the refrigerator on the left and the freezer on the right

- Freezer compartment features standard backguard to improve airflow (T-49DT's only)
- Automatic defrost system time-initiated, time-terminated in single section models; time-initiated, temperature terminated in two section models



T-49DT



T-23DT



TSD-33G



T-4DT-G



TSD-47



TSD-69

## SLIDE DOOR REFRIGERATORS TSD SERIES

Model	Doors	Cu. Ft.	# of Shelves	HP	Amps	Crated Wt.	L	D†	H*
<b>SOLID DOORS</b>									
TSD-33	2	33	6	½	9.2	370	39½" x 29¾" x 78¾"		
TSD-47	2	47	6	½	10.3	450	54½" x 29¾" x 78¾"		
TSD-69	3	69	9	½	12.0	630	78½" x 29¾" x 79½"		
<b>GLASS DOORS</b>									
TSD-33G	2	33	6	½	8.9	400	39½" x 29¾" x 78¾"		
TSD-47G	2	47	6	½	10.3	480	54½" x 29¾" x 78¾"		
TSD-69G	3	69	9	½	12.0	640	78½" x 29¾" x 79½"		

\* Height does not include 6" for leg height or 5" for optional castors

† Depth does not include ¾" for door handle

## DUAL TEMPERATURE - DT SERIES

Model	Doors	Cu. Ft.	# of Shelves	HP	Amps	Crated Wt.	L	D†	H*
<b>SOLID DOORS</b>									
T-23DT	2	11	8	3	½ ½	12.0	315	27" x 29½" x 78¾"	
T-49DT	2	23	23	6	½ ½	16.0	510	54½" x 29½" x 78¾"	
<b>GLASS DOORS</b>									
T-23DT-G	2	11	8	3	½ ½	15.6	360	27" x 29¼" x 78¾"	
T-49DT-G‡	2	23	23	6	½ ¾	14.2	630	54½" x 29¼" x 78¾"	
<b>SOLID HALF-DOORS</b>									
T-49DT-4	4	23	23	6	½ ½	16.0	515	54½" x 29½" x 78¾"	

\* Height does not include 5" for castor height or 6" for optional legs

† Depth does not include ¾" for door handle (solid or glass door)

‡ Requires 115/208-230/60 Hz, single phase, 3 pole, 4 wire circuit

## Specialty Reach-Ins

### Features / Benefits

- 300 series stainless steel doors and front, the finest stainless available (excludes glass door models)
- .040 anodized quality aluminum ends
- Extruded, aluminum door frames on glass doors
- Incandescent interior lighting (fluorescent on glass door model)
- Foamed-in-place polyurethane high density cell insulation (CFC Free)
- Positive seal self-closing doors with factory tested (over 1,000,000 times) lifetime guaranteed door hinges and torsion type closure system
- Energy efficient, "Low-E", thermal glass on glass doors
- 4" diameter swivel castors standard equipment, 6" legs available
- Lifetime guaranteed recessed door handles standard on solid doors
- Self-contained system
- Door locks standard

### Heated Cabinet Units Have...

- Powerfully provides holding temperatures of 80°F to 180°F throughout the cabinet for uniform, forced-air, heating
- Adjustable, heavy duty chrome plated shelves
- Heater - sheathed for corrosion resistance
- Exterior mounted, color coded, temperature monitor
- 12" x 20" pan standard for contents requiring high humidity
- Adjustable dial control is a standard feature for low humidity application (turn counterclockwise to ventilate)
- Bun tray rack (optional) - Solid door heated cabinet interior accommodates this option (glass door model does not accommodate this option)

### Refrigeration Units Have...

- Oversized and balanced, environmentally friendly, refrigeration system, factory sealed and pre-lubricated for long life
- Refrigerators hold 33°F to 38°F; environmentally friendly (134A), refrigerant
- Interior - attractive, NSF approved, white aluminum sides and top, 300 series stainless steel floor with coved corners
- Adjustable, heavy duty, PVC coated wire shelves (three shelves per section standard)
- Digital exterior mounted temperature monitor
- Refrigerator models feature glass condensate pan
- Remote units available

### Freezer Units Have...

- Freezer holds -10°F (air off evaporator coil, -20°F) holds frozen food and ice cream
- Defrost system time-initiated, temperature-terminated
- Environmentally friendly (R404A), refrigerant
- Automatic evaporator fan motor delay during defrost cycle
- Minimum wattage heater in cabinet frame and door
- Standard backguard improves airflow
- Remote units available



TM-52G



TM-74-6



TH-23



TM-23G



TM-24F

### HEATED CABINETS - TH SERIES

Model	Doors	Cu. Ft.	# of Shelves	HP	Amps	Crated Wt.	L	D†	H*
<b>SOLID DOOR</b>									
TH-23	1	23	3	850	7.8	240	27"	29 1/2"	78 3/8"
<b>GLASS DOOR</b>									
TH-23G	1	23	3	850	7.8	270	27"	29 3/4"	78 3/8"

\* Height does not include 5" for castor height or 6" for optional legs

\* Height does not include 1" for ventilator cap

† Depth does not include 1 1/2" for door handle (glass door model only)

### TOP MOUNT REFRIGERATORS - TM SERIES

Model	Doors	Cu. Ft.	# of Shelves	HP	Amps	Crated Wt.	L	D	H*
<b>SOLID DOORS</b>									
TM-24	1	24	3	1/3	8.5	265	27"	29 1/2"	78 1/4"
TM-52	2	52	6	1/2	10.0	455	54 1/8"	29 1/2"	78 1/4"
TM-74	3	74	9	1/2	10.5	610	78 1/8"	29 1/2"	78 1/4"
<b>GLASS DOORS</b>									
TM-24G	1	24	3	1/3	8.4	354	27"	29 3/4"	78 1/4"
TM-52G	2	52	6	1/2	10.0	512	54 1/8"	29 3/4"	78 1/4"
TM-74G	3	74	9	1/2	10.5	683	78 1/8"	29 3/4"	78 1/4"
<b>SOLID HALF DOORS</b>									
TM-24-2	2	24	3	1/3	8.5	275	27"	29 1/2"	78 1/4"
TM-52-4	4	52	6	1/2	10.0	450	54 1/8"	29 1/2"	78 1/4"
TM-74-6	6	74	9	1/2	10.5	631	78 1/8"	29 1/2"	78 1/4"

### TOP MOUNT FREEZERS - TM SERIES

TM-24F	1	24	3	1/2	9.6	305	27"	29 1/2"	78 1/4"
TM-52F†	2	52	6	3/4	13	525	54 1/8"	29 1/2"	78 1/4"

\* Height does not include 5" for castor height or 6" for optional legs

† Freezer depth does not include 1 1/2" for upper rear condensate enclosure

Note: Glass door models depth does not include 1 1/2" for door handle

## 300 Series Stainless TS Series Reach-Ins

### Features / Benefits

- True's "TS" series is the choice for the exclusive 300 series stainless steel commercial application. Designed with enduring quality that protects your long-term investment, and oversized refrigeration that guarantees superior food preservation
- 300 series stainless steel interior and exterior front and sides, with matching aluminum back
- Energy efficient, "Low-E", thermal glass on glass door models
- Solar, digital thermometer standard for easy visibility
- Incandescent interior lighting on solid door models
- Fluorescent interior lighting; Integrated door light (IDL) standard on glass & combination door models
- Adjustable, heavy duty, PVC coated wire shelves
- Positive seal self-closing doors with factory tested (over 1,000,000 times) lifetime guaranteed door hinges and torsion type closure system
- Lifetime guaranteed recessed door handles on solid doors
- Extruded, aluminum door frames on glass doors
- Foamed-in-place polyurethane high density cell insulation (CFC Free)
- Door locks standard
- 4" diameter swivel castors standard equipment, 6" legs available
- Bottom mount compressor
- Self-contained system
- Remote units available



### Refrigeration Units Have...

- Oversized and balanced, environmentally friendly (134A), refrigeration system, factory sealed and pre-lubricated for long life - holds 33°F to 38°F

### Full Door Units Have...

- TS-23/-F, -49/-F, -72/-F available with alternative hinge orientations (no charge)

### Half-Door Units Have...

- Alternative hinge orientations available (contact factory)

### Freezer Units Have...

- Oversized and balanced refrigeration system, factory sealed and pre-lubricated for long life. Environmentally friendly (R404A), refrigerant. -10°F temperature (air off evaporator coil, -20°F) - holds frozen food and ice cream
- Standard backguard improves airflow
- Defrost system time-initiated, temperature-terminated
- Automatic evaporator fan motor delay during defrost cycle
- Minimum wattage heater in cabinet frame and door

### Deep Reach-In Units Have...

- The utility of the "TS" series pass-thru is in its ability to be a server station for cold dishes. Designed to become a central station, rear-loaded from the kitchen prep area to be front-accessed by servers
- Shelving - (3) chrome shelves per section at no charge (includes four knob style shelf supports per shelf (shipped separately). (4) alternative interior options available (consult factory)
- Pilasters and tray slides - are to be field installed for TS series deep reach-ins. (pilasters and tray slides ship separate)

### Bottom Mounted Units Have...

- A "no-stoop", lower shelf
- Allows for top storage
- Compressor performs in the coolest, most grease-free area of kitchen for ease of compressor load
- Compressor can be serviced easily, and accessed by a single repairman



### 300 SERIES STAINLESS STEEL REFRIGERATORS

Model	Doors	Cu. Ft.	# of Shelves	HP	Amps	Crated Wt.	L	D†	H*
<b>SOLID DOORS</b>									
TS-23	1 s/s	23	3	1/3	7.6	295	27" x 29 1/2" x 78 3/8"		
TS-35	2 s/s	35	6	1/3	7.3	395	39 1/2" x 29 1/2" x 78 3/8"		
TS-49	2 s/s	49	6	1/2	9.1	465	54 1/8" x 29 1/2" x 78 3/8"		
TS-72	3 s/s	72	9	1/2	11.8	635	78 1/8" x 29 1/2" x 79 1/8"		
<b>GLASS DOORS</b>									
TS-23G	1 g/s	23	3	1/3	7.9	305	27" x 29 3/4" x 78 3/8"		
TS-49G	2 g/s	49	6	1/2	9.1	490	54 1/8" x 29 3/4" x 78 3/8"		
TS-72G	3 g/s	72	9	1/2	12.9	675	78 1/8" x 29 3/4" x 79 1/8"		
<b>SOLID HALF DOORS</b>									
TS-23-2	2 s/s	23	3	1/3	7.5	300	27" x 29 1/2" x 78 3/8"		
TS-49-4	4 s/s	49	6	1/2	9.5	470	54 1/8" x 29 1/2" x 78 3/8"		
TS-72-6	6 s/s	72	9	1/2	11.8	621	78 1/8" x 29 1/2" x 79 1/8"		
<b>GLASS HALF DOORS</b>									
TS-23G-2	2 g/s	23	3	1/3	7.9	296	27" x 29 3/4" x 78 3/8"		
TS-49G-4	4 g/s	49	6	1/2	9.1	515	54 1/8" x 29 3/4" x 78 3/8"		
TS-72G-6	6 g/s	72	9	1/2	12.9	745	78 1/8" x 29 3/4" x 79 1/8"		
<b>COMBINATION HALF DOORS</b>									
TS-23-1-G-1	1 g/s-1 s/s	23	3	1/3	8.0	290	27" x 29 3/4" x 78 3/8"		
TS-49-2-G-2	2 g/s-2 s/s	49	6	1/2	9.1	500	54 1/8" x 29 3/4" x 78 3/8"		
TS-72-3-G-3	3 g/s-3 s/s	72	9	1/2	12.9	648	78 1/8" x 29 3/4" x 79 1/8"		

### 300 SERIES STAINLESS STEEL FREEZERS

Model	Doors	Cu. Ft.	# of Shelves	HP	Amps	Crated Wt.	L	D†	H*
<b>SOLID DOORS</b>									
TS-23F	1 s/s	23	3	1/2	10.4	315	27" x 29 1/2" x 78 3/8"		
TS-35F	2 s/s	35	6	3/4	12.4	480	39 1/2" x 29 1/2" x 78 3/8"		
TS-49F	2 s/s	49	6	3/4	13.2	550	54 1/8" x 29 1/2" x 78 3/8"		
TS-72F‡	3 s/s	72	9	1	8.8	710	78 1/8" x 29 1/2" x 79 1/8"		
<b>GLASS FULL DOORS</b>									
TS-23FG	1 g/s	23	3	3/4	13.0	430	27" x 29 3/4" x 78 3/8"		
TS-49FG‡	2 g/s	49	6	1 1/2	12.3	605	54 1/8" x 29 3/4" x 78 3/8"		
TS-72FG‡	3 g/s	72	9	1 1/2	14.1	870	78 1/8" x 29 3/4" x 79 1/8"		
<b>SOLID HALF DOORS</b>									
TS-23F-2	2 s/s	23	3	1/2	10.4	330	27" x 29 1/2" x 78 3/8"		
TS-49F-4	4 s/s	49	6	3/4	13.2	560	54 1/8" x 29 1/2" x 78 3/8"		

\* Height does not include 5" for castor height or 6" for optional legs

† Depth does not include 1 3/8" for door handle (glass door models only)

‡ Requires 115/208-230/60 Hz, single phase, 3 pole, 4 wire circuit

### 300 SERIES STAINLESS STEEL DEEP REACH-IN/PASS-THRU REFRIGERATORS

Model	Doors	Cu. Ft.	# of Shelves	HP	Amps	Crated Wt.	L	D†	H*
<b>SOLID DOOR REACH-IN'S</b>									
TS-28	N/A-1frt	28	3	1/3	7.5	350	29" x 32 1/2" x 78 3/8"		
TS-53	N/A-2frt	53	6	1/2	11.8	525	51 1/4" x 32 1/2" x 78 3/8"		
<b>SOLID HALF DOOR REACH-IN'S</b>									
TS-28-2	N/A-2frt	28	3	1/3	7.5	320	29" x 32 1/2" x 78 3/8"		
TS-53-4	N/A-4frt	53	6	1/2	11.8	445	51 1/4" x 32 1/2" x 78 3/8"		
<b>SOLID DOOR PASS THRU'S</b>									
TS-28-PT	N/A-1frt/1bk	28	3	1/2	9.6	390	29" x 35 1/8" x 78 3/8"		
TS-53-PT	N/A-2frt/2bk	53	6	1/2	11.8	545	51 1/4" x 35 1/8" x 78 3/8"		
<b>SOLID HALF DOOR PASS THRU'S</b>									
TS-28-2-PT	N/A-2frt/1bk	28	3	1/2	9.6	415	29" x 35 1/8" x 78 3/8"		
TS-53-4-PT	N/A-4frt/2bk	53	6	1/2	11.8	575	51 1/4" x 35 1/8" x 78 3/8"		
<b>FULL GLASS (FRONT DOORS), PASS THRU'S</b>									
TS-28G-PT	1frt-1bk	28	3	1/2	9.6	425	29" x 35 1/4" x 78 3/8"		
TS-53G-PT	2frt-2bk	53	6	1/2	11.8	620	51 1/4" x 35 1/4" x 78 3/8"		
<b>HALF GLASS (FRONT DOORS), PASS THRU'S</b>									
TS-28-2-G-2-PT	2frt-2bk	28	3	1/2	9.6	430	29" x 35 1/4" x 78 3/8"		
TS-53-4-G-4-PT	4frt-4bk	53	6	1/2	11.8	610	51 1/4" x 35 1/4" x 78 3/8"		

\* Height does not include 5" for castor height or 6" for optional legs

† Depth does not include 1 3/8" for door handle (glass doors only)

## Reach-Ins

### TR Series Reach-Ins

#### Features / Benefits

- Shelving - (1) interior kit option included per full section at no charge. (4) different interior kits available
- Pilasters and tray slides/shelving are factory installed at no charge
- Exterior - 300 series stainless steel front, sides, bottom and back (the finest stainless available)
- Interior - 300 series stainless steel walls, back, floor & door liner
- Foamed-in-place polyurethane high density cell insulation (CFC free)
- Lifetime guaranteed recessed door handles
- Energy efficient, "Low-E", thermal glass on glass door models
- Exterior mounted digital electronic thermometer, Refrigeration units feature manual defogger
- Positive seal self-closing doors with 90° stay open feature. Lifetime guaranteed door hinges
- Extruded, aluminum door frames on glass doors
- Incandescent interior lighting (solid door); Fluorescent interior lighting (glass door)
- Door locks standard
- 4" diameter swivel castors standard equipment, 6" legs available
- Top mounted unit positioned out of food zone to maximize storage capacity
- Refrigerator models feature glass condensate pan to prevent electrolysis
- Self-contained system
- Remote and Curb mountable units available

#### Refrigeration Units Have...

- Oversized and balanced, environmentally friendly (134A), refrigeration system, factory sealed and pre-lubricated for long life - holds 33°F to 38°F
- Hot gas condensate for energy efficiency



TR2R-2HG/2HS



TR1F-2HS



TR1DT-2HS

#### Freezer Units Have...

- Environmentally friendly (R404A), refrigerant
- Freezer holds -10°F (air off evaporator coil, -20°F) for the best in food preservation.
- Defrost system time-initiated, temperature-terminated
- Automatic evaporator fan motor delay during defrost cycle
- Minimum wattage heater in cabinet frame and door
- Standard backguard improves airflow (excludes Pass-Thru model)
- Pass-thru freezer designed to be rear-loaded from prep area and front accessed

#### Heated Units Have...

- Powerfully provides holding temperatures of 80°F to 180°F throughout the cabinet for uniform, forced-air, heating
- Heater - stainless steel for corrosion resistance
- Humidity control - 12" x 20" pan standard
- Manual humidity control is a standard feature (turn counterclockwise to ventilate)
- Pass-thru heated cabinet designed to be rear-loaded from prep area and front accessed

#### Dual Temperature Units Have...

- Equipped with two, self-contained, independent refrigeration systems (CFC free)
- Left side refrigerator holds 33°F to 38°F. Right side freezer holds -10°F
- Compartmentalized, incandescent, interior lighting (one for each door)
- Automatic defrost system time-initiated, time-terminated in single section models; time-initiated, temperature-terminated in two section models
- Automatic evaporator fan motor delay during defrost cycle
- Minimum wattage heater in cabinet frame and door
- Dual exterior mounted temperature monitors
- Freezer compartment standard with backguard to improve airflow



### REACH-IN REFRIGERATORS - TR SERIES

Model	Doors	Cu. Ft.	HP	Amps	Crated Wt.	L	D†	H*
<b>SOLID DOORS</b>								
TR1R-1S	1	31	1/3	8.5	370	29"	34 3/4"	78 1/4"
TR2R-2S	2	56	1/2	10.0	650	51 3/8"	34 3/4"	78 1/4"
TR3R-3S	3	85	1/2	11.8	770	76 1/2"	34 3/4"	78 1/4"
<b>GLASS DOORS</b>								
TR1R-1G	1	31	1/3	9.0	410	29"	34 7/8"	78 1/4"
TR2R-2G	2	56	1/2	11.4	710	51 3/8"	34 7/8"	78 1/4"
TR3R-3G	3	85	3/4	13.6	867	76 1/2"	34 7/8"	78 1/4"
<b>SOLID HALF DOORS</b>								
TR1R-2HS	2	31	1/3	8.5	390	29"	34 3/4"	78 1/4"
TR2R-4HS	4	56	1/2	10.0	650	51 3/8"	34 3/4"	78 1/4"
TR3R-6HS	6	85	1/2	11.8	770	76 1/2"	34 3/4"	78 1/4"
<b>GLASS HALF DOORS</b>								
TR1R-2HG	2	31	1/3	9.0	465	29"	34 7/8"	78 1/4"
TR2R-4HG	4	56	1/2	11.4	660	51 3/8"	34 7/8"	78 1/4"
<b>COMBINATION HALF DOORS</b>								
TR1R-1HG/1HS	2	31	1/3	9.0	465	29"	34 7/8"	78 1/4"
TR2R-2HG/2HS	4	56	1/2	10.0	640	51 3/8"	34 7/8"	78 1/4"

### REACH-IN FREEZERS - TR SERIES

<b>SOLID DOORS</b>								
TR1F-1S	1	31	1/2	10.8	410	29"	34 3/4"	78 1/4"
TR2F-2S	2	56	3/4	13.0	704	51 3/8"	34 3/4"	78 1/4"
TR3F-3S‡	3	85	1 1/2	11.8	790	76 1/2"	34 3/4"	78 1/4"
<b>GLASS DOORS</b>								
TR1F-1G	1	31	3/4	10.2	435	29"	34 7/8"	78 1/4"
TR2F-2G‡	2	56	1	9.1	725	51 3/8"	34 7/8"	78 1/4"
<b>HALF DOORS</b>								
TR1F-2HS	2	31	1/2	10.8	410	29"	34 3/4"	78 1/4"
TR2F-4HS	4	56	3/4	13.0	704	51 3/8"	34 3/4"	78 1/4"
TR3F-6HS‡	6	85	1 1/2	11.8	790	76 1/2"	34 3/4"	78 1/4"
<b>PASS-THRU SOLID DOORS</b>								
TR2FPT-2S-2S‡	4	56	1	9.1	754	51 3/8"	37 1/4"	78 1/4"

### REACH-IN HEATED CABINETS - TR SERIES

<b>SOLID DOORS</b>								
					<b>Watts</b>			
TR1H-1S‡‡	1	31	2000	N/A	350	29"	34 3/4"	78 1/4"
TR2H-2S‡‡	2	56	4000	N/A	565	51 3/8"	34 3/4"	78 1/4"

### REACH-IN DUAL TEMPERATURE - TR SERIES

Model	Doors	Cu. Ft.	HP	Amps	Crated Wt.	L	D†	H*
<b>SOLID DOORS</b>								
			<b>Reg - Frzr</b>					
TR1DT-2HS	2	13 - 13	1/5 - 1/3	13.2	480	29"	34 3/4"	78 1/4"
TR2DT-2S‡	2	26 - 24	1/3 - 1/2	12.2	725	51 3/8"	34 3/4"	78 1/4"

\* Height does not include 5" for castor height or 6" for optional legs and 1" for system mechanical components (not on TR1DT-2HS)

† Depth does not include 1 1/8" for door handle (glass door models only). Depth does not include 1 1/8" for upper rear condensate enclosure on DT models

‡ Requires 115/208-230/60 Hz, single phase, 3 pole, 4 wire circuit

‡‡ Requires 115/208-240/60 Hz, single phase, 3 pole, 4 wire circuit

## TR Series Pass-Thrus

### Features / Benefits

- Shelving - (1) interior kit option included per full section at no charge. (4) different interior kits available
- Pilasters and tray slides /shelving are factory installed at no charge
- Exterior - 300 series stainless steel front, sides, bottom and back (the finest stainless available)
- Interior - 300 series stainless steel walls, back, floor & door liner (solid doors)
- Foamed-in-place polyurethane high density cell insulation (CFC free)
- Lifetime guaranteed recessed door handles standard
- Positive seal self-closing doors with 90 degree stay open feature. Lifetime guaranteed door hinges
- Incandescent interior lighting (solid doors); Fluorescent interior lighting (glass and combination doors)
- Door locks standard
- Extruded, aluminum door frames on glass doors
- 4" diameter swivel castors standard equipment, 6" legs available, (Heated cabinets standard with legs, Optional castors available on single section cabinets only)
- Top mounted unit positioned out of food zone to maximize storage capacity
- Refrigerator models feature glass condensate pan to prevent electrolysis
- Self-contained system
- Curb mountable units available

### Refrigeration Units Have...

- Oversized and balanced, environmentally friendly (134A), refrigeration system, factory sealed and pre-lubricated for long life - holds 33°F to 38°F
- The utility of the "TR" series pass-thru is in its ability to be a server station for cold dishes. Designed to become a central station, rear-loaded from the kitchen prep area to be front-accessed by servers
- Hot gas condensate for energy efficiency
- Exterior mounted digital electronic thermometer features manual defogger
- Remote and curb mountable units available

### Heated Units Have...

- Powerfully provides holding temperatures of 80°F to 180°F throughout the cabinet for uniform, forced-air, heating
- Heater - stainless steel for corrosion resistance
- Exterior mounted, color coded, temperature monitor
- Humidity control - 12" x 20" pan standard
- Manual humidity control is a standard feature (turn counterclockwise to ventilate)
- Pass-thru heated cabinet designed to be rear-loaded from prep area and front accessed



TR2RPT-4HG-2S



TR1RPT-1S-1S

### PASS-THRU REFRIGERATORS - TR SERIES

Model	Doors	Cu. Ft.	HP	Amps	Crated Wt.	L	D†	H*
<b>SOLID FRONT/SOLID REAR DOORS</b>								
TR1RPT-1S-1S	2	31	1/2	10.4	370	29"	37 1/4"	78 1/4"
TR2RPT-2S-2S	4	56	3/4	15.5	710	51 3/8"	37 1/4"	78 1/4"
<b>SOLID FRONT HALF DOORS/SOLID REAR DOORS</b>								
TR1RPT-2HS-1S	3	31	1/2	10.4	535	29"	37 1/4"	78 1/4"
TR2RPT-4HS-2S	6	56	3/4	15.5	contact factory	51 3/8"	37 1/4"	78 1/4"
<b>GLASS FRONT/SOLID REAR DOORS</b>								
TR1RPT-1G-1S	2	31	1/2	10.4	525	29"	37 1/2"	78 1/4"
TR2RPT-2G-2S	4	56	3/4	15.5	contact factory	51 3/8"	37 1/2"	78 1/4"
<b>GLASS FRONT HALF DOORS/SOLID REAR DOORS</b>								
TR1RPT-2HG-1S	3	31	1/2	10.4	contact factory	29"	37 1/2"	78 1/4"
TR2RPT-4HG-2S	6	56	3/4	15.5	contact factory	51 3/8"	37 1/2"	78 1/4"
<b>COMBO FRONT HALF DOORS/SOLID REAR DOORS</b>								
TR1RPT-1HG/1HS-1S	3	31	1/2	10.4	contact factory	29"	37 1/2"	78 1/4"
TR2RPT-2HG/2HS-2S	6	56	3/4	15.5	contact factory	51 3/8"	37 1/2"	78 1/4"
<b>SOLID FRONT/GLASS REAR DOORS</b>								
TR1RPT-1S-1G	2	31	1/2	10.4	525	29"	37 1/2"	78 1/4"
TR2RPT-2S-2G	4	56	3/4	15.5	contact factory	51 3/8"	37 1/2"	78 1/4"
<b>SOLID FRONT HALF DOORS/GLASS REAR DOORS</b>								
TR1RPT-2HS-1G	3	31	1/2	10.4	contact factory	29"	37 1/2"	78 1/4"
TR2RPT-4HS-2G	6	56	3/4	15.5	contact factory	51 3/8"	37 1/2"	78 1/4"
<b>GLASS FRONT/GLASS REAR DOORS</b>								
TR1RPT-1G-1G	2	31	1/2	10.4	440	29"	37 5/8"	78 1/4"
TR2RPT-2G-2G	4	56	3/4	15.5	740	51 3/8"	37 5/8"	78 1/4"
<b>GLASS FRONT HALF DOORS/GLASS REAR DOORS</b>								
TR1RPT-2HG-1G	3	31	1/2	10.4	contact factory	29"	37 5/8"	78 1/4"
TR2RPT-4HG-2G	6	56	3/4	15.5	contact factory	51 3/8"	37 5/8"	78 1/4"
<b>COMBO FRONT HALF DOOR/GLASS REAR DOORS</b>								
TR1RPT-1HG/1HS-1G	3	31	1/2	10.4	contact factory	29"	37 5/8"	78 1/4"
TR2RPT-2HG/2HS-2G	6	56	3/4	15.5	contact factory	51 3/8"	37 5/8"	78 1/4"

\* Height does not include 5" for castor height or 6" for optional legs or 1" for system mechanical components

† Depth does not include 1 5/8" for door handles (glass door models only)

Models with glass front & rear doors will be 2 3/4"

### PASS-THRU HEATED CABINET - TR SERIES

Model	Doors	Cu. Ft.	Watt	Crated Wt.	L	D	H*
<b>SOLID DOORS</b>							
TR1HPT-1S-1S‡	2	31	2000	400	29"	37 1/4"	78 1/4"
TR2HPT-2S-2S‡	4	56	4000	600	51 3/8"	37 1/4"	78 1/4"

\* Height does not include 6" for legs or 5" for optional castors (castors available on single section models only) and 1" for system mechanical components

‡ Requires 115/208-240/60 Hz, single phase, 3 pole, 4 wire circuit

Note: TR2HPT-2S-2S requires hard wiring

## Roll-Ins/Roll Thrus

### TR Series Roll-Ins & Roll-Thrus

#### Features / Benefits

- Accepts roll-in rack (inboard castor) with maximum dimensions of 27" w. x 29" d. x 66" h. 89" high models accept roll-in/thru rack (inboard castor) with maximum dimensions of 27" w. x 29" d. x 72" h. (supplied by others)
- Exterior - 300 series stainless steel front, bottom and back, stainless steel sides
- Interior - 300 series stainless steel walls, back, floor & door liner
- Heavy gauge doors.
- Three rugged cam-lift hinges per door- lifetime guaranteed. Designed for easy product access with a full 180° open capability and stay open feature at 120°
- Heavy gauge stainless steel ramp standard for each door
- Interior bumpers protect cabinet
- Foamed-in-place polyurethane high density cell insulation (CFC Free)
- Incandescent interior lighting
- Lifetime guaranteed recessed door handles
- Top mounted unit positioned out of food zone to maximize storage capacity
- Self-contained system
- Reversible wiper gaskets for positive seal
- Field reversible door swing

#### Refrigeration Units Have...

- Oversized and balanced, environmentally friendly (134A), refrigeration system, factory sealed and pre-lubricated for long life - holds 33°F to 38°F
- Glass condensate pan to prevent electrolysis
- Hot gas condensate for energy efficiency

- Exterior mounted digital electronic thermometer features manual defogger
- Energy saver switch
- Remote units available

#### Freezer Unit Has...

- Oversized and balanced, environmentally friendly, refrigeration system, factory sealed and pre-lubricated for long life - holds -10°F (air off evaporator coil, -20°F) for the best in food preservation
- An ideal -10°F for roll-in racks supporting frozen food and ice cream
- Automatic defrost system time-initiated, temperature-terminated
- Exterior mounted digital electronic thermometer features manual defogger
- Automatic evaporator fan motor delay during defrost cycle
- Minimum wattage heater in cabinet frame
- Energy saver switch
- Remote units available

#### Heated Units Have...

- Powerfully provides holding temperatures of 80°F to 180°F throughout the cabinet for uniform, forced-air, heating
- Heater - stainless steel for corrosion resistance
- Humidity control - 12" x 20" pan standard
- Manual humidity control is a standard feature (turn counterclockwise to ventilate).
- Exterior mounted, color coded, temperature monitor
- Roll-thru heated cabinet designed to be rear-loaded from prep area and front accessed



TR1RRT-1S-1S



TR1FRI-1S



TR2RRI-2S



#### ROLL-IN REFRIGERATORS - TR SERIES

Model	Doors	Cu. Ft.	HP	Amps	Crated Wt.	L	D	H*
TR1RRI-1S	1	37	1/3	8.9	400	35" x 34 1/2"	83 3/4"	
TR2RRI-2S	2	75	1/2	11.8	706	68" x 34 1/2"	83 3/4"	
<b>89" HIGH</b>								
TR1RRI89-1S	1	38	1/3	8.9	485	35" x 34 1/2"	89"	
TR2RRI89-2S	2	80	1/2	11.8	786	68" x 34 1/2"	89"	

#### ROLL-IN FREEZER - TR SERIES

TR1FRI-1S	1	37	3/4	12.2	485	35" x 34 1/2"	83 3/4"	
-----------	---	----	-----	------	-----	---------------	---------	--

#### ROLL-THRU REFRIGERATORS - TR SERIES

TR1RRT-1S-1S	2	37	1/3	8.9	475	35" x 36 7/8"	83 3/4"	
TR2RRT-2S-2S	4	75	1/2	9.5	781	68" x 36 7/8"	83 3/4"	
<b>89" HIGH</b>								
TR1RRT89-1S-1S	2	38	1/3	8.9	495	35" x 36 7/8"	89"	
TR2RRT89-2S-2S	4	80	1/2	9.5	821	68" x 36 7/8"	89"	

#### ROLL-IN HEATED CABINETS - TR SERIES

Model	Doors	Cu. Ft.	Watts	Crated Wt.	L	D	H
TR1HRI-1S ‡	1	37	2000	325	35" x 34 1/2"	83 3/4"	
TR2HRI-2S ‡	2	75	4000	615	68" x 34 1/2"	83 3/4"	
<b>89" HIGH</b>							
TR1HRI89-1S ‡	1	38	2000	385	35" x 34 1/2"	89"	

#### ROLL-THRU HEATED CABINETS - TR SERIES

TR1HRT-1S-1S ‡	2	37	2000	400	35" x 36 7/8"	83 3/4"	
TR2HRT-2S-2S ‡	4	75	4000	706	68" x 36 7/8"	83 3/4"	
<b>89" HIGH</b>							
TR1HRT89-1S-1S ‡	2	38	2000	500	35" x 36 7/8"	89"	

\* Height does not include 1" for system mechanical components  
 ‡ Requires 115/208-240/60 Hz, single phase, 3 pole, 4 wire circuit  
 Note: TR2HRI-2S, TR2HRT-2S-2S require hard wiring

## TA Series Reach-Ins

### Features / Benefits

- Shelving - (3) heavy duty, PVC coated wire shelves per section (shipped separately) (4) different interior kits available
- Exterior - 300 series stainless steel front, sides, bottom and back (the finest stainless available)
- Interior - attractive, NSF approved, white aluminum sides and back. 300 series stainless floor and door liner
- Foamed-in-place polyurethane high density cell insulation (CFC free)
- Lifetime guaranteed recessed door handles
- Extruded, aluminum door frames on glass doors
- Exterior mounted digital electronic thermometer features manual defogger
- Positive seal self-closing doors with 90 degree stay open feature. Lifetime guaranteed door hinges
- Incandescent interior lighting (solid doors); Fluorescent interior lighting (glass door)
- Energy efficient, "Low-E", thermal glass on glass door models
- Door locks standard

- 4" diameter swivel castors standard equipment, 6" legs available
- Top mounted unit positioned out of food zone to maximize storage capacity
- Refrigerator models feature glass condensate pan to prevent electrolysis
- Self-contained system
- Remote units available
- Curb mountable units available

### Refrigeration Units Have...

- Oversized and balanced, environmentally friendly refrigeration system, factory sealed and pre-lubricated for long life - hold 33°F to 38°F
- Hot gas condensate for energy efficiency

### Freezer Units Have...

- Environmentally friendly (R404A), refrigerant
- Freezer holds -10°F (air off evaporator coil, -20°F) for the best in food preservation
- Automatic defrost system time-initiated, temperature-terminated

- Pass-thru freezer designed to be rear-loaded from prep area and front accessed

### Dual Temperature Units Have...

- True's dual temperature models are equipped with two, self-contained, independent refrigeration systems (CFC free)
- TA1DT-2HS has refrigerator on top and freezer on bottom, TA2DT-2S has refrigerator on left and freezer on right; refrigerator holds 33°F to 38°F, freezer holds -10°F
- Compartmentalized, incandescent, interior lighting (one for each door)
- Automatic defrost system time-initiated, time-terminated in single section models; time-initiated, temperature-terminated in two section models
- Automatic evaporator fan motor delay during defrost cycle
- Minimum wattage heater in cabinet frame and door
- Dual exterior mounted temperature monitors
- Freezer compartment standard with backguard to improve airflow

### Heated Units Have...

- Powerfully provides holding temperatures of 80°F to 180°F throughout the cabinet for uniform, forced-air, heating
- Heater - stainless steel for corrosion resistance
- Humidity control - 12" x 20" pan standard
- Manual humidity control is a standard feature (turn counterclockwise to ventilate)
- Pass-thru heated cabinet designed to be rear-loaded from prep area and front accessed

REACH-IN REFRIGERATORS - TA SERIES									
Model	Doors	Cu. Ft.	HP	Amps	Crated Wt.	L	D†	H*	
<b>SOLID DOORS</b>									
TA1R-1S	1	31	1/3	8.5	370	29"	34 3/4"	78 1/4"	
TA2R-2S	2	56	1/2	10.0	650	51 3/8"	34 3/4"	78 1/4"	
TA3R-3S	3	85	1/2	11.8	770	76 1/2"	34 3/4"	78 1/4"	
<b>GLASS DOORS</b>									
TA1R-1G	1	31	1/3	9.0	410	29"	34 7/8"	78 1/4"	
TA2R-2G	2	56	1/2	11.4	710	51 3/8"	34 7/8"	78 1/4"	
TA3R-3G	3	85	3/4	13.6	867	76 1/2"	34 7/8"	78 1/4"	
<b>SOLID HALF DOORS</b>									
TA1R-2HS	2	31	1/3	8.5	390	29"	34 3/4"	78 1/4"	
TA2R-4HS	4	56	1/2	10.0	650	51 3/8"	34 3/4"	78 1/4"	
TA3R-6HS	6	85	1/2	11.8	770	76 1/2"	34 3/4"	78 1/4"	
<b>GLASS HALF DOORS</b>									
TA1R-2HG	2	31	1/3	9.0	465	29"	34 7/8"	78 1/4"	
TA2R-4HG	4	56	1/2	11.4	660	51 3/8"	34 7/8"	78 1/4"	
<b>COMBINATION HALF DOORS</b>									
TA1R-1HG/1HS	2	31	1/3	9.0	465	29"	34 7/8"	78 1/4"	
TA2R-2HG/2HS	4	56	1/2	10.0	640	51 3/8"	34 7/8"	78 1/4"	
<b>REACH-IN FREEZERS - TA SERIES</b>									
<b>SOLID DOOR</b>									
TA1F-1S	1	31	1/2	10.8	410	29"	34 3/4"	78 1/4"	
TA2F-2S	2	56	3/4	13.0	704	51 3/8"	34 3/4"	78 1/4"	
TA3F-3S‡	3	85	1 1/2	11.8	790	76 1/2"	34 3/4"	78 1/4"	
<b>GLASS DOORS</b>									
TA1F-1G	1	31	3/4	10.2	435	29"	34 7/8"	78 1/4"	
TA2F-2G‡	2	56	1	9.1	725	51 3/8"	34 7/8"	78 1/4"	
<b>HALF-DOOR SOLID DOORS</b>									
TA1F-2HS	2	31	1/2	10.8	410	29"	34 3/4"	78 1/4"	
TA2F-4HS	4	56	3/4	13.0	704	51 3/8"	34 3/4"	78 1/4"	
TA3F-6HS‡	6	85	1 1/2	11.8	790	76 1/2"	34 3/4"	78 1/4"	
<b>PASS-THRU SOLID DOORS</b>									
TA2FPT-2S-2S‡	4	56	1	9.1	754	51 3/8"	37 1/4"	78 1/4"	
<b>DEEP REACH-IN DUAL TEMPERATURE - TA SERIES</b>									
Model	Doors	Cu. Ft.	HP	Amps	Crated Wt.	L	D†	H*	
		Reg - Frzr							
<b>SOLID DOOR</b>									
TA1DT-2HS	2	13-13	1/5 - 1/3	13.2	480	29"	34 3/4"	78 1/4"	
TA2DT-2S‡	2	26-24	1/3 - 1/2	12.2	725	51 3/8"	34 3/4"	78 1/4"	
<b>REACH-IN HEATED CABINETS - TA SERIES</b>									
<b>SOLID DOORS</b>									
		Watts							
TR1H-1S‡‡	1	31	2000	N/A	350	29"	34 3/4"	78 1/4"	
TR2H-2S‡‡	2	56	4000	N/A	565	51 3/8"	34 3/4"	78 1/4"	

\* Height does not include 5" for castor height or 6" for optional legs and 1" for system mechanical components (not on TA1DT-2HS)  
 † Depth does not include 1 3/8" for door handle (glass door models only) and 2 3/8" for upper rear condensate enclosure on DT models  
 ‡ Requires 115/208-230/60 Hz, single phase, 3 pole, 4 wire circuit

- Automatic evaporator fan motor delay during defrost cycle
- Minimum wattage heater in cabinet frame and door
- Standard backguard improves airflow (excludes PT models)



TA2DT-2S



TA2R-2HG/2HS



TA3R-3S



TA1F-2HS

### TA Series Pass-Thrus, Roll-Ins & Roll-Thrus

#### Features / Benefits

- Oversized and balanced, environmentally friendly, refrigeration system, factory sealed and pre-lubricated for long life
- Exterior - 300 series stainless steel doors, front, bottom and back (the finest stainless available). Stainless steel sides
- Interior - attractive, NSF approved, white aluminum sides and back, 300 series stainless floor and door liner (solid doors)
- Exterior mounted digital electronic thermometer features manual defogger
- Foamed-in-place polyurethane high density cell insulation (CFC free)
- Lifetime guaranteed recessed door handles on solid door models
- Incandescent interior lighting (solid door). Fluorescent interior lighting (glass and combo doors)
- Top mounted unit positioned out of food zone to maximize storage capacity
- Self-contained system
- Remote units available

#### Pass-Thru Units Have...

- Shelving - (3) heavy duty, PVC wire shelves per section (shipped separately) (4) different interior kits available

- Food safe refrigerators hold 33°F to 38°F
- The utility of the "TA" series pass-thru is in its ability to be a server station for cold dishes. Designed to become a central station, rear-loaded from the kitchen prep area to be front-accessed by servers
- Door locks standard.
- Extruded, aluminum door frames on glass doors
- 4" diameter swivel castors standard equipment, 6" legs available
- Refrigerator models feature glass condensate pan to prevent electrolysis
- Positive seal self-closing doors with 120° stay open feature, Lifetime guaranteed door hinges

#### Roll-In & Roll-Thru Units Have...

- Accepts roll-in rack (inboard castor) with maximum dimensions of 27" w. x 29" d. x 66" h.. 89" high models accept roll-in/thru rack (inboard castor) with maximum dimensions of 27" w. x 29" d. x 72" h. (supplied by others)
- Heavy gauge doors
- Three rugged cam-lift hinges per door- lifetime guaranteed. Designed for easy product access with a full 180° open capability and stay open feature at 120°
- Heavy gauge stainless steel ramp standard for each door
- Interior bumpers protect cabinet
- Energy saver switch
- Glass condensate pan to prevent electrolysis
- Reversible wiper gaskets for positive seal
- Field reversible door swing

#### Refrigeration Units Have...

- Food safe refrigerators hold 33°F to 38°F
- Hot gas condensate for energy efficiency

#### Freezer Units Have....

- Freezer holds -10°F (air off evaporator coil, -20°F) for the best in food preservation
- An ideal -10°F for roll-in racks supporting frozen food and ice cream
- Automatic defrost system time-initiated, temperature-terminated
- Automatic evaporator fan motor delay during defrost cycle
- Minimum wattage heater in cabinet frame
- Standard backguard improves airflow

#### Heated Units Have...

- Powerfully provides holding temperatures of 80°F to 180°F throughout the cabinet for uniform, forced-air, heating
- Heater - stainless steel for corrosion resistance
- Humidity control - 12" x 20" pan standard
- Manual humidity control is a standard feature (turn counterclockwise to ventilate)
- Exterior mounted, color coded, temperature monitor
- Roll-thru heated cabinet designed to be rear-loaded from prep area and front accessed



#### PASS-THRU REFRIGERATORS - TA SERIES

Model	Doors	Cu. Ft.	HP	Amps	Crated Wt.	L	D†	H*
<b>SOLID FRONT/SOLID REAR DOORS</b>								
TA1RPT-1S-1S	2	31	1/2	10.4	370	29"	37 1/4"	78 1/4"
TA2RPT-2S-2S	4	56	3/4	15.5	710	51 3/8"	37 1/4"	78 1/4"
<b>SOLID FRONT HALF DOOR/SOLID REAR DOORS</b>								
TA1RPT-2HS-1S	3	31	1/2	10.4	535	29"	37 1/4"	78 1/4"
TA2RPT-4HS-2S	6	56	3/4	15.5	contact factory	51 3/8"	37 1/4"	78 1/4"
<b>GLASS FRONT/SOLID REAR DOORS</b>								
TA1RPT-1G-1S	2	31	1/2	10.4	contact factory	29"	37 1/2"	78 1/4"
TA2RPT-2G-2S	4	56	3/4	15.5	contact factory	51 3/8"	37 1/2"	78 1/4"
<b>GLASS FRONT HALF DOORS/SOLID REAR DOORS</b>								
TA1RPT-2HG-1S	3	31	1/2	10.4	contact factory	29"	37 1/2"	78 1/4"
TA2RPT-4HG-2S	6	56	3/4	15.5	contact factory	51 3/8"	37 1/2"	78 1/4"
<b>COMBO FRONT HALF DOORS/SOLID REAR DOORS</b>								
TA1RPT-1HG/1HS-1S	3	31	1/2	10.4	contact factory	29"	37 1/2"	78 1/4"
TA2RPT-2HG/2HS-2S	6	56	3/4	15.5	contact factory	51 3/8"	37 1/2"	78 1/4"
<b>SOLID FRONT/GLASS REAR DOORS</b>								
TA1RPT-1S-1G	2	31	1/2	10.4	contact factory	29"	37 1/2"	78 1/4"
TA2RPT-2S-2G	4	56	3/4	15.5	contact factory	51 3/8"	37 1/2"	78 1/4"
<b>SOLID FRONT HALF DOORS/GLASS REAR DOORS</b>								
TA1RPT-2HS-1G	3	31	1/2	10.4	contact factory	29"	37 1/2"	78 1/4"
TA2RPT-4HS-2G	6	56	3/4	15.5	contact factory	51 3/8"	37 1/2"	78 1/4"
<b>GLASS FRONT/GLASS REAR DOORS</b>								
TA1RPT-1G-1G	2	31	1/2	10.4	440	29"	37 3/8"	78 1/4"
TA2RPT-2G-2G	4	56	3/4	15.5	790	51 3/8"	37 3/8"	78 1/4"
<b>GLASS FRONT HALF DOORS/GLASS REAR DOORS</b>								
TA1RPT-2HG-1G	3	31	1/2	10.4	contact factory	29"	37 3/8"	78 1/4"
TA2RPT-4HG-2G	6	56	3/4	15.5	contact factory	51 3/8"	37 3/8"	78 1/4"
<b>COMBO FRONT HALF DOOR/GLASS REAR DOORS</b>								
TA1RPT-1HG/1HS-1G	3	31	1/2	10.4	contact factory	29"	37 3/8"	78 1/4"
TA2RPT-2HG/2HS-2G	6	56	3/4	15.5	contact factory	51 3/8"	37 3/8"	78 1/4"

\* Height does not include 5" for castor height or 6" for optional legs and 1" for system mechanical components

† Depth does not include 1 5/8" for door handles front and rear (glass door models only)

#### ROLL-IN REFRIGERATORS - TA SERIES

Model	Doors	Cu. Ft.	HP	Amps	Crated Wt.	L	D	H*
TA1RRI-1S	1	37	1/3	8.9	400	35"	34 1/2"	83 3/4"
TA2RRI-2S	2	75	1/2	11.8	706	68"	34 1/2"	83 3/4"
<b>89" HIGH</b>								
TA1RRI89-1S	1	38	1/3	8.9	485	35"	34 1/2"	89"
TA2RRI89-2S	2	80	1/2	11.8	786	68"	34 1/2"	89"

#### ROLL-THRU REFRIGERATORS - TA SERIES

TA1RRT-1S-1S	2	37	1/3	8.9	475	35"	36 7/8"	83 3/4"
TA2RRT-2S-2S	4	75	1/2	9.5	781	68"	36 7/8"	83 3/4"
<b>89" HIGH</b>								
TA1RRT89-1S-1S	2	38	1/3	8.9	495	35"	36 7/8"	89"
TA2RRT89-2S-2S	4	80	1/2	9.5	821	68"	36 7/8"	89"

#### ROLL-IN FREEZER - TA SERIES

TA1FRI-1S	1	37	3/4	12.2	485	35"	34 1/2"	83 3/4"
-----------	---	----	-----	------	-----	-----	---------	---------

#### ROLL-IN HEATED CABINETS - TA SERIES

Model	Doors	Cu. Ft.	Watts	Crated Wt.	L	D	H	
TA1HRI-1S ‡	1	37	2000	325	35"	34 1/2"	83 3/4"	
TA2HRI-2S ‡	2	75	4000	615	68"	34 1/2"	83 3/4"	
<b>89" HIGH</b>								
TA1HRI89-1S ‡	1	38	2000	385	35"	34 1/2"	89"	
<b>ROLL-THRU HEATED CABINETS - TA SERIES</b>								
TA1HRT-1S-1S ‡	2	37	2000	400	35"	36 7/8"	83 3/4"	
TA2HRT-2S-2S ‡	4	75	4000	706	68"	36 7/8"	83 3/4"	
<b>89" HIGH</b>								
TA1HRT89-1S-1S ‡	2	38	2000	500	35"	36 7/8"	89"	

\* Height does not include 1" for system mechanical components

‡ Requires 115/208-240/60 Hz, single phase, 3 pole, 4 wire circuit

Note: TA2HRI-2S, TA2HRT-2S-2S require hard wiring

## TG Series Deep Reach-Ins

### Features / Benefits

- Shelving - (3) heavy duty, PVC wire shelves per section (shipped separately) (4) different interior kits available
- 300 series stainless steel front (the finest stainless available)
- Anodized quality aluminum sides, back, and bottom
- Refrigeration & freezer units interior have attractive, NSF approved, white aluminum sides and back, 300 series stainless floor and door liner
- Heater units have Anodized aluminum interior
- Foamed-in-place polyurethane high density cell insulation (CFC free)
- Lifetime guaranteed recessed door handles on solid door models
- Energy efficient, "Low-E", thermal glass on glass door models
- Extruded, aluminum door frames on glass doors
- Positive seal self-closing doors with 90 degree stay open feature. Lifetime guaranteed door hinges (excludes Heated Cabinets)
- Incandescent interior lighting (solid door); Fluorescent interior lighting (glass door)
- Door locks standard
- 4" diameter swivel castors standard equipment, 6" legs available
- Top mounted unit positioned out of food zone to maximize storage capacity.
- Refrigerator models feature glass condensate pan to prevent electrolysis
- Self-contained system
- Remote units available for refrigerator and dual temperature models
- Curb mountable units available

### Refrigeration Units Have...

- Oversized and balanced, environmentally friendly, refrigeration system, factory sealed and pre-lubricated for long life - hold 33°F to 38°F
- Exterior mounted digital electronic thermometer features manual defogger
- Hot gas condensate for energy efficiency

### Freezer Units Have...

- Environmentally friendly (R404A), refrigerant
- Freezer holds -10°F (air off evaporator coil, -20°F) for the best in food preservation
- Automatic defrost system time-initiated, temperature-terminated
- Exterior mounted digital electronic thermometer features manual defogger
- Automatic evaporator fan motor delay during defrost cycle
- Minimum wattage heater in cabinet frame and door
- Standard backguard improves airflow. (excludes PT models)
- Pass-thru freezer designed to be rear-loaded from prep area and front accessed

### Heated Units Have...

- Powerfully provides holding temperatures of 80°F to 180°F throughout the cabinet for uniform, forced air, heating
- Heater - stainless steel for corrosion resistance
- Humidity control - 12" x 20" pan standard
- Manual humidity control is a standard feature (turn counterclockwise to ventilate)
- Pass-thru heated cabinet designed to be rear-loaded from prep area and front accessed
- Doors equipped with lifetime guaranteed self-closing hinges with 120° stay open feature standard

### Dual Temperature Units Have...

- True's dual temperature models are equipped with two, self-contained, independent refrigeration systems (CFC free)
- TG1DT-2HS has refrigerator

- on top and freezer on bottom, TG2DT-2S has refrigerator on left and freezer on right; refrigerator holds 33°F to 38°F, freezer holds -10°F
- Compartmentalized, incandescent, interior lighting (one for each door)
- Automatic defrost system time-initiated, time-terminated in single section models; time-initiated, temperature-terminated in two section models
- Automatic evaporator fan motor delay during defrost cycle
- Minimum wattage heater in cabinet frame and door
- Dual exterior mounted temperature monitors
- Freezer compartment standard with backguard to improve airflow



TG1R-2HG



TG2DT-2S

### REACH-IN REFRIGERATORS - TG SERIES

Model	Doors	Cu. Ft.	HP	Amps	Crated Wt.	L	D†	H*
<b>SOLID DOORS</b>								
TG1R-1S	1	31	1/3	8.5	370	29"	34 3/4"	78 1/4"
TG2R-2S	2	56	1/2	10.0	650	51 3/8"	34 3/4"	78 1/4"
TG3R-3S	3	85	1/2	11.8	770	76 1/2"	34 3/4"	78 1/4"
<b>GLASS DOORS</b>								
TG1R-1G	1	31	1/3	9.0	410	29"	34 7/8"	78 1/4"
TG2R-2G	2	56	1/2	11.4	710	51 3/8"	34 7/8"	78 1/4"
TG3R-3G	3	85	3/4	13.6	867	76 1/2"	34 7/8"	78 1/4"
<b>SOLID HALF DOORS</b>								
TG1R-2HS	2	31	1/3	8.5	390	29"	34 3/4"	78 1/4"
TG2R-4HS	4	56	1/2	10.0	650	51 3/8"	34 3/4"	78 1/4"
TG3R-6HS	6	85	1/2	11.8	770	76 1/2"	34 3/4"	78 1/4"
<b>GLASS HALF DOORS</b>								
TG1R-2HG	2	31	1/3	9.0	465	29"	34 7/8"	78 1/4"
TG2R-4HG	4	56	1/2	11.4	660	51 3/8"	34 7/8"	78 1/4"
<b>COMBINATION HALF DOORS</b>								
TG1R-1HG/1HS	2	31	1/3	9.0	465	29"	34 7/8"	78 1/4"
TG2R-2HG/2HS	4	56	1/2	10.0	640	51 3/8"	34 7/8"	78 1/4"

### REACH-IN FREEZERS - TG SERIES

Model	Doors	Cu. Ft.	HP	Amps	Crated Wt.	L	D†	H*
<b>SOLID DOORS</b>								
TG1F-1S	1	31	1/2	10.8	410	29"	34 3/4"	78 1/4"
TG2F-2S	2	56	3/4	13.0	704	51 3/8"	34 3/4"	78 1/4"
TG3F-3S‡	3	85	1 1/2	11.8	790	76 1/2"	34 3/4"	78 1/4"
<b>GLASS DOORS</b>								
TG1F-1G	1	31	3/4	10.2	435	29"	34 7/8"	78 1/4"
TG2F-2G‡	2	56	1	9.1	725	51 3/8"	34 7/8"	78 1/4"
<b>HALF DOORS</b>								
TG1F-2HS	2	31	1/2	10.8	410	29"	34 3/4"	78 1/4"
TG2F-4HS	4	56	3/4	13.0	704	51 3/8"	34 3/4"	78 1/4"
TG3F-6HS‡	6	85	1 1/2	11.8	725	76 1/2"	34 3/4"	78 1/4"
<b>PASS-THRU SOLID DOORS</b>								
TG2FPT-2S-2S‡	4	56	1	9.1	754	51 3/8"	37 1/4"	78 1/4"

### REACH-IN HEATED CABINETS - TG SERIES

Model	Doors	Cu. Ft.	HP	Amps	Crated Wt.	L	D†	H*
<b>SOLID DOORS</b>								
TG1H-1S‡	1	31	2000	N/A	350	29"	34 3/4"	78 1/4"
TG2H-2S‡	2	56	4000	N/A	565	51 3/8"	34 3/4"	78 1/4"

### REACH-IN DUAL TEMPERATURE - TG SERIES

Model	Doors	Reg - Frz	Reg - Frzr	Amps	Wt.	L	D††	H*
<b>SOLID DOORS</b>								
TG1DT-2HS	2	13 - 13	1/5 - 1/3	13.2	480	29"	34 3/4"	78 1/4"
TG2DT-2S‡	2	26 - 24	1/3 - 1/2	12.2	725	51 3/8"	34 3/4"	78 1/4"

\* Height does not include 5" for castor height or 6" for optional legs and 1" for system mechanical components

† Depth does not include 1 1/8" for door handle (glass door models only)

†† Depth does not include 2 1/2" for upper rear condensate enclosure

‡ Requires 115/208-230/60 Hz, single phase, 3 pole, 4 wire circuit

## Reach-Ins

### TG Series Pass-Thrus

#### Features / Benefits

- Shelving - (3) heavy duty, PVC wire shelves per section (shipped separately) (4) different interior kits available
- Oversized and balanced, environmentally friendly, refrigeration system, factory sealed and pre-lubricated for long life
- Food safe refrigerators hold 33°F to 38°F
- 300 series stainless steel front (the finest stainless available)
- Anodized quality aluminum sides, back, and bottom
- Refrigeration units interior have - attractive, NSF approved, white aluminum sides and back, 300 series stainless floor and door liner (solid doors). Heated units have Anodized aluminum interior
- The utility of the "TG" series pass-thru is in its ability to be a server station for cold dishes. Designed to become a central station, rear-loaded from the kitchen prep area to be front-accessed by servers
- Foamed-in-place polyurethane high density cell insulation (CFC free)
- Refrigeration units have exterior mounted digital electronic thermometer features manual defogger. Heated units have exterior mounted, color coded, temperature monitor

- Positive seal self-closing doors with 120° stay open feature. Lifetime guaranteed door hinges
- Incandescent interior lighting (solid door). Fluorescent interior lighting (glass door)
- Door locks standard
- Extruded, aluminum door frames on glass doors
- 4" diameter swivel castors standard equipment. 6" legs available
- Hot gas condensate for energy efficiency on refrigerators
- Top mounted unit positioned out of food zone to maximize storage capacity
- Refrigerator models feature glass condensate pan to prevent electrolysis
- Self-contained system
- Remote units available for refrigerators
- Curb mountable units available



#### Heated Units Have...

- Powerfully provides holding temperatures of 80°F to 180°F throughout the cabinet for uniform, forced-air, heating
- Heater - stainless steel for corrosion resistance
- Humidity control - 12" x 20" pan standard
- Manual humidity control is a standard feature (turn counterclockwise to ventilate)
- Pass-thru heated cabinet designed to be rear-loaded from prep area and front accessed
- Doors equipped with lifetime guaranteed self-closing hinges with 120° stay open feature standard



TG1RPT-1S-1S



TG2RPT-2S-2S

#### PASS-THRU REFRIGERATORS - TG SERIES

Model	Doors	Cu. Ft.	HP	Amps	Crated Wt.	L	D†	H*
<b>SOLID DOORS</b>								
TG1RPT-1S-1S	2	31	1/2	10.4	370	29"	37 1/4"	78 1/4"
TG2RPT-2S-2S	4	56	3/4	15.5	710	51 3/8"	37 1/4"	78 1/4"
<b>HALF-DOOR SOLID FRONT DOORS</b>								
TG1RPT-2HS-1S	3	31	1/2	10.4	535	29"	37 1/4"	78 1/4"
TG2RPT-4HS-2S	6	56	3/4	15.5	contact factory	51 3/8"	37 1/4"	78 1/4"
<b>GLASS FRONT/SOLID REAR DOORS</b>								
TG1RPT-1G-1S	2	31	1/2	10.4	525	29"	37 1/2"	78 1/4"
TG2RPT-2G-2S	4	56	3/4	15.5	contact factory	51 3/8"	37 1/2"	78 1/4"
<b>HALF-DOOR GLASS FRONT/SOLID REAR DOORS</b>								
TG1RPT-2HG-1S	3	31	1/2	10.4	contact factory	29"	37 1/2"	78 1/4"
TG2RPT-4HG-2S	6	56	3/4	15.5	contact factory	51 3/8"	37 1/2"	78 1/4"
<b>HALF-DOOR COMBO FRONT/SOLID REAR DOORS</b>								
TG1RPT-1HG/1HS-1S	3	31	1/2	10.4	contact factory	29"	37 1/2"	78 1/4"
TG2RPT-2HG/2HS-2S	6	56	3/4	15.5	contact factory	51 3/8"	37 1/2"	78 1/4"
<b>SOLID FRONT/GLASS REAR DOORS</b>								
TG1RPT-1S-1G	2	31	1/2	10.4	525	29"	37 1/2"	78 1/4"
TG2RPT-2S-2G	4	56	3/4	15.5	contact factory	51 3/8"	37 1/2"	78 1/4"
<b>HALF-DOOR SOLID FRONT/GLASS REAR DOORS</b>								
TG1RPT-2HS-1G	3	31	1/2	10.4	contact factory	29"	37 1/2"	78 1/4"
TG2RPT-4HS-2G	6	56	3/4	15.5	contact factory	51 3/8"	37 1/2"	78 1/4"
<b>GLASS FRONT DOOR/GLASS REAR DOORS</b>								
TG1RPT-1G-1G	2	31	1/2	10.4	440	29"	37 5/8"	78 1/4"
TG2RPT-2G-2G	4	56	3/4	15.5	740	51 3/8"	37 5/8"	78 1/4"
<b>HALF-DOOR GLASS FRONT/GLASS REAR DOORS</b>								
TG1RPT-2HG-1G	3	31	1/2	10.4	contact factory	29"	37 5/8"	78 1/4"
TG2RPT-4HG-2G	6	56	3/4	15.5	contact factory	51 3/8"	37 5/8"	78 1/4"
<b>HALF-DOOR COMBO FRONT/GLASS REAR DOORS</b>								
TG1RPT-1HG/1HS-1G	3	31	1/2	10.4	contact factory	29"	37 5/8"	78 1/4"
TG2RPT-2HG/2HS-2G	6	56	3/4	15.5	contact factory	51 3/8"	37 5/8"	78 1/4"

\* Height does not include 5" for castor height or 6" for optional legs or 1" for system mechanical components

† Depth does not include 1 1/2" for door handles (glass door models only)

Note: Models with glass front & rear doors will be 2 3/4"

#### PASS-THRU HEATED CABINET - TG SERIES

Model	Doors	Cu. Ft.	Watts	Amps	Crated Wt.	L	D	H*
<b>SOLID DOORS</b>								
TG1HPT-1S-1S‡	2	31	2000	N/A	400	29"	37 1/4"	78 1/4"
TG2HPT-2S-2S‡	4	56	4000	N/A	600	51 3/8"	37 1/4"	78 1/4"

\* Height does not include 6" for legs or 5" for optional castors (castors available on single section models only) and 1" for system mechanical components

‡ Requires 115/208-240/60 Hz, single phase, 3 pole, 4 wire circuit

Note: TG2HPT-2S-2S requires hard wiring

## TG Series Roll-Ins & Roll-Thrus

### Features / Benefits

- Accepts roll-in rack (inboard castor) with maximum dimensions of 27" w. x 29" d. x 66" h. TG1RRI89-1S, TG2RRI89-2S, TG1RRT89-1S-1S, TG2RRT89-2S-2S, TG1HRI89-1S and TG1HRT89-1S-1S accept roll-in rack (inboard castor) with maximum dimensions of 27" w. x 29" d. x 72" h. (supplied by others)
- 300 series stainless steel, front (the finest stainless available)
- Anodized quality aluminum sides, back, and bottom
- Interior - attractive, NSF approved, white aluminum sides and back. 300 series stainless floor and door liner except the heated units which have Anodized aluminum interior
- Three rugged cam-lift hinges per door - lifetime guaranteed. Designed for easy product access with a full 180° open capability and stay open feature at 120°
- Heavy gauge stainless steel ramp standard for each door
- Exterior mounted digital electronic thermometer features manual defogger except the heated units which have exterior mounted, color coded, temperature monitor
- Interior bumpers protect cabinet
- Foamed-in-place polyurethane high density cell insulation (CFC Free)
- Incandescent interior lighting
- Lifetime guaranteed recessed door handles
- Top mounted unit positioned out of food zone to maximize storage capacity

- Self-contained system
- Reversible wiper gaskets for positive seal
- Field reversible door swing
- Remote units available for refrigerators and freezers

### Refrigeration Units Have...

- Oversized and balanced, environmentally friendly, refrigeration system, factory sealed and pre-lubricated for long life - hold 33°F to 38°F
- Heavy gauge doors
- Glass condensate pan to prevent electrolysis
- Hot gas condensate for energy efficiency
- Energy saver switch

### Freezer Units Have...

- Oversized and balanced, environmentally friendly, refrigeration system, factory sealed and pre-lubricated for long life
- Freezer holds -10°F (air off evaporator coil, -20°F) for the best in food preservation
- An ideal -10°F for roll-in racks supporting frozen food and ice cream
- Automatic defrost system time-initiated, temperature-terminated
- Automatic evaporator fan motor delay during defrost cycle

- Minimum wattage heater in cabinet frame
- Standard backguard improves airflow
- Energy saver switch

### Heated Units Have...

- Powerfully provides holding temperatures of 80°F to 180°F throughout the cabinet for uniform, forced-air, heating
- Heater - stainless steel for corrosion resistance
- Humidity control - 12" x 20" pan standard
- Manual humidity control is a standard feature (turn counterclockwise to ventilate)
- Roll-thru heated cabinet designed to be rear-loaded from prep area and front accessed
- Heavy gauge doors



### ROLL-IN REFRIGERATORS - TG SERIES

Model	Doors	Cu.Ft.	HP	Amps	Crated Wt.	L	D	H*
TG1RRI-1S	1	37	1/3	8.9	400	35"	34 1/2"	83 3/4"
TG2RRI-2S	2	75	1/2	11.8	706	68"	34 1/2"	83 3/4"
<b>89" HIGH</b>								
TG1RRI89-1S	1	38	1/3	8.9	485	35"	34 1/2"	89"
TG2RRI89-2S	2	80	1/2	11.8	786	68"	34 1/2"	89"

### ROLL-THRU REFRIGERATORS - TG SERIES

TG1RRT-1S-1S	2	37	1/3	8.9	475	35"	36 7/8"	83 3/4"
TG2RRT-2S-2S	4	75	1/2	9.5	781	68"	36 7/8"	83 3/4"
<b>89" HIGH</b>								
TG1RRT89-1S-1S	2	38	1/3	8.9	495	35"	36 7/8"	89"
TG2RRT89-2S-2S	4	80	1/2	9.5	821	68"	36 7/8"	89"

### ROLL-IN FREEZER - TG SERIES

TG1FRI-1S	1	37	3/4	12.2	485	35"	34 1/2"	83 3/4"
-----------	---	----	-----	------	-----	-----	---------	---------

### ROLL-IN HEATED CABINETS - TG SERIES

Model	Doors	Cu.Ft.	Watts	Amps	Crated Wt.	L	D	H*
TG1HRI-1S ‡	1	37	2000	N/A	325	35"	34 1/2"	83 3/4"
TG2HRI-2S ‡	2	75	4000	N/A	615	68"	34 1/2"	83 3/4"
<b>89" HIGH</b>								
TG1HRI89-1S ‡	1	38	2000	N/A	385	35"	34 1/2"	89"

### ROLL-THRU HEATED CABINETS - TG SERIES

TG1HRT-1S-1S ‡	2	37	2000	N/A	400	35"	36 7/8"	83 3/4"
TG2HRT-2S-2S ‡	4	75	4000	N/A	706	68"	36 7/8"	83 3/4"
<b>89" HIGH</b>								
TG1HRT89-1S-1S ‡	2	38	2000	N/A	500	35"	36 7/8"	89"

\* Height does not include 1" for system mechanical components  
 ‡ Requires 115/208-240/60 Hz, single phase, 3 pole, 4 wire circuit  
 Note: TG2HRI-2S and TG2HRT-2S-2S requires hard wiring



TG1FRI-1S

TG1RRT89-1S-1S



TG2RRT-2S-2S

## Food Prep Tables

### Features / Benefits

- Oversized and balanced, environmentally friendly (134A), refrigeration system, with airflow directed at pans for colder temperatures. Guided airflow provides uniform temperature in a 360° circle throughout cabinet for stay-fresh meats and cheeses, and colder crisper salads
- Holds 33°F to 41°F product temperature in pans
- All stainless steel front, top and sides
- Stainless steel patented foam insulated cover keeps pans colder to lock in freshness - minimizes condensation
- Aluminum finished back
- Interior - attractive, NSF approved, white aluminum sides and top, coved corners and 300 series stainless steel floor
- 5" diameter castors standard (legs available)
- Doors swing within cabinet dimensions
- Recessed handles
- Adjustable, heavy duty, PVC coated wire shelves (not available in drawered models)
- Foamed-in-place polyurethane high density cell insulation (CFC free)
- Rear bumpers (except dual-sided models)
- Front breathing.
- Effective April 1, 1998 all production of True models comply with NSF-7 rating
- Remote units available

### Sandwich/Salad Units Have...

- Extra deep 11 3/4" full length removable cutting board. Versatile, sanitary, white polyethylene provides tough surface. Large comfortable working area
- Standard full set (1/2 size) 6 7/8" l. x 6 1/4" w. x 4" d. clear polycarbonate insert pans included (positioned in countertop). Also accommodates 6" and 8" deep pans (drawered models will not accommodate 8" deep condiment pans)
- Available with optional 19" cutting board, crumb catcher or overshelf (19" cutting board excludes dual sided & drawered models). Composite cutting boards also available
- ADA compliant models available. 34" work surface height (TSSU models -27, -36, -48, -60, -72)

### Mega Top Sandwich/Salad Units Have...

- 8 7/8" wide full length removable cutting board. Versatile, sanitary, high density polyethylene provides tough surface. Large comfortable working area
- Standard (1/2 size) 6 7/8" l. x 6 1/4" w. x 4" d. NSF approved clear polycarbonate insert pans included. Also accommodates 6" and 8" deep pans (except M-C model). (TSSU-27-12M-B standard with nine 1/2 and three 1/4 size pans; TSSU-27-12M-C standard with twelve 1/2 size pans); positioned in countertop
- Back hood and lid are removable for cleaning purposes

### Dual Sided Units Have...

- Food prep access from both sides for high volume access along with the space efficiency of an island prep table
- Standard with 11 3/4" white polyethylene cutting board

### Drawered Units Have...

- Accommodate one 12" l. x 20" w. x 6" d. pan per drawer (drawer pans not included). (48" models accommodate one 12" l. x 18" w. x 6" d. food storage box or one 1/2 size and one 1/2 size pan per drawer; not included)

### Pizza Prep Units Have...

- Oversized and balanced (134A), environmentally friendly, refrigeration system, with airflow directed at pans to hold 33°F to 41°F temperature
- Extra-deep 19 1/2" full length removable white polyethylene cutting board included
- Standard full set of (1/2 size) 12 3/4" l. x 6 1/4" w. x 6" d. NSF approved clear polycarbonate food storage pans included in condiment rail
- Work surface 36" high
- Drawered models (drawered section only) will accommodate up to two 8" deep full size pans (12" l. x 20" w. x 8" d.) per drawer. Pans not included
- Garnish rack and service shelf optional (garnish racks are not available on TPP-60, TPP-60D-2; service shelf is not available on TPP-119 & TPP-119D-8)



TSSU-27-12M-B



TPP-67D-2

### SANDWICH / SALAD UNITS

Model	Doors/ Drawers	Cu. Ft.	# of Shelves	# of Pans	HP	Amps	Crated Wt.	L**	D†	H*
TSSU-27-8	1/0	6.5	2	8	1/2	4.9	200	27 5/8" x 30 1/8" x 36 3/4"		
TSSU-36-8	2/0	8.5	4	8	1/3	8.3	240	36 3/8" x 30 1/8" x 36 3/4"		
TSSU-48-8	2/0	12.0	4	8	1/3	8.6	290	48 3/8" x 30 1/8" x 36 3/4"		
TSSU-48-10	2/0	12.0	4	10	1/3	8.6	285	48 3/8" x 30 1/8" x 36 3/4"		
TSSU-48-12	2/0	12.0	4	12	1/3	8.6	285	48 3/8" x 30 1/8" x 36 3/4"		
TSSU-60-8	2/0	15.5	4	8	1/3	7.8	330	60 3/8" x 30 1/8" x 36 3/4"		
TSSU-60-10	2/0	15.5	4	10	1/3	7.8	330	60 3/8" x 30 1/8" x 36 3/4"		
TSSU-60-12	2/0	15.5	4	12	1/3	7.8	345	60 3/8" x 30 1/8" x 36 3/4"		
TSSU-60-16	2/0	15.5	4	16	1/3	7.8	340	60 3/8" x 30 1/8" x 36 3/4"		
TSSU-72-18	3/0	19.0	6	18	1/2	10.3	425	72 3/8" x 30 1/8" x 36 3/4"		
<b>DUAL SIDED MODEL</b>										
TSSU-60-16-DS-ST	2/0	15.5	4	16	1/3	7.8	380	60 3/8" x 38 3/4" x 31 3/8"		
<b>DRAWERED</b>										
TSSU-27-8D-2	0/2	6.5	N/A	8	1/2	4.9	230	27 5/8" x 30 1/8" x 36 3/4"		
TSSU-48-12D-2	1/2	12.0	2	12	1/3	8.6	335	48 3/8" x 30 1/8" x 36 3/4"		
TSSU-48-12D-4	0/4	12.0	N/A	12	1/3	8.6	335	48 3/8" x 30 1/8" x 36 3/4"		
TSSU-60-16D-2	1/2	15.5	2	16	1/3	7.8	380	60 3/8" x 30 1/8" x 36 3/4"		
TSSU-60-16D-4	0/4	15.5	N/A	16	1/3	7.8	400	60 3/8" x 30 1/8" x 36 3/4"		

All models listed are available with optional crumb catcher

All models listed are available with optional 19" cutting board (excludes dual sided & drawered models)

\* Height does not include 6 1/4" for castors or 6" for optional legs

† Depth does not include 1" for rear bumpers

\*\* Length dimension does not include 1/8" (each side) for lid pins, TSSU-27's only

Note: Door/drawer combination cabinets require customer to designate door/drawer orientation

to designate door/drawer orientation

### MEGA TOP SANDWICH/SALAD UNITS

Model	Doors	Cu. Ft.	# of Shelves	# of Pans	HP	Amps	Crated Wt.	L**	D†	H*
TSSU-27-12M-B	1	6.5	2	12	1/2	4.9	210	27 5/8" x 34 1/8" x 40 3/8"		
TSSU-27-12M-C	1	6.5	2	12	1/2	4.9	210	27 5/8" x 34 1/8" x 40 3/8"		
TSSU-36-12M-B	2	8.5	4	12	1/3	8.3	258	36 3/8" x 34 1/8" x 40 3/8"		
TSSU-48-12M-B	2	12.0	4	12	1/3	8.6	305	48 3/8" x 34 1/8" x 40 3/8"		
TSSU-48-15M-B	2	12.0	4	15	1/3	8.6	305	48 3/8" x 34 1/8" x 40 3/8"		
TSSU-48-18M-B	2	12.0	4	18	1/3	8.6	305	48 3/8" x 34 1/8" x 40 3/8"		
TSSU-60-24M-B-ST	2	15.5	4	24	1/3	7.8	355	60 3/8" x 34 1/8" x 40 3/8"		
TSSU-72-30M-B-ST	3	19.0	6	30	1/2	10.3	425	72 3/8" x 34 1/8" x 40 3/8"		

### DUAL SIDED MODELS

TSSU-60-24M-B-DS-ST	2	15.5	4	24	1/3	7.8	395	60 3/8" x 40 3/8" x 31 3/8"		
TSSU-72-30M-B-DS-ST	3	19.0	6	30	1/2	10.3	485	72 3/8" x 41 7/8" x 31 3/8"		

\* Height does not include 6 1/4" for castors or 6" for optional legs

† Depth dimension does not include 1" for rear bumpers or

6 1/4" on dual sided models for cutting boards

\*\* Length dimension does not include 1/8" (each side) for lid pins, TSSU-27's only and 1/4" each side for cutting board brackets on Mega Top Dual Sided models

### PIZZA PREP TABLES

Model	Doors/ Drawers	Cu. Ft.	# of Shelves	# of Pans	HP	Amps	Crated Wt.	L**	D†	H*
TPP-44	1/0	11.4	2	6	1/3	8.6	305	44 1/2" x 32 1/4" x 35 3/4"		
TPP-60	2/0	15.9	4	8	1/3	7.9	375	60 1/4" x 32 1/4" x 35 3/4"		
TPP-67	2/0	20.6	4	9	1/3	8.6	400	67 1/4" x 32 1/4" x 35 3/4"		
TPP-93	3/0	30.9	6	12	1/2	9.7	570	93 1/4" x 32 1/4" x 35 3/4"		
TPP-119	4/0	43.9	8	15	1/2	10.8	695	119 1/4" x 32 1/4" x 35 3/4"		
<b>DRAWERED</b>										
TPP-44D-2	0/2	11.4	N/A	6	1/3	8.6	350	44 1/2" x 32 1/4" x 35 3/4"		
TPP-60D-2	1/2	15.9	2	8	1/3	7.9	420	60 1/4" x 32 1/4" x 35 3/4"		
TPP-67D-2	1/2	20.6	2	9	1/3	8.6	435	67 1/4" x 32 1/4" x 35 3/4"		
TPP-67D-4	0/4	20.6	N/A	9	1/3	8.6	490	67 1/4" x 32 1/4" x 35 3/4"		
TPP-93D-2	2/2	30.9	4	12	1/2	9.7	695	93 1/4" x 32 1/4" x 35 3/4"		
TPP-93D-4	1/4	30.9	2	12	1/2	9.7	695	93 1/4" x 32 1/4" x 35 3/4"		
TPP-119D-2	0/6	30.9	N/A	12	1/2	9.7	695	93 1/4" x 32 1/4" x 35 3/4"		
TPP-119D-2	3/2	43.9	6	15	1/2	10.8	865	119 1/4" x 32 1/4" x 35 3/4"		
TPP-119D-4	2/4	43.9	4	15	1/2	10.8	865	119 1/4" x 32 1/4" x 35 3/4"		
TPP-119D-6	1/6	43.9	2	15	1/2	10.8	865	119 1/4" x 32 1/4" x 35 3/4"		
TPP-119D-8	0/8	43.9	N/A	15	1/2	10.8	865	119 1/4" x 32 1/4" x 35 3/4"		

\* Height does not include 6 1/4" for castors or 6" for optional legs

† Depth dimension does not include 3" for cutting boards and

1" for rear bumpers and 1/4" for front bumper

\*\* Length dimension does not include 1/4" (each side) for cutting board brackets and 3/8" each side for lid pins on TPP-60, TPP-60D-2, TPP-67, TPP-67D-2 and TPP-67D-4

Note: Door/drawer combination cabinets require customer to designate door/drawer orientation

## Features / Benefits

- Oversized, environmentally friendly refrigeration system (refrigerators: 134A / freezers: R404A)
- Refrigerator holds 33°F to 38°F temperature; freezer holds -10°F
- 360° circular airflow for uniform product cooling
- All stainless steel front, top and sides
- Interior - attractive, NSF approved, white aluminum sides and top, coved corners and 300 series stainless steel floor
- Aluminum finished back
- Energy efficient, "Low-E", thermal glass on glass door models
- Undercounter units easily slide under counters, maximizes space for refrigerated food storage in fast food line-up
- Recessed handles (excludes glass door models)
- Extruded, aluminum door frames on glass doors
- Front breathing
- Doors swing within cabinet dimensions

- Self-contained system
- Adjustable, heavy duty, PVC coated wire shelves (not available in drawered models)
- Foamed-in-place high density polyurethane insulation (CFC free)
- 5" diameter castors standard equipment (legs available)
- Work surface 36" high
- Low profile or ADA models available - consult factory for availability
- Heavy, 16 gauge tops available - upcharge applies
- Remote units available
- Automatic freezer defrost system is time-initiated, time-terminated

## Deep Units Have...

- Features the combined advantage of convenient undercounter placement or worktop prep space with deeper refrigerated storage
- Door models accommodate half bun tray rack; applies to only one door of TUC-60-32 & TWT-60-32 (18" x 26" sheet pan) - not included

## Worktop Units Have...

- Stainless steel backsplash - one piece formed construction. No bacteria or food particles can be trapped underneath as with other two piece worktop units

## Drawered Models

- Consult factory for pan dimension details



TUC-60G



## UNDERCOUNTERS

Model	Doors/ Drawers	Cu. Ft.	# of Shelves	HP	Amps	Crated Wt.	L	D†	H*
<b>REFRIGERATORS</b>									
TUC-27	1/0	6.5	2	1/6	3.9	190	27 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-36	2/0	8.5	4	1/6	4.7	225	36 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-48	2/0	12.0	4	1/5	5.0	270	48 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-60	2/0	15.5	4	1/5	5.1	320	60 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-72	3/0	19.0	6	1/3	8.5	390	72 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
<b>FREEZERS</b>									
TUC-27F	1/0	6.5	2	1/3	8.3	195	27 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-48F	2/0	12.0	4	1/2	10.9	300	48 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-60F	2/0	15.5	4	1/2	10.9	355	60 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
<b>GLASS DOOR REFRIGERATORS</b>									
TUC-27G	1/0	6.5	2	1/6	3.9	210	27 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-48G	2/0	12.0	4	1/5	5.0	290	48 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-60G	2/0	15.5	4	1/5	5.1	360	60 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
<b>GLASS DOOR FREEZER</b>									
TUC-27FG	1/0	6.5	2	1/2	8.6	230	27 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
<b>DRAWERED REFRIGERATORS</b>									
TUC-27D-2	0/2	6.5	N/A	1/6	3.9	210	27 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-48D-2	1/2	12.0	2	1/5	5.0	310	48 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-48D-4	0/4	12.0	N/A	1/5	5.0	310	48 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-60D-2	1/2	15.5	2	1/5	5.1	380	60 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-60D-4	0/4	15.5	N/A	1/5	5.1	380	60 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
<b>DRAWERED FREEZERS</b>									
TUC-27F-D-2	0/2	6.5	N/A	1/3	7.4	215	27 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-48F-D-4	0/4	12.0	N/A	1/2	10.9	355	48 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
<b>DEEP UNDERCOUNTERS</b>									
<b>REFRIGERATORS</b>									
TUC-44	1/0	11.4	2	1/5	5.1	285	44 <sup>1</sup> / <sub>2</sub> " x 32 <sup>1</sup> / <sub>4</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-60-32	2/0	15.9	4	1/5	5.1	355	60 <sup>1</sup> / <sub>4</sub> " x 32 <sup>1</sup> / <sub>4</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-67	2/0	20.6	4	1/5	5.1	375	67 <sup>1</sup> / <sub>4</sub> " x 32 <sup>1</sup> / <sub>4</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-93	3/0	30.9	6	1/2	9.7	520	93 <sup>1</sup> / <sub>4</sub> " x 32 <sup>1</sup> / <sub>4</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-119	4/0	43.9	8	1/2	12.0	660	119 <sup>1</sup> / <sub>4</sub> " x 32 <sup>1</sup> / <sub>4</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
<b>FREEZERS</b>									
TUC-44F	1/0	11.4	2	1/2	10.2	300	44 <sup>1</sup> / <sub>2</sub> " x 32 <sup>1</sup> / <sub>4</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-60F-32	2/0	15.9	4	1/2	10.4	385	60 <sup>1</sup> / <sub>4</sub> " x 32 <sup>1</sup> / <sub>4</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-67F	2/0	20.6	4	3/4	11.7	400	67 <sup>1</sup> / <sub>4</sub> " x 32 <sup>1</sup> / <sub>4</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-93F	3/0	30.9	6	3/4	10.2	530	93 <sup>1</sup> / <sub>4</sub> " x 32 <sup>1</sup> / <sub>4</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
<b>DRAWERED REFRIGERATORS</b>									
TUC-44D-2	0/2	11.4	N/A	1/5	5.1	285	44 <sup>1</sup> / <sub>2</sub> " x 32 <sup>1</sup> / <sub>4</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-60-32D-2	1/2	15.9	2	1/5	5.1	365	60 <sup>1</sup> / <sub>4</sub> " x 32 <sup>1</sup> / <sub>4</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-67D-2	1/2	20.6	2	1/5	5.1	415	67 <sup>1</sup> / <sub>4</sub> " x 32 <sup>1</sup> / <sub>4</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-67D-4	0/4	20.6	N/A	1/5	5.1	460	67 <sup>1</sup> / <sub>4</sub> " x 32 <sup>1</sup> / <sub>4</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-93D-2	2/2	30.9	4	1/2	9.7	575	93 <sup>1</sup> / <sub>4</sub> " x 32 <sup>1</sup> / <sub>4</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-93D-4	1/4	30.9	2	1/2	9.7	610	93 <sup>1</sup> / <sub>4</sub> " x 32 <sup>1</sup> / <sub>4</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-93D-6	0/6	30.9	N/A	1/2	9.7	655	93 <sup>1</sup> / <sub>4</sub> " x 32 <sup>1</sup> / <sub>4</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-119D-2	3/2	43.9	6	1/2	12.0	N/A	119 <sup>1</sup> / <sub>4</sub> " x 32 <sup>1</sup> / <sub>4</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-119D-4	2/4	43.9	4	1/2	12.0	N/A	119 <sup>1</sup> / <sub>4</sub> " x 32 <sup>1</sup> / <sub>4</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-119D-6	1/6	43.9	2	1/2	12.0	N/A	119 <sup>1</sup> / <sub>4</sub> " x 32 <sup>1</sup> / <sub>4</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		
TUC-119D-8	0/8	43.9	N/A	1/2	12.0	N/A	119 <sup>1</sup> / <sub>4</sub> " x 32 <sup>1</sup> / <sub>4</sub> " x 29 <sup>3</sup> / <sub>4</sub> "		

\* Height does not include 6<sup>1</sup>/<sub>4</sub>" for castors or 6" for optional legs

† Depth does not include 1" for rear bumpers or 1/4" for front bumpers

Note: Door/drawer combination cabinets require customer to designate door/drawer orientation

## WORKTOPS

Model	Doors/ Drawers	Cu. Ft.	# of Shelves	HP	Amps	Crated Wt.	L	D†	H*
<b>REFRIGERATORS</b>									
TWT-27	1/0	6.5	2	1/6	3.9	185	27 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-36	2/0	8.5	4	1/6	4.7	230	36 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-48	2/0	12.0	4	1/5	5.0	270	48 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-60	2/0	15.5	4	1/5	5.1	330	60 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-72	3/0	19.0	6	1/3	8.5	400	72 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
<b>FREEZERS</b>									
TWT-27F	1/0	6.5	2	1/3	8.3	195	27 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-48F	2/0	12.0	4	1/2	10.9	315	48 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-60F	2/0	15.5	4	1/2	10.9	355	60 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
<b>DRAWERED REFRIGERATORS</b>									
TWT-27D-2	0/2	6.5	N/A	1/6	3.9	210	27 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-48D-2	1/2	12.0	2	1/5	5.0	315	48 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-48D-4	0/4	12.0	N/A	1/5	5.0	315	48 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-60D-2	1/2	15.5	2	1/5	5.1	370	60 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-60D-4	0/4	15.5	N/A	1/5	5.1	370	60 <sup>3</sup> / <sub>8</sub> " x 30 <sup>1</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
<b>DEEP WORKTOPS</b>									
<b>REFRIGERATORS</b>									
TWT-44	1/0	11.4	2	1/5	5.1	285	44 <sup>1</sup> / <sub>2</sub> " x 32 <sup>3</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-60-32	2/0	15.9	4	1/5	5.1	360	60 <sup>1</sup> / <sub>4</sub> " x 32 <sup>3</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-67	2/0	20.6	4	1/5	5.1	380	67 <sup>1</sup> / <sub>4</sub> " x 32 <sup>3</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-93	3/0	30.9	6	1/2	9.7	535	93 <sup>1</sup> / <sub>4</sub> " x 32 <sup>3</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-119	4/0	43.9	8	1/2	12.0	660	119 <sup>1</sup> / <sub>4</sub> " x 32 <sup>3</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
<b>FREEZERS</b>									
TWT-44F	1/0	11.4	2	1/2	10.2	310	44 <sup>1</sup> / <sub>2</sub> " x 32 <sup>3</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-60F-32	2/0	15.9	4	1/2	10.4	370	60 <sup>1</sup> / <sub>4</sub> " x 32 <sup>3</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-67F	2/0	20.6	4	3/4	11.7	405	67 <sup>1</sup> / <sub>4</sub> " x 32 <sup>3</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-93F	3/0	30.9	6	3/4	10.2	545	93 <sup>1</sup> / <sub>4</sub> " x 32 <sup>3</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
<b>DRAWERED REFRIGERATORS</b>									
TWT-44D-2	0/2	11.4	N/A	1/5	5.1	285	44 <sup>1</sup> / <sub>2</sub> " x 32 <sup>3</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-60-32D-2	1/2	15.9	2	1/5	5.1	395	60 <sup>1</sup> / <sub>4</sub> " x 32 <sup>3</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-67D-2	1/2	20.6	2	1/5	5.1	430	67 <sup>1</sup> / <sub>4</sub> " x 32 <sup>3</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-67D-4	0/4	20.6	N/A	1/5	5.1	465	67 <sup>1</sup> / <sub>4</sub> " x 32 <sup>3</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-93D-2	2/2	30.9	4	1/2	9.7	610	93 <sup>1</sup> / <sub>4</sub> " x 32 <sup>3</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-93D-4	1/4	30.9	2	1/2	9.7	610	93 <sup>1</sup> / <sub>4</sub> " x 32 <sup>3</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-93D-6	0/6	30.9	N/A	1/2	9.7	610	93 <sup>1</sup> / <sub>4</sub> " x 32 <sup>3</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-119D-2	3/2	43.9	6	1/2	12.0	N/A	119 <sup>1</sup> / <sub>4</sub> " x 32 <sup>3</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-119D-4	2/4	43.9	4	1/2	12.0	725	119 <sup>1</sup> / <sub>4</sub> " x 32 <sup>3</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-119D-6	1/6	43.9	2	1/2	12.0	N/A	119 <sup>1</sup> / <sub>4</sub> " x 32 <sup>3</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		
TWT-119D-8	0/8	43.9	N/A	1/2	12.0	810	119 <sup>1</sup> / <sub>4</sub> " x 32 <sup>3</sup> / <sub>8</sub> " x 33 <sup>3</sup> / <sub>8</sub> "		

\* Height does not include 6<sup>1</sup>/<sub>4</sub>" for castors or 6" for optional legs

† Depth does not include 1" for rear bumpers or 1/4" for front bumper

Note: Door/drawer combination cabinets require customer to designate door/drawer orientation

### Chef Bases

#### Features / Benefits

- Oversized, environmentally friendly refrigeration system (134A)
- Holds 33°F to 38°F temperature
- All stainless steel front, top and sides
- Interior - attractive, NSF approved, white aluminum liner
- 300 series stainless steel floor with coved corners
- Aluminum finished back.
- Chef base top is made of one-piece heavy-duty, reinforced stainless steel with drip guard. True's drip resistant "V" edge protects against spills
- Top is insulated to eliminate heat transfer to interior of cabinet
- 4" diameter castors standard equipment (legs available)
- Strong, durable construction. TRCB-52 countertop supports up to 717 pounds of equipment. TRCB-79-86/82 countertop support up to 1,084 pounds of equipment TRCB-110 countertop supports up to 2,000 pounds of equipment
- Exterior mounted digital temperature monitor
- Feature recessed handles
- Foamed-in-place high density polyurethane insulation (CFC free)
- Front breathing
- Self-contained system
- Drawer fronts are stainless steel
- Accommodates two 12" l. x 20" w. x 4" d. pans per drawer (TRCB-52 & left side drawers of TRCB-82 accommodate three 12" l. x 20" w. x 4" d. pans per drawer) pans not included
- One, heavy gauge, removable, stainless steel pan divider per drawer (TRCB-52 & left side of TRCB-82 standard with two pan dividers per drawer)
- Each drawer is equipped with full perimeter magnetic gaskets (removable for cleaning)
- TRCB-79-86 features extended heavy duty top for additional equipment space
- Installation of a heat shield is recommended for optimum performance (supplied by others)
- Countertop cooking equipment should be used in conjunction with the manufacturer supplied legs. Minimum clearance of 4" required between bottom of cooking equipment heating element and TRCB top. Failure to provide clearance voids manufacturer warranty
- Remote units available



TRCB-52



TRCB-79-86

#### CHEF BASES

Model	Drawers	HP	Amps	Crated Wt.	L	D†	H*
TRCB-52	2	1/3	8.1	335	51 7/8"	32 1/8"	20 3/8"
TRCB-79	4	1/3	8.8	450	79 1/4"	30 1/2"	20 3/8"
TRCB-79-86	4	1/3	8.8	490	86 1/4"	30 1/2"	20 3/8"
TRCB-82	4	1/3	10.3	515	82 3/8"	32 1/8"	20 3/8"
TRCB-82-86	4	1/3	10.3	535	86 1/4"	32 1/8"	20 3/8"
TRCB-110	6	1/3	9.5	610	110"	30 1/2"	20 3/8"

\* Height does not include 5" for castors or 6" for optional legs

† Depth does not include 1" for rear bumpers

### Milk Coolers



#### Features / Benefits

- Environmentally friendly (134A) forced-air refrigeration system designed to create colder temperatures for improved milk safety
- Holds milk 33°F to 38°F
- Stainless steel or combination stainless/white vinyl exterior
- Exterior custom colors/graphics available as an upcharge (consult factory)
- Reinforced, 300 series stainless steel interior floor
- Interior - attractive, NSF approved, white aluminum (300 series stainless steel available as an upcharge)
- Digital thermometer standard for easy visibility
- Easy-roll, all swivel 4" diameter castors (front castors lock in place)
- Locks standard
- Heavy duty floor rack standard
- Convenient clean out drain standard
- Door support bumpers
- Dual sided models offer convenient, efficient access to refrigerated product
- "Hold open" flip-up top feature, standard
- Self-service doors feature convenient drop front and flip-up top
- Self-contained system
- Available with optional corner bumpers
- Remote units available



TMC-49-S

#### MILK COOLERS

(White Aluminum Interior/White Vinyl & Stainless Steel Exterior)

Model	Doors	Cu. Crate Floor			Amps	Wt.	L	D†	H*
		Ft.	Cap.	Racks					
TMC-34	2	13.8	8	2	1/3	8.3	34"	33 3/8"	41 1/2"
TMC-49	2	20.9	12	3	1/3	8.2	49"	33 3/8"	41 1/2"
TMC-58	2	24.5	16	3	1/3	9.1	58"	33 3/8"	41 1/2"

#### DUAL SIDED

TMC-49-DS	4	20.9	12	3	1/2	9.3	49"	33 3/8"	41 1/8"
TMC-58-DS	4	24.5	16	3	1/2	10.4	58"	33 3/8"	41 1/8"

(WHITE ALUMINUM INTERIOR/STAINLESS STEEL EXTERIOR)

TMC-34-S	2	13.8	8	2	1/3	8.3	34"	33 3/8"	41 1/2"
TMC-49-S	2	20.9	12	3	1/3	8.2	49"	33 3/8"	41 1/2"
TMC-58-S	2	24.5	16	3	1/3	9.1	58"	33 3/8"	41 1/2"

#### DUAL SIDED

TMC-49-S-DS	4	20.9	12	3	1/2	9.3	49"	33 3/8"	41 1/8"
TMC-58-S-DS	4	24.5	16	3	1/2	10.4	58"	33 3/8"	41 1/8"

(STAINLESS STEEL INTERIOR/WHITE VINYL & STAINLESS STEEL EXTERIOR)

TMC-34-SS	2	13.8	8	2	1/3	8.3	34"	33 3/8"	41 1/2"
TMC-49-SS	2	20.9	12	3	1/3	8.2	49"	33 3/8"	41 1/2"
TMC-58-SS	2	24.5	16	3	1/3	9.1	58"	33 3/8"	41 1/2"

#### DUAL SIDED

TMC-49-SS-DS	4	20.9	12	3	1/2	9.3	49"	33 3/8"	41 1/8"
TMC-58-SS-DS	4	24.5	16	3	1/2	10.4	58"	33 3/8"	41 1/8"

(STAINLESS STEEL INTERIOR/STAINLESS STEEL EXTERIOR)

TMC-34-S-SS	2	13.8	8	2	1/3	8.3	34"	33 3/8"	41 1/2"
TMC-49-S-SS	2	20.9	12	3	1/3	8.2	49"	33 3/8"	41 1/2"
TMC-58-S-SS	2	24.5	16	3	1/3	9.1	58"	33 3/8"	41 1/2"

#### DUAL SIDED

TMC-49-S-DS-SS	4	20.9	12	3	1/2	9.3	49"	33 3/8"	41 1/8"
TMC-58-S-DS-SS	4	24.5	16	3	1/2	10.4	58"	33 3/8"	41 1/8"

† Depth does not include 1" for door bumpers; dual sided models have bumpers front and back

\* Height does not include additional 3/4" for castor height

## 6000XL Reach-Ins

Delfield's 6000XL Series has been revised and modernized to an entirely new standard of excellence. The new 6000XL boasts the same high standards of quality and efficiency, informed by a new breed of energy and cooling technologies. All designed exclusively for the foodservice industry.

### STANDARD FEATURES:

- Stainless steel doors and front shroud
- Aluminum sides
- Seamless, Delrite® ABS interior liner
- Top mounted refrigeration system
- High performance Delflow refrigeration, designed to maintain 36° F. to 40° F
- Ships with casters mounted from factory
- Easy to adjust epoxy shelves (three per section)
- Easy to read dial thermometer
- 10' cord and plug attached
- Concealed door hinges
- Full height doors, field rehingable
- Environmentally friendly R404a refrigerant
- One year parts and labor, 5 year compressor warranty, limited lifetime liner warranty
- Accepts 18" x 26" sheet pans
- Self closing doors with stay open feature
- Ergonomically correct, easy grip door handles



Ask your sales representative for information on available models.

## 18PTB Series Refrigerated Pizza Prep Tables

You need a production center that keeps your costs low, productivity high and delivers a quality product. Delfield's pizza prep tables meet those needs with an integrated production center that promotes efficiency and production quality. In addition to our standard features, we provide a wide offering of options that allow you to configure your pizza prep table to meet your specific needs.

### STANDARD FEATURES:

- Top, sides and ends are constructed of 18-gauge stainless steel
- Units are mechanically cooled with diestamped openings to accommodate 12" x 20" hotel pans or fractional pans
- Pans and adapter bars by others
- Pans are recessed 2" to provide proper cooling for NSF 7
- High density polyurethane foam throughout unit
- Dart style quick change gaskets
- Stainless steel removable hinged covers
- On/off switch and rail on/off is located behind the louver
- Front louver is hinged for access to condensing unit and allow adequate air flow back of the unit
- 8' long electrical cord
- Environmentally friendly HFC-404A refrigerant
- One year parts and 90 day labor standard warranty



## 4400 Series Refrigerated Prep Tables

Our 4400 series prep tables provide an integrated design solution to your salad, sandwich and other meal preparation needs. Designed to be easy to work from, they provide a compact area where storage and assembly areas are combined to create an efficient production system. Labor productivity is high. Operational costs are low. Food is kept at safe, consistent temperatures, keeping your meal quality high and your food waste costs low.

### STANDARD FEATURES:

- Patented air screen ensures product stays cold without drying it out
- 100% front breathing, which allows the unit to be pushed against a wall or built into a cabinet or an existing line up
- Durable, rugged stainless steel sides, top and front
- Features Delfield's exclusive ABS interior (on sides) and is backed by a limited lifetime warranty
- Delfield supplies 1/2 size pans and adapter bars for top opening
- Salad top refrigerators are standard with 10" wide, dishwasher safe polyethylene cutting board treated with antimicrobial agent
- Environmentally friendly R404A refrigerant
- High density foamed in place polyurethane keeps energy costs low
- Black recessed quick grip handle
- Standard on 2" casters for easy cleaning and installation
- 7' cord and plug supplied
- Cord spring relief - prevents cord rollover
- One epoxy coated wire shelf standard, installed per door section
- ACT solid state electronic control
- One year parts and 90 day labor standard warranty



## Reach-Ins, Freezers & Merchandisers



SHOWN WITH  
OPTIONAL PAN  
SLIDE KIT

### Glass Door Reach-In

- White textured steel exterior
- Tested and approved for storage of open food containers
- Energy efficient double-pane, tempered glass door with low-E coating
- Specify Right or Left hinge
- Efficient, warm-walled condenser keeps the cabinet exterior dry and the glass door clear
- Fully-contained, hermetically-sealed refrigeration system with environmentally friendly 134A refrigerant
- Quiet, bottom-mounted 1/3 hp. compressor
- 4 casters included, 2 lockable
- Adjustable temperature control
- Three adjustable, epoxy-coated shelves and bottom shelf trivet
- Made in USA – Full warranty: 5 years on compressor, 1 year parts and labor
- 22 cu. ft., 32" w. x 29 1/2" d. x 75" h.



### Solid Door Reach-Ins

- White textured steel exterior
- 2 1/2" of wall insulation
- Field reversible, lockable door – shipped with right hand opening
- Efficient, warm-walled condenser keeps the cabinet exterior dry
- Quiet, bottom-mounted compressor
- Environmentally friendly 134A refrigerant
- Three adjustable, epoxy-coated shelves and bottom shelf trivet
- Adjustable temperature control
- Fully-contained, hermetically-sealed refrigeration system
- Frost free
- 4 heavy duty NSF casters, 2 with brakes
- Made in USA – Full warranty: 5 years on compressor, 1 year parts and labor
- 22 cu. ft., 32" w. x 29 1/2" d. x 75" h.



GDR22CWR OR L



### REFRIGERATOR FREEZER

R22CW 1/4 hp. F22CW 1/3 hp.

### Commercial Chest Freezers

- White, poly-coated steel interior is bright, durable and easy to clean
- One epoxy-coated wire basket comes with all models – extra baskets available
- Environmentally friendly 134A refrigerant
- Convenient temperature control, 7 settings adjustments
- White, textured steel exterior instead of stainless, cuts costs and fingerprints
- Four, easy-to-install, heavy duty casters standard
- Heavy-duty pop-out key lock standard for safety and security – key automatically ejects to prevent being left in the lock
- Tested and certified to ANSI/NSF Standard 7 for pre-packaged food storage – even ice cream – because freezers will deliver temps down to -18°F • Freezers come with NSF certified thermometer • 2 1/2" of wall insulation • Simple, manual defrost
- Made in USA – comes with full warranty: 5 years on compressor, 1 year parts and labor



1/6 HP., 21.75" D. X 36.9" H.

	WIDTH	CU. FT.
CF05	27"	5.0
CF07	35"	7.2
CF09	41"	8.8
216710100	Extra Basket for above	

1/3 HP., 27.5" D. X 36.9" H.

	WIDTH	CU. FT.
CF13	42.75"	12.8
CF15	48.0"	14.8
CF20	61.25"	19.8
216710200	Extra Basket for above	

CF13



ST07G

### Commercial Glass Top Merchandisers

- White textured-steel exterior and poly-coated steel interior
- Convenient temperature control with 7 setting adjustments
- Environmentally 134A refrigerant
- Four easy-to-install heavy-duty casters are standard
- Tempered glass sliding doors are safe and tough • ANSI/NSF Standard 7 for pre-packaged food storage
- Sliding glass doors have standard heavy-duty metal locks
- Quiet, energy-efficient operation
- Simple, manual defrost
- One epoxy-coated wire basket comes with all models (extra baskets available – 216657300 for ST05G, ST07G & ST09G, 216506100 for ST13G, ST15G & ST20G)

OA DIMENSIONS	CU. FT.	BASKETS (NOT INCLUDED)	
		PER UNIT	HP
ST05G 28" w. x 22.5" d. x 36.5" h.	5.0	2	1/4
ST07G 36" w. x 22.5" d. x 36.5" h.	7.2	3	1/4
ST09G 42" w. x 22.5" d. x 36.5" h.	8.8	4	1/4
ST13G 43.75" w. x 28.5" d. x 36.7" h.	12.8	4	1/2
ST15G 49" w. x 28.5" d. x 36.7" h.	14.8	5	1/2
ST20G 62.25" w. x 28.5" d. x 36.7" h.	19.7	7	1/2



## Randell Prep Tables

Randell offers a wide range of proven solutions that enable customers to efficiently prepare, refrigerate, and/or safely hold food. Ranging from Cold-wall design for heavy duty users to the Air-over design for more economical users, Randell Prep tables are engineered to offer customers more flexibility, superior air circulation, space and energy savings, and ease of use.

### STANDARD FEATURES:

- Expansion valve refrigeration system
- Self closing doors with press-fit magnetic gaskets
- Broad range of door sizes & modules
- High impact ABS door liners
- Interchangeable drawer cartridge system
- Superior louver design for easier accessibility and clean-ability
- Mullion coils on all side-mount compressor units
- Heavy duty fully extensible robust drawer cartridge system
- In-house UL/NSF approved testing lab
- Unlimited levels of customization and combinations available



### VARIETY OF ACCESSORIES TO CHOOSE FROM:

- Top Configuration (9000K Series Only)
- Doors and Drawers
- Overshelves
- Counter Protectors (9000K Series Only)
- Finished Backs
- Cutting Boards, Wire Racks
- Removable Tray Racks
- Additional Shelves
- Legs or 6" Casters
- Pull-out Catch Pan Assemblies (8000N Series Only)
- Export Voltages

### 8000N RAISED RAIL PREP TABLES

- Exclusive rail thermostat minimizes freezing
- Increased energy savings with separate refrigeration controls for base and rail
- Recessed wrapped cold-wall rail
- Exclusive rail drain for easy clean-up
- Side-mount compressor
- 6" casters
- 33" d. x 42.9" h.

	LENGTH	DOORS	CU. FT.	1/6 PAN CAP.	HP
<b>8148N</b>	48" l.	1	9.0	12	1/8
<b>8260N</b>	60" l.	2	14.67	16	1/8
<b>8268N</b>	68" l.	2	17.76	18	1/8
<b>8383N</b>	83" l.	3	23.55	20	1/2
<b>8395N</b>	95" l.	3	28.18	24	1/2
<b>84111N</b>	111" l.	4	32.81	28	3/8

### 9000K SERIES SALAD TOP REFRIGERATORS

- Designed for the high volume user
- 33" d. x 34.9" h.

	LENGTH	DOORS	CU. FT.	1/6 PAN CAP.	HP
<b>9030K-7</b>	48" l.	2	10.04	18	1/8
<b>9040K-7</b>	60" l.	2	14.67	24	1/8
<b>9045K-7</b>	72" l.	2	19.30	30	3/8
<b>9050K-7</b>	84" l.	3	23.93	30	3/8

## FX Series

### Refrigerator/Freezer Systems

- Patented indrawer cooling system directs 100% of the cooling inside the insulated and removable drawer Insert
- Refrigeration system operates only when the drawer is closed
- Full extension, full product view, drawer system
- High impact ABS plastic removable insulated drawer insert
- Electronic temperature controller that can be easily adjusted between -4°F (freezer) operation up to 40°F (refrigerator).
- Cabinet exterior and interior are high grade stainless steel
- 115V



### WITH UNFINISHED TOP

**FX-1** 1 Drawer, 3.0 cu. ft., 46"w. x 28.6"d. x 16.4"h.

### WITH COOKING EQUIPMENT FINISHED TOP

**FX-1CS** 1 Drawer, 3.0 cu. ft., 48"w. x 33"d. x 22"h. (w/3.5" casters)

**FX-2CS** 2 Drawers, 6.0 cu. ft., 96"w. x 33"d. x 22"h. (w/3.5" casters)

### WITH FINISHED TOP

**FX-2WS** 2 Drawers, 6.0 cu. ft., 96"w. x 29.6"d. x 37.2"h. (w/3.5" casters)

**FX-3WS** 3 Drawers, 9.0 cu. ft., 96"w. x 29.1"d. x 53.7"h. (w/3.5" casters)



## RanSpec Chef Tables

Randell Chef Tables can be designed using hundreds of standard component driven designs at nearly unlimited sizes to provide a unique product specific to the building space, operator preferences or menu variations, all with time-proven and regulatory tested products. Competitive custom tables require part replacement by a sheet metal fabricator or from-scratch part manufacturing.



## Reach-Ins & Prep Tables

### Reach-Ins

**COOLER, QUIETER, CUTS ENERGY COSTS TOO.**

**STANDARD FEATURES:**

- Lifetime warranty on all handles, hinges & door liners
- Energy Star list
- Complete with casters, locks and 3 shelves/sections
- **VR** models have stainless steel fronts with aluminum ends & interior; **VSR** models have stainless steel fronts, sides and interior
- Two year parts and labor warranty standard
- Optional half doors, pan slides legs or digital thermometer



VR-2



	# OF DOORS	DIMENSIONS (W X D X H)	CAPACITY (CU. FT.)	AMPS	VOLTS	HP
<b>REFRIGERATORS</b>						
<b>VR-1</b>	1	26½" x 33¼" x 83½"	21.0	5.5	115/60/1	¼
<b>VR-2</b>	2	52½" x 33¼" x 83½"	45.4	8.2	115/60/1	½
<b>VR-3</b>	3	77¾" x 33¼" x 83½"	69.0	10.6	115/60/1	¾
<b>FREEZERS</b>						
<b>VF-1</b>	1	26½" x 33¼" x 83½"	21.0	8.5	115/60/1	¼
<b>VF-2</b>	2	52½" x 33¼" x 83½"	45.4	12.0	115/60/1	½
<b>VF-3</b>	3	77¾" x 33¼" x 83½"	69.0	12.9	208-230/60/1	¾
<b>REFRIGERATORS</b>						
<b>VSR-1</b>	1	26½" x 33¼" x 83½"	21.0	5.5	115/60/1	¼
<b>VSR-2</b>	2	52½" x 33¼" x 83½"	45.4	8.2	115/60/1	½
<b>VSR-3</b>	3	77¾" x 33½" x 83½"	69.0	10.6	115/60/1	¾
<b>FREEZERS</b>						
<b>VSF-1</b>	1	26½" x 33¼" x 83½"	21.0	8.5	115/60/1	¼
<b>VSF-2</b>	2	52½" x 33¼" x 83½"	45.4	12.0	115/60/1	½
<b>VSF-3</b>	3	77¾" x 33¼" x 83½"	69.0	12.9	208-230/60/1	¾

### Pizza Prep Tables

**GET READY FOR THE WEEKEND RUSH!**

**STANDARD FEATURES:**

- More capacity – accepts 4" and 6" deep pans
- Easy to use & clean S/S top, front & lids
- 3" heavy-duty, swivel casters are standard
- Safe – exceeds NSF 7, 41° requirements
- Large, 18" reversible work surface
- Self-closing doors with 110° stay-open feature for easy loading
- All units 115/60/1
- Two year parts and labor warranty standard

**OPTIONAL FEATURES:**

- Flour filter
- Stainless steel back
- Pan slides
- Overshelves
- Garnish racks



VPT-88

	# OF DOORS	DIMENSIONS (W X D X H)	CAPACITY (CU. FT.)	# OF SHELVES	AMPS	HP
<b>REFRIGERATORS</b>						
<b>VPT-46</b>	1	46" x 34½" x 44"	11.0	2	4.7	¼
<b>VPT-65</b>	2	65½" x 34½" x 44"	19.7	4	7.8	½
<b>VPT-88</b>	3	88¾" x 34½" x 44"	35.5	6	9.4	¾+
<b>VPT-119</b>	4	119" x 34½" x 44"	48.7	8	10	¾

### Big Top Salad/Sandwich Refrigerators

**BIG TOP + BIG PERFORMANCE = BIG VALUE**

**STANDARD FEATURES:**

- Up to 50% more pan capacity than standard units
- Rugged, easy-to-clean stainless steel exterior and interior floor
- Removable insulated stainless steel telescoping lids
- Front breathing design for zero clearance in rear
- Self-closing door with easy-to-replace one-piece gasket
- Door hardware and liner have lifetime guarantee
- All units 115V
- Two year parts and labor warranty standard

**OPTIONAL FEATURES:**

- Single or double overshelves
- Stainless steel back
- Door mounted thermometer
- Cylinder locks



VUR-5-24BT

	DIMENSIONS (W X D X H)	# OF SHELVES	1/6 SIZE PANS	AMPS	HP	SHIP WT.
<b>VUR-3-BT</b>	27½" x 36" x 45½"	2	12	4.8	¼	230
<b>VUR-4-12BT</b>	48" x 36" x 45½"	4	12	4.8	½	280
<b>VUR-4-18BT</b>	48" x 36" x 45½"	4	18	4.8	½	275
<b>VUR-5-18BT</b>	60" x 36" x 45½"	4	18	8.8	¾	375
<b>VUR-5-24BT</b>	60" x 36" x 45½"	4	24	8.8	¾	380
<b>VUR-6-24BT</b>	72" x 36" x 45½"	6	24	8.8	¾	460
<b>VUR-6-30BT</b>	72" x 36" x 45½"	6	30	8.8	¾	450



Refrigeration at its best.



## Compact Undercounter Refrigerators and Freezers

WHO SAID GREAT THINGS DON'T COME IN SMALL PACKAGES?

### STANDARD FEATURES:

- Stainless steel front, door, top and ends
- High-impact one-piece ABS interior liner
- Energy saving high-density foamed-in-place insulation
- Cord and plug attached
- Completely enclosed cabinet back
- Two year parts and labor warranty standard

### SALAD/SANDWICH MODELS FEATURE:

- Recessed food pans
- Meets touch new NSF 41° code
- Removable telescoping covers
- Oversized 12" reversible cutting boards
- 4" deep insert pans
- Drawer models include a 12" x 20" x 6" stainless steel pan for each drawer

### OPTIONAL FEATURES & ACCESSORIES:

- 3" diameter heavy-duty swivel casters with brakes
- Additional epoxy coated wire shelves



UR-27-SAL

	DIMENSIONS (W X D X H)	CAPACITY (CU. FT.)	# OF SHELVES	1/6 SIZE PANS	AMPS REQUIRED	HP
UR-27-SAL	27" x 34" x 42 1/4"	7.0	2	6 (+2-1/2)	5.7	1/8
UR-48-8	48" x 34" x 42 1/4"	12.5	4	8	6.7	1/8
UR-48-10	48" x 34" x 42 1/4"	12.5	4	10	6.7	1/8
UR-48-12	48" x 34" x 42 1/4"	12.5	4	12	6.7	1/8

HACCP GUIDELINES STATE THAT FOOD MUST BE COOLED TO BELOW 41°F. WITHIN 6 HOURS OR LESS AFTER COOKING OR HOT HOLDING.

- When cooling large pieces or batches of hot food, begin by cutting large items into smaller pieces or dividing large batches in several smaller ones
- Thick foods, such as chili and stew, should be in pans with a product depth no more than two inches - thinner liquids, such as broth and soup, may be in pans with a product depth no more than three inches
- Our chillers chill food within 2 hours or less!
- Our shock freezers freeze products to 0°F. within 4 hours or less!
- We exceed HACCP guidelines for food safety!



Refrigeration at its best.



## Blast Chillers

WE'VE MADE BLAST CHILLING AS EASY AS 1, 2, 3!



- User friendly 1, 2, 3 Control Panel that allows chilling to terminate through preset times or temperature probes. This assures consistent use and proper operation
- Control panel printer is standard on all models except VBC-35
- All models feature stainless steel: interior and exterior, flush mounted doors, anti-condensation heaters and removable magnetic door gaskets
- Reach in models feature heavy duty swivel casters
- VBC-35, 70, and 75 voltage: 208/60/1
- VBC-100 voltage: 208/60/3
- Two year parts and labor warranty standard



VBC-35



VBC-100

	DIMENSIONS (W X D X H)	CAPACITY (LB.)	PAN CAPACITY	AMPS REQUIRED	HP
VBC-35	28" x 32" x 35"	35+	5	7	3/4
VBC-70	57" x 34" x 33 1/2"	70+	7	15	3/4
VBC-75	35 1/2" x 36" x 77 1/2"	75+	12	15	1 1/2
VBC-100	43 3/8" x 40 5/8" x 81"	100+	12	8.6	2

## Reach-Ins



### High Quality G Series Reach-Ins

#### ONE, TWO & THREE SECTION REFRIGERATORS, FREEZERS & HINGED GLASS MODELS

- Corrosion-resistant anodized aluminum sides & interior
- Reliable, energy efficient and durable with large storage capacities
- High quality stainless steel exterior front & doors (solid door models only)
- Full or half length doors with cylinder locks
- Easy-to-use microprocessor control with LED temperature display
- Balanced refrigeration systems using either R-134a or R-404A refrigerant
- 21 1/8" wide clear door openings to accept 18" x 26" pans
- Three epoxy coated shelves per section, installed at the factory
- Sturdy, self-closing doors with a stay open feature
- Gasket protecting anodized aluminum door liner
- One-piece stainless steel lift-up louver assembly
- Easy-to-clean, snap-in, vinyl magnetic door gaskets
- Incandescent lights with concealed switch (solid door models only)
- Anti-condensate door perimeter heaters
- Automatic, non-electric condensate removal
- Set of four (4) 6" high casters
- Cord & plug attached



### Microprocessor Controls

#### CONTROL FEATURES

- 3-Digit LED display (both °F & °C)
- Water resistant housing
- High/low temperature, door open, clean condenser and power loss alarms
- Communications capable and NDP compliant
- Visual defrost notification/defrost lockouts

#### VALUE-ADDED BENEFITS

- Precise temperature control equates to:
  - 1 - Maximized food shelf life
  - 2 - More energy efficient operation
- Greater reliability reduces lifetime service cost
- Communications ability: if ever needed it won't require expensive modification or replacement



### Spec Line Reach-Ins

#### ONE, TWO & THREE SECTION REACH-INS, PASS-THRUS, ROLL-INS & ROLL-THRU CABINETS

R & A Series refrigerators are distinguished by their exclusive INTELA-TRAUL® microprocessor for precise temperature control, their proprietary air-flow system, and NAFEM Data Protocol compliant communication technology.

- Balanced energy efficient system
- "Load Sure" guard prevents improper loading
- User-friendly/labor saving design features
- Accommodates 18" x 26" sheet pans
- A variety of sizes to choose from
- Self contained or remote
- Value added warranties

R SERIES: Stainless Exterior/Interior

A SERIES: Stainless Exterior/anodized aluminum interior



## Salad/Sandwich Prep Tables

- Meets NSF 7 standards
- Stainless steel exterior top, sides & doors
- Anodized aluminum interior
- Front breathing self-contained refrigeration system
- Environmentally friendly R-134a refrigerant
- Top cut-outs to accommodate 1/2 size pans
- Full compliment of plastic 1/2 size pans provided
- Removable stainless steel Insulated pan cover & pivoting front lid
- Reversible full length nylon cutting board
- Self-closing stainless steel doors with stay open feature at 105°
- Horizontal work flow door handles
- Anodized aluminum Interior door liners
- Interior mounted thermometer
- Two (2) powder coated shelves per door, mounted on pilasters
- Automatic non-electric condensate evaporator
- Magnetic snap-in door gaskets
- 8' cord & plug attached
- Set of four (4) 6" high adjustable legs



**Traulsen**



## Full Size Pizza Prep Tables

- VPS® (Venturi Plemun System) cold wall system meets NSF 7 standards in a warm kitchen with top open without ever freezing product for 6 hours or more!
- High quality stainless steel exterior construction, including: work surface, rail & covers, front, sides and louvers
- Removable front apron (provides for ease of installation)
- Durable covered stainless steel interior
- Jumbo 20" front to back raised ingredient rail
- Digital thermometer (mounted above louvers)
- Stainless steel sliding rail covers
- Accommodates industry standard full size pans without the use of adapter bars (pans provided by others)
- Self-closing stainless steel doors
- Magnetic snap-in door gaskets for tight door seal
- One (1) powder coated shelf per door, mounted on shelf pins - removable without the use of tools
- Automatic non-electric condensate evaporator
- CFC free R-404A refrigerant
- Dual LCD thermometers (mounted above louvers)
- Interior mounted light fixture(s)
- Set of 6 1/4" high heavy duty casters - two with brakes
- Cord & Plug Attached



## Merchandisers

### Glass Door Merchandisers

#### Features / Benefits

- Oversized environmentally friendly (134A) refrigeration - holds 33°F to 38°F
- Exterior - durable and permanent non-peel or chip white laminated vinyl (wine merchandiser standard in black vinyl exterior; slide door models standard in rosewood)
- Interior - attractive, NSF approved, white aluminum with 300 series stainless steel floor with convenient clean-out drain (wine merchandiser features black aluminum interior)
- Energy efficient, "Low-E", thermal glass doors
- Foamed-in-place polyurethane high density cell insulation (CFC Free)
- Safety shielded fluorescent interior lighting for longer, brighter, shadow-free illumination
- Adjustable, heavy duty, PVC coated wire shelves - 10 mil thick, pure grade vinyl coating. (Wine Merchandisers standard with 4 wine racks and 1 wire shelf per door)
- Positive seal self-closing doors
- Illuminated sign panel included (decal on GDM-10, GDM-10RF, GDM-10PT, GDM-12 & GDM-12RF)
- Bottom mount compressor

- Energy efficient
- Self-contained system, no plumbing required
- Available with optional legs or 2 1/2" diameter castors (GDM-10, GDM-10RF, GDM-10PT, GDM-12 & GDM-12RF available with optional 2 1/2" diameter castors only)
- Ask your sales representative for the latest color & sign offerings available
- Remote units available (not all models)

#### Swing Door Units Have...

- Integrated door light (IDL) standard on swing door models (excludes GDM-10, GDM-10PT & GDM-12)
- Extruded, aluminum door frames

#### Radius Front Units Have...

- Integrated door light (IDL) standard. (excludes GDM-14RF & GDM-35SL-RF)
- GDM-14RF standard with 5/16" diameter appliance rollers

#### Wine Merchandiser Units Have...

- Standard with mirrored back
- Standard with lock on 23W & 23W-RF

#### Bottom Mounted Units Have...


- A "no-stoop", lower shelf
- Allows for top storage
- Compressor can be serviced easily, and accessed by a single repairman



GDM-10



GDM-33

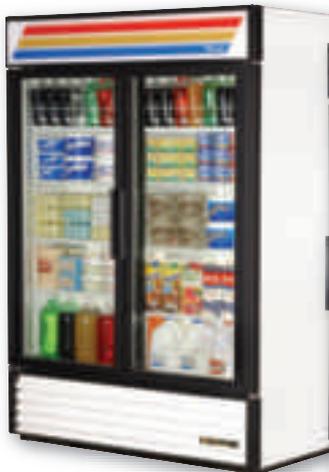

GDM-49



GDM-23W-RF

### GLASS DOOR REFRIGERATORS (SWING DOOR)

Model	Doors	Cu. Ft.	# of Shelves	HP	Amps	Crated Wt.	L	D†	H
<b>SWING DOOR (STANDARD IN WHITE VINYL)</b>									
GDM-10	1	10	3	1/5	5.0	205	24 7/8"	23"	54"
GDM-10PT	1 fr/1 bk	10	3	1/3	7.3	255	24 7/8"	25 5/8"	54"
GDM-12	1	12	3	1/5	5.0	220	24 7/8"	23"	62 3/8"
GDM-19	1	19	4	1/3	8.1	265	27"	24 1/2"	74 1/2"
GDM-23	1	23	4	1/3	7.2	315	27"	29 1/2"	78 1/4"
GDM-26	1	26	4	1/3	7.2	325	30"	29 1/2"	78 1/4"
GDM-35	2	35	8	1/2	9.2	410	39 1/2"	29 1/2"	78 1/4"
GDM-49	2	49	8	1/2	10.6	490	54"	29 1/2"	78 1/4"
GDM-49RL*	2 fr/2 bk	49	8	1/2	10.6	595	54 1/4"	32"	78 1/4"
GDM-72	3	72	12	1/2	12.0	680	78 1/4"	29 1/2"	79 1/4"

### WINE MERCHANDISER

#### (STANDARD BLACK VINYL, MIRRORED BACK AND LOCKS)

GDM-23W	1	23	5	1/3	7.2	305	27"	29 1/2"	78 1/4"
---------	---	----	---	-----	-----	-----	-----	---------	---------

### GLASS DOOR REFRIGERATORS (SLIDE DOOR)

#### SLIDE DOOR (STANDARD IN ROSEWOOD VINYL)

GDM-33	2	33	8	1/2	9.2	410	39 1/2"	29 1/2"	78 1/4"
GDM-37	2	37	8	1/2	8.9	440	43 1/2"	29 1/2"	78 1/4"
GDM-41	2	41	8	1/2	9.2	445	47"	29 1/2"	78 1/4"
GDM-41SL	2	33	8	1/3	8.8	395	47"	23 1/2"	78 1/4"
GDM-45	2	45	8	1/2	10.2	490	51"	29 1/2"	78 1/4"
GDM-47	2	47	8	1/2	10.3	495	54"	29 1/2"	78 1/4"
GDM-47RL*	2 fr/2 bk	47	8	1/2	10.3	590	54 1/4"	32"	78 1/4"
GDM-61	2	61	8	1/2	11.3	585	70"	29 1/2"	79 1/4"
GDM-69	3	69	12	1/2	12.0	665	78 1/4"	29 1/2"	79 1/4"

### GLASS DOOR REFRIGERATORS - RADIUS FRONT

#### SWING DOOR (STANDARD IN WHITE VINYL)

GDM-10RF	1	10	3	1/5	5.0	205	24 7/8"	25"	54"
GDM-12RF	1	12	3	1/5	5.0	220	24 7/8"	25"	62 3/8"
GDM-14RF	2	14	3	1/3	7.9	295	30 3/8"	29 1/4"	58"
GDM-23RF	1	23	4	1/3	7.2	320	27"	31 1/4"	78 1/4"
GDM-23FC-RF	1	23	2	1/3	7.5	310	27"	31 1/4"	78 1/4"
GDM-26RF	1	26	4	1/3	7.2	325	30"	31 1/4"	78 1/4"
GDM-35RF	2	35	4	1/2	9.2	415	39 1/2"	32 3/4"	78 1/4"
GDM-35SL-RF	2	16.4	4	1/3	8.8	250	39 1/2"	24 1/4"	58"
GDM-49RF	2	49	8	1/2	10.6	495	54"	34 3/4"	78 1/4"

### WINE MERCHANDISERS

#### (STANDARD BLACK VINYL AND MIRRORED BACK)

GDM-23W-RF	1	23	5	1/3	7.2	315	27"	31 1/4"	78 1/4"
GDM-49W-RF	2	49	10	1/2	10.6	495	54 1/8"	34 3/4"	78 1/4"

Black, rosewood, and white vinyl exterior available at no extra charge

\* Doors in rear are solid/swing

† Depth does not include 1 3/8" for door handle on Swing Door Models and 3/8" for door handle on Slide Door Models

Note: Wine merchandisers standard with four wire wine racks and one wire shelf per door

## Glass Door Merchandisers

### Features / Benefits

- Exterior, durable and permanent non-peel or chip white laminated vinyl (stainless steel available on Freezer & Dual Models - extra charge)
- Interior - attractive, NSF approved, white aluminum with 300 series stainless steel floor
- Energy efficient, triple pane thermal insulated glass doors
- Extruded, aluminum door frames
- Foamed-in-place polyurethane high density cell insulation (CFC Free)
- Defrost system time initiated, temperature terminated
- Automatic evaporator fan motor delay during defrost cycle
- Standard backguard and floor rack improve airflow (excluding GDM-7F & GDM 5F-PT, only on freezer side of GDM-49DT)
- Bottom mount heavy duty compressor, easy access to service
- Safety shielded fluorescent interior lighting for longer, brighter, shadow-free illumination
- Adjustable, PVC coated wire shelves (not available on Ice Merchandisers)
- Available with optional legs or 2 1/2" diameter castors (legs not available on GDM-5F-PT, GDM-10F & GDM-12F; castors not available on GDM-5F-PT, GDM-7F, GDM-7F standard with 2 1/2" legs; leg levelers standard for all other models shown)
- Self-contained system, no plumbing required
- See your sales representative for the latest color & sign offerings
- Remote units available (not all models)

### Freezer Units Have...

- Oversized environmentally friendly (R404A) refrigeration system, factory sealed and prelubricated for long life
- -10°F temperature (air off evaporator coil, -20°F - an ideal -10°F for storage of frozen food and ice cream)
- Large evaporator and coil heater permit short defrost cycle
- Illuminated sign panel included (decal on GDM-7F, GDM-10F & GDM-12F)
- Upright freezer is superior to spot merchandisers in its high visibility merchandising display

### Ice Merchandisers Have...

- Oversized environmentally friendly (134A) refrigeration system, factory sealed and prelubricated for long life
- Holds 20°F to 25°F
- GDIM-26 & GDIM-49 standard with 12" basin to protect from melt-down of product
- GDIM-26NT & GDIM-49NT standard without 12" basin for additional capacity requirements (no extra charge)
- Capacity - GDIM-26 holds 61 eight pound bags; GDIM-49 holds 132 eight pound bags; GDIM-26NT holds 68 eight pound bags; GDIM-49NT holds 144 eight pound bags
- Integrated door light (IDL) standard
- Minimum wattage heater in cabinet frame and doors
- Energy efficient

### Bottom Mounted Units Have...

- Allows for top storage

### Dual Temperature Units Have...

- Oversized environmentally friendly refrigeration systems, factory sealed and prelubricated for long life
- Dual temperature for zoned refrigeration equipped with two, self-contained, independent refrigeration systems
- Left side refrigerator (134A) maintains 33°F to 38°F temperatures
- Right side freezer (R404A) maintains -10°F temperatures
- 4" CFC free insulated partition between cabinet sections ensures temperature integrity of each product zone
- Illuminated sign panel included
- Positive seal self-closing doors
- Automatic defrost system time-initiated, time-terminated in single section models; time-initiated, temperature-terminated in two section models



### GLASS DOOR FREEZERS

Model	Swing Doors	Cu. Ft.	# of Shelves	HP	Amps	Crated Wt.	L	D†	H
<b>FREEZERS (STANDARD IN WHITE VINYL)</b>									
GDM-5F-PT	2	5	2	1/2	9.4	220	24"	23 7/8"	x 37 5/8"
GDM-5F	1	5	2	1/2	9.8	210	24"	23 1/2"	x 37 5/8"
GDM-7F	1	7	3	1/2	11.1	220	24"	24 3/4"	x 39 3/4"
GDM-10F	1	10	3	1/2	8.8	290	24 7/8"	x 23"	x 56 1/4"
GDM-12F	1	12	3	1/2	9.0	300	24 7/8"	x 23 3/8"	x 65 1/8"
GDM-23F	1	23	4	3/4	13.0	430	27"	x 29 1/2"	x 78 1/4"
GDM-26F	1	26	4	3/4	13.0	460	30"	x 29 1/2"	x 78 1/4"
GDM-35F‡	2	35	8	1	9.5	540	39 1/2"	x 29 1/2"	x 78 1/4"
GDM-35SL-F	2	17.1	8	1/2	10.9	375	39 1/2"	x 23 1/4"	x 59 3/8"
GDM-43F‡	2	40.6	8	1	12.6	590	47"	x 29 1/2"	x 78 1/4"
GDM-49F‡	2	49	8	1 1/2	12.9	645	54"	x 29 1/2"	x 78 1/4"
GDM-72F‡	3	72	12	1 1/2	14.1	880	78 1/4"	x 29 1/2"	x 79 1/4"

### ICE MERCHANDISERS (STANDARD IN WHITE VINYL)

GDIM-26	1	26	1 floor rack	1/3	9.8	325	30"	x 29 1/2"	x 78 1/4"
GDIM-49	2	49	2 floor racks	1/2	10.2	500	54"	x 29 1/2"	x 78 1/4"
<b>(NO TANK MODELS)</b>									
GDIM-26NT	1	26	1 floor rack	1/3	9.8	375	30"	x 29 1/2"	x 78 1/4"
GDIM-49NT	2	49	2 floor racks	1/2	10.2	580	54"	x 29 1/2"	x 78 1/4"

### DUAL TEMPERATURE GLASS DOOR MERCHANDISER SWING DOOR (STANDARD IN WHITE VINYL)

Model	Swing Doors	Cu. Ft.	# of Shelves	HP Reg-Frzzr	Amps	Crated Wt.	L	D†	H
GDM-49DT‡	2	23 - 23	8	1/3 - 3/4	14.2	645	54"	x 29 1/2"	x 78 1/4"

Black, and rosewood vinyl exterior available at no extra charge

GDM-12F height does not include 1" for door hinge

‡Requires 115/208-230/60 Hz, single phase, 3 pole, 4 wire circuit

†Depth does not include 1 3/8" for door handle (GDM-5F-PT, has handles front and back)



GDM-26F



GDIM-49



GDM-49DT

## Merchandisers

### Specialty Glass Door Merchandisers

#### Features / Benefits

- Foamed-in-place polyurethane high density cell insulation (CFC Free)
- Energy efficient, "Low-E", thermal glass
- Available with optional legs or 2 1/2" diameter castors (excludes GEM-12, GDM-12FC & GEM-12FC)
- Extruded, aluminum door frames (on swing doors only)
- Energy efficient
- Self-contained system, no plumbing required
- Bottom mount compressor
- Positive seal self-closing doors
- See your sales representative for the latest color & sign offerings
- Remote units available

#### Glass End Units Have...

- Oversized and balanced, environmentally friendly (134A) refrigeration system, factory sealed and prelubricated for long life. Fast pull-down - holds 33°F to 38°F
- Exterior - durable and permanent non-peel or chip white laminated vinyl

- Interior - attractive, NSF approved, white aluminum with 300 series stainless steel floor with convenient clean-out drain
- Maximum product visibility with glass ends
- Safety shielded fluorescent interior lighting for longer, brighter, shadow-free illumination
- Integrated door light (IDL) standard on swing door models (excludes GEM-12)
- Adjustable, heavy duty, PVC coated wire shelves - 10 mil thick, pure grade vinyl coating
- Illuminated, 4-color process sign panel included (except on GEM-12 decal standard)

#### Four Sided Glass End Units Have...

- G4SM: attractive, high luster, copper aluminum finish, combines with black trim and black wire shelves for a sophisticated presentation, Elegant sign panel provides the high-visibility difference for high profit
- Oversized and balanced, environmentally friendly (134A) refrigeration system, factory sealed and prelubricated for long life. Fast pull-down to maintain middle 30° temperatures

- Exterior - copper aluminum finish offers a fingerprint-free and easy to clean surface
- Interior - attractive, NSF approved, white aluminum with 300 series stainless steel floor with convenient cleanout drain
- Maximum product visibility with glass ends
- Safety shielded fluorescent interior lighting for longer, brighter, shadow-free illumination

- Adjustable, heavy duty, PVC coated wire shelves - 10 mil thick, pure grade black vinyl coating (excluding RGS series)
- Dynamic 360° merchandising display with new attention commanding revolving glass shelves (RGS series)
- Low air velocity

#### Floral Case Units Have...

- Oversized environmentally friendly (134A) refrigeration system has been designed to hold 35°F
- Exterior durable and permanent non-peel or chip black laminated vinyl (white, and rosewood vinyl available at no extra charge), G4SM model standard in copper aluminum finish
- Interior - attractive NSF approved, black vinyl coated aluminum for vivid contrast and dramatic display of flowers, Non peel or chip interior - will last a lifetime, 300 series stainless steel floor
- Baffled airflow - blossom supporting, correct temperature and humidity for longer shelf life of fresh flowers
- Interior Agro lighting designed for flowers to prevent browning
- Illuminated sign panel (decal on 12FC models)
- Mirrored interior backs available
- Adjustable, heavy duty, black PVC coated wire shelves

#### Bottom Mounted Units Have...

- A "no-stoop", lower shelf
- Allows for top storage
- Compressor can be serviced easily, and accessed by a single repairman

#### GLASS END MERCHANDISERS

Model	Doors	Cu. Ft.	# of Shelves	HP	Amps	Crated Wt.	L	D†	H
<b>(STANDARD IN WHITE VINYL)</b>									
GEM-12	1 swing	12	3	1/5	5.0	260	24 7/8"	x 23"	x 62 3/8"
GEM-23	1 swing	23	4	1/3	7.2	375	27"	x 29 1/2"	x 78 1/4"
GEM-47	2 slide	47	8	1/2	10.3	560	54"	x 29 1/2"	x 78 1/4"
GEM-69	3 slide	69	12	1/2	12.0	704	78 1/4"	x 29 1/2"	x 79 1/4"
GEM-72	3 swing	72	12	1/2	12.0	755	78 1/4"	x 29 1/2"	x 79 1/4"

Rosewood, and black vinyl exterior available at no extra charge (not available in stainless steel), (copper aluminum available for GEM-23 at no extra charge)

† Depth does not include 1 3/8" for door handle on swing door models or 3/8" for door handle on slide door models

#### FOUR SIDED GLASS END MERCHANDISERS

(STANDARD IN COPPER-ALUMINUM)

##### THE MARKET'S PREMIER DESSERT CASE

G4SM-23	1 swing	23	4	1/2	10.0	375	27"	x 29 3/4"	x 78 1/4"
G4SM-23RL	1 fr/1 bk	23	4	1/2	10.0	390	27"	x 32 3/4"	x 78 1/4"
G4SM-23RL-SI	1 fr/1 bk	23	4	1/2	10.0	390	27"	x 32 3/4"	x 78 1/4"
G4SM-23-PT	1 fr/1 bk	23	4	1/2	10.0	410	27"	x 33 1/2"	x 78 1/4"

(STANDARD IN COPPER-ALUMINUM)

##### ROTATING GLASS SHELF

G4SM-23-RGS	1 swing	23	6	1/2	10.8	405	27"	x 29 1/2"	x 78 1/4"
-------------	---------	----	---	-----	------	-----	-----	-----------	-----------

Rosewood, black and white vinyl exterior available at no extra charge (not available in stainless steel)

† Depth does not include 1 3/8" for door handles (rear load and pass thru's have handles front and back)

Note: G4SM-23RGS has 5 glass shelves and 1 mirrored shelf (positioned on bottom)

#### FLORAL CASES

(STANDARD IN BLACK VINYL-EXTERIOR AND INTERIOR)

##### FLORAL CASES

GDM-12FC	1 swing	12	2	1/5	5.0	233	24 7/8"	x 23"	x 62 3/8"
GDM-23FC	1 swing	23	2	1/3	7.2	295	27"	x 29 1/2"	x 78 1/4"
GDM-23FC-RF	1 swing	23	2	1/3	7.2	310	27"	x 31 1/4"	x 78 1/4"
GDM-47FC	2 slide	47	4	1/2	10.3	480	54"	x 29 1/2"	x 78 1/4"
GDM-49FC	2 swing	49	4	1/2	10.6	465	54"	x 29 1/2"	x 78 1/4"
GDM-61FC	2 slide	61	4	1/2	11.3	594	70"	x 29 1/2"	x 79 1/4"
GDM-69FC	3 slide	69	6	1/2	12.0	625	78 1/4"	x 29 1/2"	x 79 1/4"
GDM-72FC	3 swing	72	6	1/2	12.0	625	78 1/4"	x 29 1/2"	x 79 1/4"

##### GLASS END FLORAL CASES

GEM-12FC	1 swing	12	2	1/5	5.0	250	24 7/8"	x 23"	x 62 3/8"
GEM-23FC	1 swing	23	2	1/3	7.5	350	27"	x 29 1/2"	x 78 1/4"
G4SM-23FC	1 swing	23	2	1/2	10.0	416	27"	x 29 3/4"	x 78 1/4"
GEM-47FC	2 slide	47	4	1/2	10.3	540	54"	x 29 1/2"	x 78 1/4"
GEM-69FC	3 slide	69	6	1/2	12.0	704	78 1/4"	x 29 1/2"	x 79 1/4"
GEM-72FC	3 swing	72	6	1/2	12.0	718	78 1/4"	x 29 1/2"	x 79 1/4"

White, and rosewood vinyl exteriors available at no extra charge

† Depth does not include 1 3/8" for handle on swing door models (excludes -RF model); or 3/8" for slide door models



GEM-23FC



GEM-47



G4SM-23RL

## Specialty Glass Door Merchandisers

### Features / Benefits

- Oversized environmentally friendly (134A) refrigeration - hold 33°F to 38°F
- Interior - attractive, NSF approved, white aluminum with 300 series stainless steel floor
- Energy efficient, "Low-E", thermal glass doors (excludes TCM-78AC)
- Foamed-in-place polyurethane high density cell insulation (CFC free)
- Extruded, aluminum door frames on swing doors
- Adjustable, heavy duty, PVC coated wire shelves - 10 mil thick, pure grade vinyl coating, Bin dividers for TCM-84 & TCM-78AC
- Self-contained system, no plumbing required
- Positive seal self-closing doors. (excludes TCM-84 & TCM-78AC)
- Energy efficient
- See your sales representative for the latest color & sign offerings
- Remote units available

### Convenience Store Units Have...

- Lower profile on convenience store coolers allows extra visibility throughout store - makes gondola and center store placement possible.
- Exterior - durable and permanent non-peel or chip white laminated vinyl (TCM-84 & TCM-78AC standard in black vinyl; available in white vinyl with black trim)
- Safety shielded fluorescent interior lighting for longer, brighter, shadow-free illumination
- Decal included ("True Stripe" illuminated sign panel on GDM-41SL standard). Excludes TCM-84 & TCM-78AC
- Available with optional legs or 2 1/2" diameter castors (legs not available for, TCM-84 & TCM-78AC; legs and castors not available for GDM-10, GDM-10PT)

### Counter-Top Units Have...

- Exterior - non-peel or chip white laminated vinyl, durable and permanent; or gleaming stainless steel on the food service models
- Designed for convenient access, fast service, and attractive display
- Illuminated sign panel - "True Stripe" standard (decals on GDM-7/-7-S)
- GDM-7 and GDM-7-S are standard with 2 1/2" legs; leg levelers standard for all other models shown



TCM-84

GDM-10



GDM-9

GDM-5

### CONVENIENCE STORE COOLERS

Model	Doors	Cu. Ft.	# of Shelves	HP	Amps	Crated Wt.	L	D†	H
<b>(LOWER HEIGHT &amp; STANDARD DEPTH)</b>									
<b>STANDARD IN WHITE VINYL</b>									
GDM-33C	2 slide	23	6	1/3	8.4	340	39 1/2"	x 29 1/8"	x 61 1/4"
GDM-41C	2 slide	28	6	1/2	8.2	400	47 1/8"	x 29 1/8"	x 61 3/4"
<b>(LOWER HEIGHT &amp; NARROW DEPTH)</b>									
<b>STANDARD IN WHITE VINYL</b>									
GDM-33SL-60	2 slide	14	3	1/3	8.6	270	39 1/2"	x 20 3/8"	x 60"
GDM-33SSL-54	2 slide	11	3	1/3	7.8	254	36"	x 18"	x 54"
GDM-41SL-54	2 slide	17	6	1/3	8.2	305	47"	x 21"	x 54"
GDM-41SL-60	2 slide	19	6	1/3	8.2	336	47"	x 21"	x 60"
<b>(LOWER HEIGHT, NARROW DEPTH, FAST LANE, PASS-THRU)</b>									
<b>STANDARD IN WHITE VINYL</b>									
GDM-33C-PT	2 fr/2 bk	17	3	1/2	9.7	412	39 1/2"	x 24"	x 60"
GDM-33C-PT-54	2 fr/2 bk	15	3	1/2	9.3	345	39 1/2"	x 24"	x 54"
<b>(LOWER HEIGHT - END OF AISLE MERCHANDISERS)</b>									
<b>STANDARD IN WHITE VINYL</b>									
GDM-10	1 swing	10	3	1/3	5.0	205	24 7/8"	x 23"	x 54"
GDM-10PT	1 fr/1 bk	10	3	1/3	7.3	255	24 7/8"	x 25 5/8"	x 54"
<b>(SLIDE TOP - DEEP WELL SPOT MERCHANDISER)</b>									
<b>STANDARD IN BLACK VINYL</b>									
TCM-84	2 slide	6.75	bin dividers	1/3	4.1	205	40"	x 18"	x 38 1/2"
<b>(AIR CURTAIN - DEEP WELL SPOT MERCHANDISER)</b>									
<b>STANDARD IN BLACK VINYL</b>									
TCM-78AC	N/A	6.75	bin dividers	1/3	7.8	190	40"	x 18"	x 38 1/2"

### COUNTER-TOP COOLERS

Model	Doors	Cu. Ft.	# of Shelves	HP	Amps	Crated Wt.	L	D†	H
<b>WHITE VINYL EXTERIOR</b>									
GDM-5	1	5	2	1/6	4.3	180	24"	x 23 1/2"	x 37"
GDM-5-PT*	1 fr/1 bk	5	2	1/5	5.2	205	24"	x 23 7/8"	x 37"
GDM-7*	1	7	3	1/5	4.5	185	24"	x 24 3/4"	x 39 3/4"
GDM-9	2 slide	9	3	1/5	4.1	240	36 1/8"	x 22 3/8"	x 39 1/2"
GDM-9-PT	2 fr/2 bk	7.3	2	1/3	8.2	295	36 1/8"	x 20 3/8"	x 41 5/8"
<b>STAINLESS STEEL EXTERIOR</b>									
GDM-5-S	1	5	2	1/6	4.3	170	24"	x 23 1/2"	x 37"
GDM-5-PT-S	1 fr/1 bk	5	2	1/5	5.2	195	24"	x 23 7/8"	x 37"
GDM-7-S	1	7	3	1/5	4.5	180	24"	x 24 3/4"	x 39 3/4"
GDM-9-S	2 slide	9	3	1/5	4.1	215	36 1/8"	x 22 3/8"	x 39 1/2"
GDM-9-PT-S	2 fr/2 bk	7.3	2	1/3	8.2	N/A	36 1/8"	x 20 3/8"	x 41 5/8"

Black vinyl exterior available at no extra charge

\* Freezer model available

† Depth does not include 1 3/8" for handle on swing door models (GDM-5PT, -PT-S have handles front and back); or 7/8" on slide door models

## Freezer Chests & Air Curtain Refrigerators

### Horizontal Freezers

#### Features / Benefits

- Designed to promote high-profit frozen novelties in high impulse retail traffic areas – ideal for bolstering incremental sales increases for frozen merchandise and seasonal specialties
- Oversized environmentally friendly (134A) refrigeration - holds -10°F, the ideal temperature for frozen foods and ice cream
- Exterior - non-peel or chip white laminated vinyl with black trim, durable and permanent, also available in black vinyl exterior
- Interior - attractive, NSF approved, white aluminum with 300 series stainless steel floor
- Tempered, hard coated, "Low-E" glass slide lid. Reduces solar heat gain, enhances energy efficiency and minimizes condensation
- Designed for convenient access, fast service, and attractive display
- Optional, heavy duty, PVC coated wire baskets available (THF-29FL holds 2 baskets, THF-41FL/AL holds 3 baskets, THF-51FL holds 4 baskets)
- Locks standard, provides security, prevents theft
- Interior mounted temperature monitor

- Foamed-in-place polyurethane high density cell insulation (CFC free)
- Convenient defrost drain
- 1½" dual swivel castors standard
- Self-contained system, no plumbing required
- See your sales representative for the latest color offerings
- Optional heavy duty PVC coated wire baskets available
- Manual defrost system

#### Air Curtains

##### Features / Benefits

- Oversized environmentally friendly (R404A) refrigeration - holds 33°F to 38°F, the ideal temperature for fresh salads, sandwiches, desserts and beverages
- Exterior - non-peel or chip white laminated vinyl, durable and permanent
- Interior - attractive, NSF approved, white aluminum with white shelves, 300 series stainless steel floor and deck pans (Also available in optional black aluminum interior with black shelves)
- Designed for convenient access, fast service, and attractive display
- Safety shielded fluorescent interior lighting for longer, brighter, shadow-free illumination

- Adjustable, heavy duty, PVC coated wire shelves 10 mil thick, pure grade vinyl coating
- Foamed-in-place polyurethane high density cell insulation (CFC free)
- Leg levelers standard
- Self-contained system, no plumbing required
- TAC models are designed to operate in an environment where temperature & humidity do not exceed 75°F and 55% relative humidity
- Illuminated sign panel
- See your sales representative for the latest color & sign offerings
- Units should not be installed near HVAC vents, fans or doorways that will disrupt the air curtain and compromise the function of the cabinet. Unit should not be installed in direct sunlight
- Air curtain models will run most efficiently when completely loaded with product
- Remote units available



THF-29FL

THF-41FL



GLASS LID HORIZONTAL SPOT FREEZERS							
Model	Cu. Ft.	HP	Amps	Crated Wt.	L	D	H*
<b>FLAT LID HORIZONTAL FREEZERS</b>							
THF-29FL	7.0	1/4	4.0	175	29½"	25¾"	31¾"
THF-41FL	10.9	1/3	5.6	210	41"	25¾"	31¾"
THF-51FL	13.2	1/3	6.0	250	51½"	25¾"	31¾"
<b>ANGLED LID HORIZONTAL FREEZERS</b>							
THF-41AL	9.5	1/3	5.6	205	41"	25¾"	33⅞"

\* Height includes 2½" for castors  
Black vinyl exterior available at no extra charge



TAC-48GS

TAC-48

AIR CURTAIN REFRIGERATOR								
Model	Cu. Ft.	# of Shelves	HP	Amps	Crated Wt.	L	D	H
TAC-48*	34	4	1	12.0	490	48	30⅞"	80⅝"
AIR CURTAIN GLASS SIDED REFRIGERATOR								
TAC-48GS*	34	4	1	12.0	475	48"	30¼"	80⅝"

\* Requires 208-230/60 Hz, single phase, NEMA 6-15R  
Black vinyl exterior available at no extra charge  
Stainless steel exterior available - upcharge applies  
Black Vinyl Coated interior standard w/Black shelving available - upcharge applies

## Deli Cases

### Features / Benefits

- Oversized, environmentally friendly (134A) gravity coil refrigeration system. Gravity coil provides high humidity to preserve sliced meats and deli products. Capillary metering assures constant regulation of refrigerant flow
- Refrigerator holds ideal 38°F to 40°F case temperature for fresher deli products
- Interior - attractive, NSF approved, white aluminum sides and top, 300 series stainless steel floor with coved corners, TCGG has stainless steel interior and exterior, 300 series stainless steel floor with coved corners
- Each deli is designed with energy efficient, "Low-E", thermal glass, extra large product viewing glass to maximize your cold product presentations. The Single, Counter-Height & Double-Duty also have a 13° slanted glass to minimize reflection from overhead lighting
- Fluorescent lamps are low UV emitting - red meats are enhanced in faithful color
- Foamed-in-place high density polyurethane insulation (CFC free)
- Positive seal self-closing door preserves interior humidity
- Automatic defrost time clock
- Self-contained system
- Available with optional legs or 2 1/2" or 4" diameter castors (not available for TCGG-72-S)
- Remote units available

### Single-Duty Units Have...

- Exterior - durable and permanent non-peel or chip white laminated vinyl
- Versatile and durable stainless steel top provides surface for support equipment such as registers and point-of-purchase novelties
- Exclusive front and rear interior lighting. Three product illuminating light sources for brilliant product display (TSID-72)
- Lamps are safety shielded - assures longer, brighter, shadow-free product illumination. Lighting tubes can be replaced without removing product
- Adjustable, heavy duty, wire shelves - 10 mil thick, pure grade PVC coating

### Low-Height Units Have...

- Combines efficient, high-volume merchandising with the perfect overall height for fast paced sales transactions - ideal for convenience and petroleum stores
- Refrigerator holds ideal 38°F to 40°F case temperature for fresher deli products
- Exterior - durable and permanent non-peel or chip white laminated vinyl
- Versatile and durable stainless steel top provides surface for support equipment such as registers and point-of-purchase novelties
- Exclusive front and rear interior lighting
- Lamps are safety shielded - assures longer, brighter, shadow-free product illumination. Lighting tubes can be replaced without removing product
- Adjustable, heavy duty, wire shelves - 10 mil thick, pure grade PVC coating

### Double-Duty Units Have...

- Stainless steel exterior (white laminated vinyl rear louvered grills)
- Refrigerated lower rear storage
- 115V receptacle for scales or slicers
- Exclusive front and rear interior lighting
- Adjustable upper stainless steel shelf. One level of shelving standard (extra stainless steel shelf is optional for TDBD-72's only)
- Each deli is designed with energy efficient, "Low-E", thermal product viewing glass to maximize your cold product presentations
- Space saving design

### Curved Glass Units Have...

- Oversized, environmentally friendly (134A) gravity coil refrigeration system
- Exterior - durable and permanent non-peel or chip white laminated vinyl with stainless steel top and trim (stainless steel exterior and interior available for additional charge)
- Exclusive top and shelf positioned interior lighting
- Adjustable, white heavy duty wire shelves - 10 mil thick, pure grade PVC coating
- Optional stainless steel mezzanine shelves available
- Insulated, double pane curved glass front provides extra large viewing area to maximize your cold product presentations, both panes are tempered for safety
- Central electrical connections
- Space saving design
- TCGG models are designed to operate in an environment where temperature & humidity do not exceed 75°F and 55% relative humidity
- 4 amp exterior scale receptacle



### SINGLE-DUTY DELI CASES

Model	Doors	Cu. Ft.	# of shelves	HP	Amps	Crated Wt.	L	D	H
TSID-48-2	2	16	2	1/3	7.6	425	48 1/2"	29 1/4"	50 1/4"
TSID-48-4	4	16	2	1/3	7.6	430	48 1/2"	29 1/4"	50 1/4"
TSID-72-3	3	24	2	1/2	9.4	595	72 1/2"	29 1/4"	50 1/4"
TSID-72-6	6	24	2	1/2	9.4	590	72 1/2"	29 1/4"	50 1/4"
TSID-96-3	3	32	4	1/2	9.8	775	96 1/2"	29 1/4"	50 1/4"
TSID-96-6	6	32	4	1/2	9.8	765	96 1/2"	29 1/4"	50 1/4"

### LOW-HEIGHT SINGLE-DUTY DELI CASES

Model	Doors	Cu. Ft.	# of shelves	HP	Amps	Crated Wt.	L	D	H
TSID-48-2-L	2	17	1	1/3	8.2	400	48 3/8"	32 1/8"	42"
TSID-48-4-L	4	17	1	1/3	8.2	405	48 3/8"	32 1/8"	42"
TSID-72-3-L	3	25	1	1/3	8.3	515	72 1/2"	32 1/8"	42"
TSID-72-6-L	6	25	1	1/3	8.3	560	72 1/2"	32 1/8"	42"

### DOUBLE-DUTY DELI CASES

Model	Doors	Cu. Ft.	Stainless Shelves	HP	Amps	Crated Wt.	L	D	H
TDBD-72-2	2	35	1	1/2	14.0	640	72 1/8"	35 1/8"	55"
TDBD-72-4	4	35	1	1/2	14.0	625	72 1/8"	35 1/8"	55"
TDBD-96-3	3	46	2	3/4	16.0	850	96 1/8"	35 1/8"	55"
TDBD-96-6	6	46	2	3/4	16.0	900	96 1/8"	35 1/8"	55"

### CURVED GLASS DELI CASES WHITE VINYL WITH S/S TOP & TRIM

Model	Doors	Cu. Ft.	# of Shelves	HP	Amps	Crated Wt.	L	D†	H
TCGG-48	2	23.5	2	1/3	11.8	495	48 1/4"	35 1/4"	47 3/4"
TCGG-72	2	37.1	2	3/4	16.0	685	72 1/4"	35 1/4"	47 3/4"

### CURVED GLASS DELI CASES S/S INTERIOR & EXTERIOR

TCGG-48-S	2	23.5	2	1/3	11.8	505	48 1/4"	35 1/4"	47 3/4"
TCGG-72-S	2	37.1	2	3/4	16.0	695	72 1/4"	35 1/4"	47 3/4"

† Depth does not include 3/8" for rear door handles

TSID-48-2-L



TSID-96-3



TCGG-48



## Display Cases

### Curved Glass Display Cases

#### Features / Benefits

- Exterior - standard in white laminate, five additional color options available (no charge). All laminate ships separately from unit and is field installed
- Other custom colors available, contact factory for details (upcharge applies)
- Interior - attractive, NSF approved, white vinyl coated aluminum sides and top, coved corners and high impact plastic floor (TCGD-50-CD has stainless steel interior sides and top)
- Positive seal self-closing rear sliding doors
- Versatile and durable stainless steel top provides surface for support equipment such as registers and point-of-purchase novelties
- Exclusive shelf positioned interior lighting
- Lamps are safety shielded - assures longer, brighter, shadow-free product illumination. Lighting tubes can be replaced without removing product
- Energy efficient, "Low-E", thermal glass slide rear doors
- Adjustable, heavy duty, PVC wire shelves - 10 mil thick, pure grade PVC coating, each shelf supports maximum weight of 150 lb.
- Central electrical connections
- NSF-7 certified cabinets hold open food products
- TCGR-50 & TCGD-50 cabinets hold (8) 18" x 26" pans and (4) 9" x 26" pans; TCGR-77 and TCGD-77 cabinets hold (16) 18" x 26" pans
- Remote units available

#### Refrigerated Bakery Model

- Oversized, environmentally friendly (134A) forced air refrigeration system
- Bakery cases hold ideal 33°F to 40°F case temperature for fresher bakery products
- Fluorescent lamps are low UV emitting - products are enhanced in faithful color
- Insulated, double pane curved glass front provides extra large viewing area to maximize bakery product presentations. Tilts forward for easy cleaning. Exterior pane is tempered for safety
- Self-contained system
- Vented kick plate allows front breathing
- Recessed light switch and thermostat
- Foamed-in-place high density polyurethane insulation (CFC free)
- TCGR models are designed to operate in an environment where temperature & humidity do not exceed 75°F and 55% relative humidity

#### Non-Refrigerated "DRY" Bakery Model

- Designed to provide an attractive companion to the TCGR cabinet - displays bakery products which do not require refrigeration
- Single pane curved glass front. Tilts forward for easy cleaning. Tempered for safety
- Special "brown bulb" lighting provides a balanced color spectrum that enhances the appearance of bakery products and pastries
- Recessed light switch
- Optional 12" cord set. Factory installed only (exterior scale receptacle will not be included with this option) upcharge applies

#### Cold Deli Model

- Cold Deli case holds 36°F to 38°F, ideal for meats, cheeses, and salads
- Three lighting receptacles allow for two additional "optional" lighted shelves

#### Curved Glass Dual Zone Model

- Self-contained, environmentally friendly (CFC free) 134A refrigeration system
- Refrigerated section features superior low velocity, high volume airflow design maintains 38°F to 40°F (3.3°C to 4.4°C) without drying out product. Ideally suited for delicate bakery products
- Insulated, double pane curved glass front and side panels. Provides extra large viewing area to maximize bakery product presentation. Front glass tilts forward for easy cleaning
- Six (6) adjustable, lighted, cantilevered PVC coated shelves
- Low UV emitting fluorescent lighting system
- Front and sides standard with white laminate panels, five additional color options available at no charge, stainless steel top



TCGD-50



TCGR-50



#### CURVED GLASS DISPLAY CASE - REFRIGERATED BAKERY

Model	Doors	Cu. Ft.	# of Shelves	HP	Amps	Crated Wt.	L	D	H
TCGR-50	2	27.4	3	1/2	15.2	590	50 7/8"	35 1/2"	47 7/8"
TCGR-77	2	43	3	3/4	15.5	820	77 7/8"	35 1/2"	47 7/8"

#### CURVED GLASS DISPLAY CASE - DRY BAKERY

Model	Doors	Cu. Ft.	# of Shelves	Amps	Crated Wt.	L	D	H
TCGD-50	2	23.8	3	6.0	445	50 7/8"	35 1/2"	47 7/8"
TCGD-77	2	37	3	6.4	630	77 7/8"	35 1/2"	47 7/8"

#### CURVED GLASS DISPLAY CASE - COLD DELI

Model	Doors	Cu. Ft.	# of Shelves	HP	Amps	Crated Wt.	L	D	H
TCGR-50-CD	2	27.4	1	1/2	15.2	580	50 7/8"	35 1/2"	47 7/8"

#### CURVED GLASS DISPLAY CASE - DUAL ZONE

Model	Doors	Cu. Ft.	# of Shelves	HP	Amps	Crated Wt.	L	D	H
TCGDZ-50	2	13.5/13.5	6	1/3	9.0	625	50 7/8"	35 1/2"	47 7/8"

## Direct Draw

### Features / Benefits

- Oversized environmentally friendly (134A) forced-air refrigeration system for maximum performance
- Provides ice cold products 33°F to 38°F (normal ambient conditions)
- Attractive, wear-resistant laminated heavy duty black vinyl exterior
- Heavy gauge all stainless steel countertop
- Interior - 300 series stainless steel floor with ½" lip & heavy galvanized steel walls
- Interior - NSF approved for pre-packaged and bottled goods
- 3" diameter stainless steel insulated beer columns
- Door locks - standard
- Recessed handles
- Available with optional legs or 2½" or 4" diameter castors (TDD-1/-S: 4" dia. castors standard equipment; 2½" dia. castors and legs not available)
- Each cabinet designed to accommodate all types of beer kegs
- Simple plug-in installation
- Remote units available

### Direct Draw Units Have...

- Fan motors direct large volume of cold air into draft columns
- Incandescent interior lighting (excluding TDD-1)
- Air vents on side to maximize flow of fresh air through condenser

### Club Top Units Have...

- Easy to reach refrigerated storage area for chilled beer or wine glasses
- Anodized aluminum glass rail provides convenient storage area for glasses on top
- One, 10 mil thick, heavy duty, black PVC coated wire shelf standard (glass storage area)
- Convenient easy-glide lid
- Flip-lock to secure stainless steel lid

### Stainless Steel Models

- Stainless steel exterior and countertop for those who appreciate the value of stainless

TDD-1



TDD-3CT-S



TDD-4-S



T-50-GC



## DIRECT DRAW BEER DISPENSERS

Model	½ Barrels	Doors	HP	Amps	Crated Wt.	L	D	H*
TDD-1	1	1	⅙	3.9	180	23½" x 31¼" x 39¾"		
TDD-2	2	2	⅓	8.5	305	58⅞" x 27⅞" x 37"		
TDD-3	3	2	⅓	8.5	335	69⅞" x 27⅞" x 37"		
TDD-4	4	3	⅓	8.5	415	90⅜" x 27⅞" x 37"		
<b>STAINLESS STEEL</b>								
TDD-1-S	1	1	⅙	3.9	175	23½" x 31¼" x 39¾"		
TDD-2-S	2	2	⅓	8.5	305	58⅞" x 27⅞" x 37"		
TDD-3-S	3	2	⅓	8.5	340	69⅞" x 27⅞" x 37"		
TDD-4-S	4	3	⅓	8.5	415	90⅜" x 27⅞" x 37"		

## CLUB TOP DIRECT DRAW BEER DISPENSERS

Model	½ Barrels	Doors	# of		HP	Amps	Crated Wt.	L	D	H*
			Shelves	Wt.						
TDD-2CT	2	2	1	⅓	8.5	335	58⅞" x 27⅞" x 38½"			
TDD-3CT	3	2	1	⅓	8.5	365	69⅞" x 27⅞" x 38½"			
TDD-4CT	4	3	1	⅓	8.5	435	90⅜" x 27⅞" x 38½"			
<b>STAINLESS STEEL</b>										
TDD-2CT-S	2	2	1	⅓	8.5	330	58⅞" x 27⅞" x 38½"			
TDD-3CT-S	3	2	1	⅓	8.5	355	69⅞" x 27⅞" x 38½"			
TDD-4CT-S	4	3	1	⅓	8.5	430	90⅜" x 27⅞" x 38½"			

\* Height does not include 13¾" for draft arm on Club Top Models  
Height does not include 15¼" for draft arm on Direct Draw Models

## Glass & Plate Chillers & Frosters

### Features / Benefits

- Oversized, environmentally friendly (R404A) refrigeration system
- Holds 0°F and below
- Save time - load glasses dry and frost even faster with temperature 0°F and below
- Attractive, wear-resistant laminated heavy duty black vinyl exterior
- All stainless steel countertop and lids
- Interior - long lasting heavy duty galvanized steel. NSF approved for prepackaged and bottled goods
- Largest storage capacity in the industry - meets supply and demand requirements during peak hours
- Automatic defrost system
- Foamed-in-place, high density polyurethane insulation (CFC free)
- Heavy duty PVC coated wire shelves for maximum flexibility
- Self-contained system
- Available with optional legs or 2½" or 3" diameter castors
- Available with optional ratchet locks for added security
- Remote units available

### Stainless Steel Models

- Stainless steel exterior, countertop and lids for those who appreciate the value of stainless

## GLASS & PLATE CHILLERS/FROSTERS

Model	Capacity	# of Shelves	HP	Amps	Crated Wt.	L	D†	H
	(8" Mugs / 10 oz. Steins)							
T-24-GC	90 / 85	2	¼	5.8	180	24¾" x 26⅝" x 33⅜"		
T-36-GC	180 / 172	3	⅓	6.8	225	36¾" x 26⅝" x 33⅜"		
T-50-GC	250 / 240	5	⅓	7.6	265	49⅝" x 26⅝" x 33⅜"		
<b>STAINLESS STEEL</b>								
T-24-GC-S	90 / 85	2	¼	5.8	180	24¾" x 26⅝" x 33⅜"		
T-36-GC-S	180 / 172	3	⅓	6.8	220	36¾" x 26⅝" x 33⅜"		
T-50-GC-S	250 / 240	5	⅓	7.6	265	49⅝" x 26⅝" x 33⅜"		

† Depth does not include 1" for rear bumpers

## Underbar Equipment

### Back Bar Coolers

#### Features / Benefits

- Oversized, environmentally friendly (134A) forced-air refrigeration system maintains cold 33°F to 38°F product temperatures
- Attractive, wear-resistant laminated heavy duty black vinyl exterior, except stainless steel models
- Heavy gauge all stainless steel countertop
- Interior - 300 series stainless steel floor with 1/2" lip & heavy galvanized steel walls. NSF approved for pre-packaged and bottled goods
- Versatile flat top slides easily under bar or can be used as a counter/storage space
- Recessed handles on solid door models
- 10 mil thick, heavy duty, black PVC coated wire shelving - two per door
- Foamed-in-place, high density polyurethane insulation (CFC free)
- Bright fluorescent interior lighting for excellent visibility
- Door locks - standard. (excluding TBB-2G and slide door models)
- Air vents on side to maximize flow of fresh air through condenser
- Self-contained system
- Simple plug-in installation
- Optional wine racks, wine or beer organizers available
- Available with optional legs or 2 1/2" or 4" diameter castors
- Remote units available

#### Pass Thru Model

- Designed for convenient rear loading and front access for serving

#### Glass Door Models

- Energy efficient, "Low-E", thermal glass doors
- Extruded, aluminum door frames on glass doors

#### Direct Draw Model

- 3" diameter stainless steel insulated beer columns
- Fan motors direct large volume of cold air into draft columns
- Designed to accommodate a variety of beer kegs

#### 24" Units Have...

- 24" depth makes for easy placement in tight areas. Conserves valuable work space
- TBB-24 models feature a finished stainless steel top providing an excellent work or storage area. TBB-24GAL models feature a galvanized steel top designed to slide under existing cabinetry providing a built-in look

**TBB-3G-S**  
(Shown with optional organizers)



**TBB-2G**

**TBB-24GAL-60-S**



**TDB-24-48-1-G-1**

### BACK BAR COOLERS

Model	12 oz.		Doors	Shelves	HP	Amps	Wt.	Crated			
	Cans	Barrels						L	D†	H	
<b>TBB-2</b>	134	6-packs	2	2	4	1/3	8.5	325	58 7/8"	27 1/8"	37"
<b>TBB-3</b>	161	6-packs	3	2	4	1/3	8.5	365	69 1/8"	27 1/8"	37"
<b>TBB-4</b>	209	6-packs	4	3	6	1/3	8.5	460	90 3/8"	27 1/8"	37"
<b>PASS THRU</b>											
<b>TBB-4PT</b>	193	6-packs	4	6	6	1/2	8.8	565	90 3/8"	31"	37"
<b>GLASS DOORS</b>											
<b>TBB-2G*</b>	134	6-packs	2	2	4	1/3	8.5	350	58 7/8"	27 1/2"	37"
<b>TBB-3G</b>	161	6-packs	3	2	4	1/2	9.1	410	69 1/8"	27 1/2"	37"
<b>TBB-4G</b>	209	6-packs	4	3	6	1/2	10.7	520	90 3/8"	27 1/2"	37"

### STAINLESS STEEL BACK BAR COOLERS

<b>TBB-2-S</b>	134	6-packs	2	2	4	1/3	8.5	330	58 7/8"	27 1/8"	37"
<b>TBB-3-S</b>	161	6-packs	3	2	4	1/3	8.5	370	69 1/8"	27 1/8"	37"
<b>TBB-4-S</b>	209	6-packs	4	3	6	1/3	8.5	445	90 3/8"	27 1/8"	37"
<b>PASS THRU</b>											
<b>TBB-4PT-S</b>	193	6-packs	4	6	6	1/2	8.8	540	90 3/8"	31"	37"
<b>GLASS DOORS</b>											
<b>TBB-2G-S*</b>	134	6-packs	2	2	4	1/3	8.5	345	58 7/8"	27 1/2"	37"
<b>TBB-3G-S</b>	161	6-packs	3	2	4	1/2	9.1	405	69 1/8"	27 1/2"	37"
<b>TBB-4G-S</b>	209	6-packs	4	3	6	1/2	10.7	540	90 3/8"	27 1/2"	37"

\* Unavailable with door locks

† Depth does not include 1 3/8" for door handle (glass door models)



### 24" BACK BAR COOLERS (SWING DOORS)

Model	12oz.		# of Doors	Shelves	HP	Amps	Wt.	Crated			
	Cans	Barrels						L	D†	H	
<b>TBB-24-48</b>	82	6-packs	2	4	1/3	7.0	270	49 1/8"	23 7/8"	35 5/8"	
<b>TBB-24GAL-48</b>	82	6-packs	2	4	1/3	7.0	265	47 1/8"	23 3/4"	34 1/4"	
<b>TBB-24-60</b>	133	6-packs	2	4	1/3	7.0	315	61 1/8"	23 7/8"	35 5/8"	
<b>TBB-24GAL-60</b>	133	6-packs	2	4	1/3	7.0	310	59 7/8"	23 3/4"	34 1/4"	
<b>TBB-24-72</b>	150	6-packs	3	6	1/3	7.5	375	73 1/8"	23 7/8"	35 5/8"	
<b>GLASS DOOR</b>											
<b>TBB-24-48G</b>	82	6-packs	2	4	1/3	7.6	275	49 1/8"	24 1/4"	35 5/8"	
<b>TBB-24GAL-48G</b>	82	6-packs	2	4	1/3	7.6	275	47 1/8"	24 1/4"	34 1/4"	
<b>TBB-24-60G</b>	133	6-packs	2	4	1/3	7.7	335	61 1/8"	24 1/4"	35 5/8"	
<b>TBB-24GAL-60G</b>	133	6-packs	2	4	1/3	7.7	350	59 7/8"	24 1/4"	34 1/4"	
<b>STAINLESS STEEL</b>											
<b>TBB-24-48-S</b>	82	6-packs	2	4	1/3	7.0	260	49 1/8"	23 7/8"	35 5/8"	
<b>TBB-24GAL-48-S</b>	82	6-packs	2	4	1/3	7.0	250	47 1/8"	23 3/4"	34 1/4"	
<b>TBB-24-60-S</b>	133	6-packs	2	4	1/3	7.0	315	61 1/8"	23 7/8"	35 5/8"	
<b>TBB-24GAL-60-S</b>	133	6-packs	2	4	1/3	7.0	320	59 7/8"	23 3/4"	34 1/4"	
<b>STAINLESS STEEL GLASS DOORS</b>											
<b>TBB-24-48G-S</b>	82	6-packs	2	4	1/3	7.6	270	49 1/8"	24 1/4"	35 5/8"	
<b>TBB-24GAL-48G-S</b>	82	6-packs	2	4	1/3	7.6	275	47 1/8"	24 1/4"	34 1/4"	
<b>TBB-24-60G-S</b>	133	6-packs	2	4	1/3	7.7	335	61 1/8"	24 1/4"	35 5/8"	
<b>TBB-24GAL-60G-S</b>	133	6-packs	2	4	1/3	7.7	355	59 7/8"	24 1/4"	34 1/4"	

### 24" BACK BAR COOLER (SLIDE GLASS DOOR)

<b>TBB-24-48G-SD</b>	61	6-packs	2	4	1/3	7.6	280	49 1/8"	23 7/8"	35 5/8"
----------------------	----	---------	---	---	-----	-----	-----	---------	---------	---------

### 24" BACK BAR/DIRECT DRAW BEER DISPENSERS

Model	(Left Dr.)		(Right Dr.)		# of Doors	Shelves	HP	Amps	Wt.	Crated		
	1/2 Barrels	12oz. Cans	1/2 Barrels	12oz. Cans						L	D†	H*
<b>SOLID DOORS</b>												
<b>TDB-24-48</b>	1	245			2	2	1/3	7.0	280	49 1/8"	23 7/8"	35 5/8"
<b>GLASS DOORS</b>												
<b>TDB-24-48G</b>	1	245			2	2	1/3	7.6	290	49 1/8"	24 1/4"	35 5/8"
<b>COMBO DOORS</b>												
<b>TDB-24-48-1-G-1</b>	1	245			2	2	1/3	7.6	285	49 1/8"	24 1/4"	35 5/8"

\* Add 1 5/4" to height for draft arm

† Depth does not include 1 3/8" for door handle (glass door models only)

## Bottle Coolers

### Features / Benefits

- Oversized, environmentally friendly (134A) refrigeration system
- Provides ice cold products 33°F to 38°F - very fast pull-down capacity
- Positive guided, forced air cooling - cools bottles on top first
- Attractive, wear-resistant laminated heavy duty black vinyl exterior
- All stainless steel countertop and lids
- Interior - long lasting heavy duty galvanized steel. NSF approved for pre-packaged and bottled goods
- Huge capacity requires minimum floor space
- Large evaporator coil virtually runs length of cooler for efficient balanced cooling

- Foamed-in-place, high density polyurethane insulation (CFC free)
- Heavy duty 10 mil thick pure grade PVC coated adjustable bin dividers for maximum storage use
- Rugged built-on removable bottle cap opener and cap catcher
- Self-contained system
- Available with optional legs or 3" or 2 1/2" diameter castors
- Available with optional ratchet locks for added security

### Stainless Steel Models

- Stainless steel exterior, countertop and lids for those who appreciate the value of stainless

### Low Temperature Models

- Oversized, environmentally friendly (R404A) refrigeration system
- Hold 20°F for applications with high ambient temperatures. Designed for full alcohol beverages only. (note: some low alcohol products freeze below 32°F)
- Remote units available



TD-50-18-S



TD-24-7



TD-95-38



### HORIZONTAL BOTTLE COOLERS - DEEP WELL

Model	# of Lids	Capacity (12 oz. btls.* / 12 oz. cans)	Bin Dividers	HP	Amps	Crated Wt.	L	D†	H
TD-24-7	1	4 1/2 cases / 6 cases	2	1/6	4.1	165	24 3/4"	26 5/8"	33 3/8"
TD-36-12	1	11 cases / 14 1/2 cases	2	1/5	4.6	205	36 3/4"	26 5/8"	33 3/8"
TD-50-18	2	16 1/2 cases / 24 cases	3	1/3	7.3	245	49 5/8"	26 5/8"	33 3/8"
TD-65-24	2	22 cases / 32 1/2 cases	4	1/3	7.3	290	64 5/8"	26 5/8"	33 3/8"
TD-80-30	3	30 cases / 42 cases	6	1/3	8.7	365	80 1/2"	26 5/8"	33 3/8"
TD-95-38	3	37 1/2 cases / 55 cases	7	1/2	9.2	465	95 3/8"	26 5/8"	33 3/8"
<b>STAINLESS STEEL</b>									
TD-24-7-S	1	4 1/2 cases / 6 cases	2	1/6	4.1	165	24 3/4"	26 5/8"	33 3/8"
TD-36-12-S	1	11 cases / 14 1/2 cases	2	1/5	4.6	210	36 3/4"	26 5/8"	33 3/8"
TD-50-18-S	2	16 1/2 cases / 24 cases	3	1/3	7.3	245	49 5/8"	26 5/8"	33 3/8"
TD-65-24-S	2	22 cases / 32 1/2 cases	4	1/3	7.3	285	64 5/8"	26 5/8"	33 3/8"
TD-80-30-S	3	30 cases / 42 cases	6	1/3	8.7	375	80 1/2"	26 5/8"	33 3/8"
TD-95-38-S	3	37 1/2 cases / 55 cases	7	1/2	9.2	455	95 3/8"	26 5/8"	33 3/8"

### LOW TEMPERATURE HORIZONTAL BOTTLE COOLERS (20°F)

TD-24-7-LT	1	4 1/2 cases / 6 cases	2	1/4	6.5	N/A	24 3/4"	26 5/8"	33 3/8"
TD-36-12-LT	1	11 cases / 14 1/2 cases	2	1/4	6.5	N/A	36 3/4"	26 5/8"	33 3/8"
TD-50-18-LT	2	16 1/2 cases / 24 cases	3	1/3	8.2	N/A	49 5/8"	26 5/8"	33 3/8"
TD-65-24-LT	2	22 cases / 32 1/2 cases	4	1/3	8.2	N/A	64 5/8"	26 5/8"	33 3/8"
TD-95-38-LT	3	37 1/2 cases / 55 cases	7	1/2	11.0	N/A	95 3/8"	26 5/8"	33 3/8"
<b>STAINLESS STEEL</b>									
TD-24-7-S-LT	1	4 1/2 cases / 6 cases	2	1/4	6.5	N/A	24 3/4"	26 5/8"	33 3/8"
TD-36-12-S-LT	1	11 cases / 14 1/2 cases	2	1/4	6.5	N/A	36 3/4"	26 5/8"	33 3/8"
TD-50-18-S-LT	2	16 1/2 cases / 24 cases	3	1/3	8.2	N/A	49 5/8"	26 5/8"	33 3/8"
TD-65-24-S-LT	2	22 cases / 32 1/2 cases	4	1/3	8.2	N/A	64 5/8"	26 5/8"	33 3/8"
TD-95-38-S-LT	3	37 1/2 cases / 55 cases	7	1/2	11.0	N/A	95 3/8"	26 5/8"	33 3/8"

\* 12 oz. longneck bottles

† Depth does not include 1 1/2" for cap catcher and 1" for rear bumpers

## Ice Machines

### Prodigy™ Cubers

- Uses significantly less energy and water
- Auto-Alert™ indicator lights constantly communicate operating status
- Patented WaterSense™ adaptive purge control delivers maximum reliability by reducing scale buildup
- Preventative maintenance is simpler with diagnostic code display
- Optional Vari-Smart™ ice level control, along with the Smart-Board™ allows the ability to program ice levels for up to 7 days
- Available in air cooled, water cooled or remote
- 115V
- 3 year warranty on parts and labor on all components, 5 year warranty on parts and labor on evaporator, 5 years on parts on the compressor and condenser

	WIDTH	VOLTAGE	ICE PRODUCTION*/24 HRS.		
			AIR COOLED	WATER COOLED	REMOTE COOLED
<b>C0322</b>	22"	115V	356 lb.	366 lb.	-
<b>C0522</b>	22"	115V	475 lb.	549 lb.	517 lb.
<b>C0330</b>	30"	115V	350 lb.	400 lb.	-
<b>C0530</b>	30"	115V	562 lb.	595 lb.	511 lb.
<b>C0630</b>	30"	208-230V	776 lb.	722 lb.	684 lb.
<b>C0830</b>	30"	208-230V	905 lb.	924 lb.	870 lb.
<b>C1030</b>	30"	208-230V	1077 lb.	1009 lb.	996 lb.
<b>C1448</b>	48"	208-230V	1553 lb.	1444 lb.	1357 lb.
<b>C1848</b>	48"	208-230V	1909 lb.	1900 lb.	1828 lb.
<b>C2148</b>	48"	208-230V	-	2091 lb.	2248 lb.

*\*ICE PRODUCTION BASED ON 70°F AIR, 50° WATER TEMPS.*



**C0330  
WITH ICE BIN**



### Modular Contour Cubers

- AutoIQ™ Control System monitors and controls the ice machines' functions to ensure consistent ice production and reduce operating costs
- Rust-free polyethylene base and food zone is insulated with 1½" of foam which keeps water and food zone cool to reduce operating costs and is backed by a Lifetime Rust-free Warranty
- Contemporary styling and stainless steel finish make the CM³ a perfect addition to any operation
- 3 years part and labor warranty; 5 year parts and labor warranty on the CME evaporator; 5 year parts warranty on compressor and condenser
- CME506/BH550 also available in remote



**CME256/HTB250**



	BIN STORAGE	ICE PRODUCTION*/24 HRS.	
		AIR COOLED	WATER COOLED
<b>CME256/HTB250</b>	250 lb.	307 lb.	320 lb.
<b>CME506/BH550</b>	520 lb.	500 lb.	510 lb.

*\*ICE PRODUCTION BASED ON 70°F AIR, 50° WATER TEMPS.*

## Undercounter Compact Cubers w/Storage

- Removable cabinetry facilitates easy access for maintenance
- Front access to air filter, control box, water pump and float
- With removable, cleanable air filter
- Cabinet constructed of durable rust-free rotocast plastic
- Available in Air-Cooled (A) or Water Cooled (W)
- 115V
- **SCE170** - 24 $\frac{1}{4}$ " w. x 24" d. x 39" h. w/legs
- **SCE275** - 30" w. x 30" d. x 39" h. w/legs



	BIN STORAGE	ICE PRODUCTION*/24 HRS.	
		AIR COOLED	WATER COOLED
<b>SCE170</b>	70 lb.	165 lb.	165 lb.
<b>SCE275</b>	90 lb.	290 lb.	305 lb.

*\*ICE PRODUCTION BASED ON 70°F AIR, 50° WATER TEMPS.*

## Nugget Ice Machine with AutoSentry™

- AutoSentry™ Monitoring System constantly checks workload on gearbox shutting down system before a problem develops preventing costly repairs
- Electrical conductivity water sensor eliminates low or no water failures and cannot be affected by adverse water conditions
- Plastic drain pan with larger outlet provides greater ability to quickly channel water away preventing particulate build-up and rust
- Rust and restriction free drain system features one-plastic drain tubes with larger ID for obstruction-free water flow
- Durable, high grade stainless steel construction with massive, self-aligning spherical roller bearings; patented double-flight auger that evenly distributes the load and heavy duty direct drive gearbox for high reliability and long life, R-404A refrigerant
- 24 hour volume production based on Air/Water\* temperatures
- 3 years part and labor warranty; 5 year parts warranty on compressor
- Available in air-cooled and water-cooled
- 21" w. x 24" d. x 27" h., 115V

	ICE PRODUCTION*/24 HRS.
<b>NME454AS</b>	Air Cooled, 460 lb.
<b>NME454WS</b>	Water Cooled, 510 lb.

*\*ICE PRODUCTION BASED ON 70°F AIR, 50° WATER TEMPS.*



**NME454**  
SHOWN W/BH550 ICE BIN



## Walk-Ins

### Walk-In Coolers and Freezers

- Foamed-in-place urethane panels with speed-lok fastening system
- Full 36" x 78" door complete with structural frame
- Galvalume finish interior and exterior
- Freezers with 10 gauge smooth aluminum floor
- Full line of pre-assembled remote or self-contained refrigeration equipment



- 5'-10" x 5'-10"
- 5'-10" x 7'-9"
- 5'-10" x 9'-8"
- 5'-10" x 11'-7"
- 7'-9" x 7'-9"
- 7'-9" x 9'-8"
- 7'-9" x 11'-7"
- 9'-8" x 9'-8"
- 9'-8" x 11'-7"



**QUICK SHIP WALK-INS AVAILABLE IN 5 WORKING DAYS AS FOLLOWS:**  
**7'-2" AND 8'-2" COOLERS LESS FLOOR PANELS**  
**7'-6" AND 8'-6" FREEZERS WITH FLOOR PANELS**  
**GALVALUME FINISH, PRE-ASSEMBLED REMOTE RFG. INDOOR OR OUTDOOR WALK-INS**

**For the Best Equipped Cooler or Freezer, specify the Brown Xpress!**

Brown Xpress satisfies the demands of the foodservice industry. Each unit is built with features that deliver years of solid performance.

**FEATURES:**

- Heavy duty hardware guaranteed for five years
- A rugged door with 14 ga. welded steel Addision™ H frame
- R-30 Insulation Value in all panels
- Quick pricing, excellent customer service, and superior lead times
- Drop-in self contained refrigeration systems – no drain required
- An outstanding warranty and freight plan – ask your NAFED sales representative for details



**Craftsmanship Without Compromise**

## Walk-Ins

### Kold Locker™ Walk-Ins

**10,000 MODELS AVAILABLE TO SHIP THE SAME DAY!  
COMBINATION COOLER/FREEZERS SHIP THE SAME DAY!**

- Cooler, freezer or combination cooler/freezer models
- CFC Free HFC-134a polyurethane insulation
- Exclusive Capsule Pak refrigeration system
- Flush Coil, 100% usable interior space
- Automatic condensate vaporizer – no DRAIN LINE required on indoor units
- Spring actuated door closer
- Three heights: 6'7" & 7'7" with floor, 7'4" floorless
- Capacity from 77 cu. ft. to 1,000 cu. ft.
- NL 2400 adjustable hinge
- Indoor or outdoor models
- Installation that is fast and easy
- NL 9800 deadbolt locking handle (standard)
- 15 year panel warranty
- Sizes from 3'6" x 6' to 8' x 20'
- 5" thick panels available to meet CEC - Contact your sales rep for more information
- Temperatures: 35° F to 38° F, -10° F, -20° F
- Exterior finish: corrosion resistant stucco embossed coated steel
- 26" wide self closing door
- FRP threshold
- Registered by UL to ISO 9001: 2000

#### Single Compartment Sizes


**The 45 Series** is available in one size which is 4' w. x 5' l. x 6' h. This model is supplied with a walk-in floor.

**The Standard Series** of Kold Locker™ walk-ins are all 6'7" high and are all supplied with a floor. The sizes available are as follows: 4' w. x 6' l., 6' w. x 6' l., 6' w. x 8' l., 6' w. x 10' l., 6' w. x 12' l., 8' w. x 8' l., 8' w. x 10' l.

**The 77 Series** of Kold Locker™ walk-ins are all 7'7" high and are all supplied with a floor. The sizes available are as follows: 6' w. x 6' l., 6' w. x 8' l., 6' w. x 10' l., 6' w. x 12' l., 8' w. x 8' l., 8' w. x 10' l.

**The 74 Series** of Kold Locker™ walk-ins are all 7'3½" high and are all supplied without a floor. Wall panels are installed on top of N.S.F. listed vinyl sealers provided. The sizes available are as follows: 6' w. x 6' l., 6' w. x 8' l., 6' w. x 10' l., 6' w. x 12' l., 8' w. x 8' l., 8' w. x 10' l.



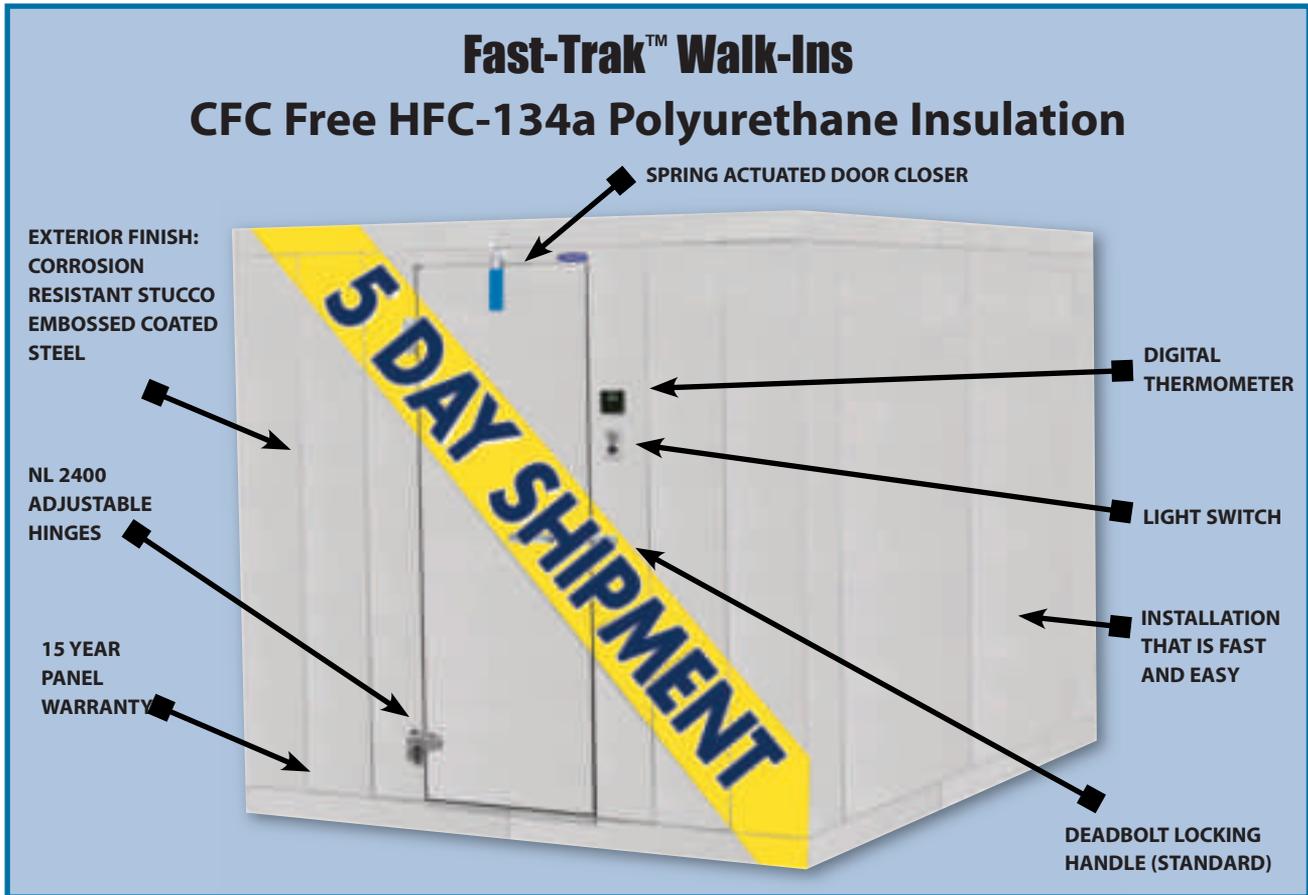

**Fast-Trak™ Walk-Ins**

- Unlimited lengths in 1' increments!
- Available in widths of: 6', 7', 8', 9', 10', 11' & 12'
- Three heights: 7'7" & 8'7" with floor' 7'4" & 8'4" floorless
- FRP threshold
- Remote Refrigeration Systems in stock for 5 day shipment
- Cooler, freezer or combination cooler/freezer models
- Installation is fast and easy
- Indoor or outdoor models
- 30" or 36" self closing door
- ISO 9001: 2000

**Available in  
 Unlimited Lengths  
 Ship in 5 Days!**




## Air Curtains, Patio Heaters & Rack Cover

### Zephyr ZPR 8' Air Door

Quiet operation with high performance makes the 7½" high Zephyr ideal for any low-clearance application.

- Up to 8' of protection for pass thru windows, conveyor doors, shopping cart doors, customer entry & patio openings
- ½ hp. direct driven motor(s)
- Patented Intelliswitch programmable controller
- Aluminum air directional vanes & exterior cabinet
- Wall mounting plate and ¼" threaded inserts for top mounting
- Aluminum cross-flow blower wheels
- Five year parts warranty (unheated), two year (heated)

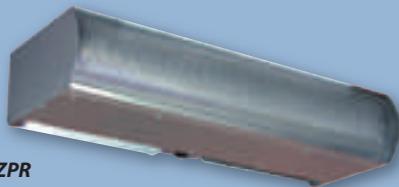


ZPR

### In-Ceiling Mount FCM 10' Air Door

The 3-speed In-Ceiling Mount air curtain will protect your openings and warm your vestibule discreetly positioned in your ceiling.

- 10' environmental separation for customer entry
- ½ hp. three speed motor(s)
- Lockable airfoil aluminum air directional vanes
- Filter included
- White aluminum exterior
- Adaptable to most ceilings
- Five year parts warranty (unheated), two year (heated)

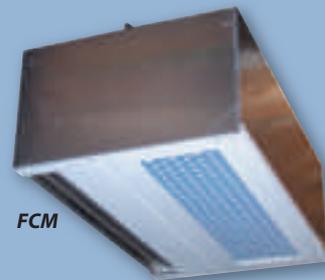


FCM



### Aristocrat ASR 10' Air Door

Competitive pricing creates affordable protection with Berner's Aristocrat air door.

- Up to 10' of protection for service, customer entry, shipping/receiving doors and conveyor opening
- 3 speed with ¾ hp. direct driven motor(s)
- Factory Installed Switch (Electric, heated and 3-speed only)
- Lockable airfoil aluminum air directional vanes
- Aluminum base frame & housing (S/S housing available)
- Wall mount installation
- Five year parts warranty (Five year unheated, Two year heated)

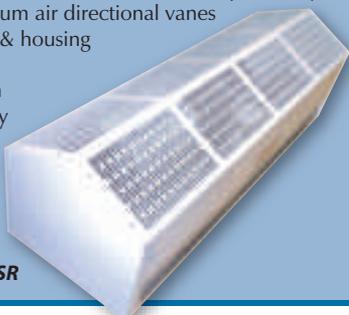


ASR

### K-ZONE KZR 8' Air Door

Low clearance and competitive pricing combine to create affordable protection with Berner's K-Zone air door.

- Provides protection for up to 8' for walk-ins, drive thru windows, patio openings & customer service doors
- ½ hp. direct driven motor(s)
- Variable speed switch
- Aluminum air directional vanes
- White powder coated or S/S cabinet
- Wall mounting plate
- Threaded inserts for top mounting
- Aluminum cross-flow blower wheels
- Five year parts warranty

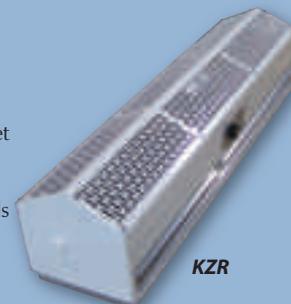

KZR



### Bakery Rack Cover

Provides protection and easy viewing while protecting food from contamination.

- Economical 12 mil clear PVC
- Keeps food fresh and clean
- Aids in proofing and retarding
- Reduces drying and crusting of dough
- Helps prevent freezer burn and odor transfer
- Hold trays in position while transporting
- Reinforced seams
- Heavy-duty nylon zippers
- Heavy-duty wall hook
- End load access flap
- 23" w. x 28" d. x 62" h.

BIC12-CE



### Berner Patio Plus 4000 Heaters

Extend your patio hours with these heaters. Reinforced double heating mantle for radiant heat output. Available in stainless, hammered bronze or black finishes.

#### SERIES 4000 WHEN...

- Portability is mandatory
- Wide area with no posts, beams or walls to mount patio heaters
- Piping of fuel is not practical

#### PORTABLE MODELS

- Available in stainless steel, durable powder coating or hammered bronze
- Fold-away wheels (except economy model)
- Easy storage (reflector can be disassembled for storage)
- Battery operated ignition
- Adjustable heat intensity for comfort & energy savings
- Flexibility to change layout and location
- 32¼" w. x 89¼" h.

#### FIXED MODELS

- Floor or concrete mounted with in-ground post adaptor
- Piped from central fuel supply— no tanks to change or re-fill
- 32" w. x 88½" h.

#### PORTABLE LP, 46,000 BTU

- PHB1001LP** Standard, Stainless Steel
- PHB1005LP** Standard, Hammered Bronze
- PHB1003LP** Economy, Black

#### FIXED

- PHB1004NG** Black, Natural, 45,000 BTU
- PHB1004LP** Black, LP, 46,000 BTU
- PHB1004NG-SS** Stainless Steel, Natural, 45,000 BTU
- PHB1004LP-SS** Stainless Steel, LP, 46,000 BTU

